

30-039-07759

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 25 Twp 30 Rng 7

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #79

cps 209w

Elevation 6386' Completion Date 7/21/66 Total Depth 300' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 5000 lbs.

Depths anodes placed: 270', 264', 258', 252', 246', 240', 234', 228'

Depths vent pipes placed: 270' of 3/4" HOSE

Vent pipe perforations: N/A

Remarks: qb #2

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

RECEIVED
MAY 31 1991
OIL CON. DIV
DIST. 3

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG


Date 11-21-66

Well Name <u>3J 30-6 #79 (Was MCE/Vain #6A)</u>			CPS No. <u>209W</u>		
Location <u>3W 25-30-7</u>			Work Order No. <u>184-52289-50-20</u>		
Anode Hole Depth <u>300</u>	Total Drilling Rig Time <u>33 Hrs</u>	Type & Size Bit Used <u>7 7/8-25008 = 300'</u>		No. Sacks Mud Used <u>9</u>	
No. Sacks Lost Circulation Mat'l Used <u>3</u>	Anode Depth				
	# 1 <u>270</u>	# 2 <u>264</u>	# 3 <u>258</u>	# 4 <u>252</u>	# 5 <u>246</u>
Total Lbs. Coke Used <u>5000</u>	Anode Output (Volts)				
	# 1 <u>4.4</u>	# 2 <u>4.2</u>	# 3 <u>3.4</u>	# 4 <u>3.6</u>	# 5 <u>3.8</u>
Total Circuit Resistance	No. Ft. Surface Cable Conduit				
Volts <u>11.2</u>	Amps <u>8.3</u>	Ohms <u>1.35</u>	<u>2312 Anodes 275 surface = 2587</u>		

7	234	8	228
7	4.4	8	4.1

Drilling Log (Attach Hereto). ☐

Remarks: 3/4" Plastic Hose to No. 1 Anode
15 lbs Chemical to G.B.

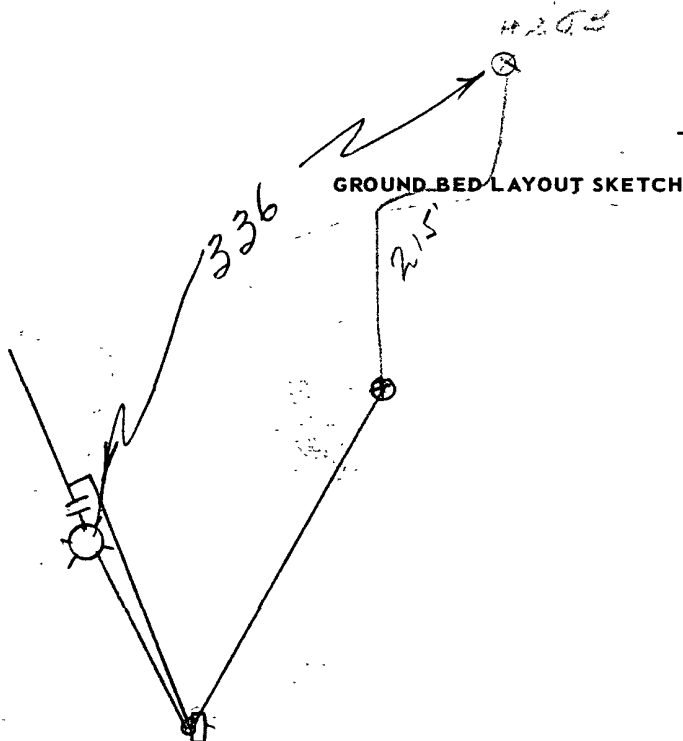

All Construction Completed

Barrels
(Signature)

19/6/15

EVENING

1994

NO. DC	SIZE	LENG.	NO. DC	SIZE	LENG.	NO. DC	SIZE	LENG.	NO. DC	SIZE	LENG.
BIT NO.	25008	0H	BIT NO.	25008	0H	BIT NO.	25008	0H	BIT NO.	25008	0H
SERIAL NO.	478		SERIAL NO.	478		SERIAL NO.	478		SERIAL NO.	478	
SIZE	478		SIZE	478		SIZE	478		SIZE	478	
TYPE	478		TYPE	478		TYPE	478		TYPE	478	
MAKE	478		MAKE	478		MAKE	478		MAKE	478	
NO. DC	SIZE	LENG.	NO. DC	SIZE	LENG.	NO. DC	SIZE	LENG.	NO. DC	SIZE	LENG.
BIT NO.	25008	0H	BIT NO.	25008	0H	BIT NO.	25008	0H	BIT NO.	25008	0H
SERIAL NO.	478		SERIAL NO.	478		SERIAL NO.	478		SERIAL NO.	478	
SIZE	478		SIZE	478		SIZE	478		SIZE	478	
TYPE	478		TYPE	478		TYPE	478		TYPE	478	
MAKE	478		MAKE	478		MAKE	478		MAKE	478	
NO. DC	SIZE	LENG.	NO. DC	SIZE	LENG.	NO. DC	SIZE	LENG.	NO. DC	SIZE	LENG.
BIT NO.	25008	0H	BIT NO.	25008	0H	BIT NO.	25008	0H	BIT NO.	25008	0H
SERIAL NO.	478		SERIAL NO.	478		SERIAL NO.	478		SERIAL NO.	478	
SIZE	478		SIZE	478		SIZE	478		SIZE	478	
TYPE	478		TYPE	478		TYPE	478		TYPE	478	
MAKE	478		MAKE	478		MAKE	478		MAKE	478	

11-2-11

7000

五

Paul & Mary

DATE	TIME	REMARKS	REMARKS
7-15-66	Left Old Loc. At 3:00	Moved to New Loc. Drilled from 0' to 110 ft with #8 DWS. 6" dia.	
Left	8:19 AM 5:00		

7-18 66 - Left CIND AT 6:00 AM USED OC AT 7:30 AM COST CND USED 3 mud - 1 haul, moved to land helix

7-17-66 - LEFT WARD AT 6:08 ARRIVED 8:47 - 1:30 DRILLED FROM 40 FT TO 200 FT. LOST 2 CIRC. USED 3 MUD - 1 HELIX 1547
8-1-66 - 6:51 - 2:04 8:15 CHANGED TO 1/8 INCHES AND LEFT WARD AT 5:00

10:66: LEFT YARD AT 1:00 ARRIVED HOME AT 7:30. LOST C.W.C. USED 3 MUD - 1 MUD OK. LLED FROM 200 FT TO 280 FT.

LEFT KING AT 5:00 - USED 3 LOADS WATER
7-21-66 - LEFT KING AT 6:06 ARRIVED KING AT 7:30, DROVE FROM 280 FT TO 300 FT. CHANGED HOLE OUT MOVED OFF AT 11:00
SIGNED _____
Toolpusher _____
Company/Supervisor _____

SIGNED: Todd Bush

Company, Supervisor

Diffenbach