Form 3160-3 (April 2004)

> UNITED STATES DEPARTMENT OF THE INTERIOR

BUREAU OF LAND MANAGEMENT

RECEIL

FORM APPROVED OMB No. 1004

Lease Serial No.
NMNM-036585

			1.1	とってはだけ	6
PPLICATION	FOR PERMIT	TO DRILL OR	RÊÊÑTER	7444070	0.

If Indian, Allotee or Tribe Name Α N/A 7. If Unit or CA Agreement, Name and No. **✓** DRILL la. Type of work: REENTER 8. Lease Name and Well No. ✓ Oil Well Gas Well ✓ Single Zone Multiple Zone lb. Type of Well: **BISTI GALLUP 29 #11** Name of Operator 9. API Well No. ELM RIDGE EXPLORATION COMPANY, LLC 30-045- 34157 3a. Address P.O. BOX 156 3b. Phone No. (include area code) 10. Field and Pool, or Exploratory **BLOOMFIELD, NM 87413** (505) 632-3476 **BISTI LOWER-GALLUP** Location of Well (Report location clearly and in accordance with any State requirements.*) 11. Sec., T. R. M. or Blk. and Survey or Area 1960' FSL & 1980' FWL At surface **K** 29-25N-12W NMPM At proposed prod. zone SAME 12. County or Parish 13. State 14. Distance in miles and direction from nearest town or post office* 27 MILES SSE OF FARMINGTON, NM SAN JUAN NM

Distance from proposed 17. Spacing Unit dedicated to this well 16. No. of acres in lease location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 660 804.99 N2SW4 (= 80 acres) 18. Distance from proposed location* to nearest well, drilling, completed, 20. BLM/BIA Bond No. on file 19. Proposed Depth BLM STATE WIDE 886201C NM 2858 1,096' (BC 29-2) 4,900' applied for, on this lease, ft.

Elevations (Show whether DF, KDB, RT, GL, etc.) 6,388' GL

22 Approximate date work will start* 07/01/2007

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, shall be attached to this form:

- 1. Well plat certified by a registered surveyor.
- 2. A Drilling Plan.
- 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).

23. Estimated duration

3 WEEKS

- 5. Operator certification
- 6. Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature	Name (Printed/Typed) BRIAN WOOD	Date 02/05/2007
Title CONSULTANT	PHONE: (505) 466-8120 FAX: (505) 466-9682	
Approved by (Signature)	Name (Printed/Typed)	Date 3/19/88
Title AFM	Office F	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on page 2)

NOTIFY AZTEC OCD 24 HRS. PRIOR TO CASING & CEMENT

MAR 2 4 2008 NMOCD A

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

State of New Mexico

Revised October 12, 2005

Energy, Minerals & Natural Resources Department EIVED

OIL CONSERVATION DIVISIONATION G. Submit to Appropriate District Office

State Lease - 4 Copies

1220 South St. Francis Dr.


Fee Lease - 3 Copies

Form C-102

Santa Fe, NM 87505

1220 S. St. Francis	Dr., Santa l	Fe, NM 87505			,				AME	NDED REPORT
		W	ELL LO	OCATIO	N AND ACR	EAGE DEDIC	ATION PLA	T		
¹ API Number			² Pool Code 5 8 9 0	:	BISTI LOV	/ER - GA	LLUP			
Property 6		BIST	I GALLUF	29	⁵ Property I	Name			6	Vell Number 11 •
⁷ OGRID №.		RIDGE EX	(PLORATIO	⁸ Operator I N COMPANY, LL					Elevation 88	
					¹⁰ Surface	Location				
UL or lot no.	Section	Township	Range	Lot lda	Feet from the		Feet from the	East/We	est line	County
K	29	25N	12W	К	1960	S0UTH	1980	WEST		SAN JUAN
•	q	•	• 11 Bo	ottom Ho	le Location It	Different Fron	n Surface	•		•
UL or lot no.	Section	Township	Range		Feet from the	North/South line	Feet from the	East/We	st line	County
12 Dedicated Acres		r Infill ¹⁴ C	onsolidation	Code 15 Or	der No.					

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

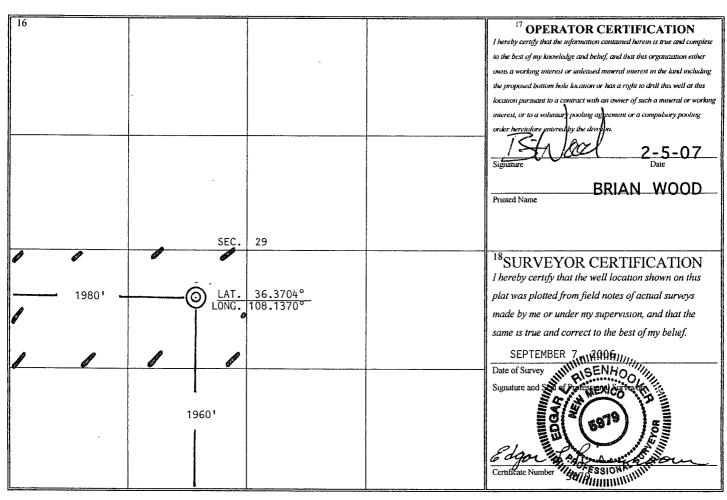

Submit 3 Copies To Appropriate District Office District I	State of New Mexico Energy, Minerals and Natural Resources	Form C-103 May 27, 2004
1625 N. French Dr., Hobbs, NM 88240		WELL API NO.
<u>District II</u> 1301 W Grand Ave., Artesia, NM 88210	OIL CONSERVATION DIVISION	30-045- 34157
District III	1220 South St. Francis Dr.	5. Indicate Type of Lease STATE FEE
1000 Rio Brazos Rd , Aztec, NM 87410 District IV	Santa Fe, NM 87505	STATE FEE 6. State Oil & Gas Lease No.
1220 S. St. Francis Dr., Santa Fe, NM 87505		NMNM-036585
SUNDRY NOT	ICES AND REPORTS ON WELLS	7. Lease Name or Unit Agreement Name
(DO NOT USE THIS FORM FOR PROPO DIFFERENT RESERVOIR. USE "APPLIC PROPOSALS.)	SALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A CATION FOR PERMIT" (FORM C-101) FOR SUCH	BISTI GALLUP 29
· · · · · · · · · · · · · · · · · · ·	Gas Well Other	8. Well Number 11
2. Name of Operator ELM RIDGE EXPLORATION CO	OMPANY, LLC	9. OGRID Number 149052
3. Address of Operator	,	10. Pool name or Wildcat
P. O. BOX 156, BLOOMFIELD, N	JM 87413	BISTI LOWER-GALLUP
4. Well Location		-
Unit Letter: K	1960' FSL & 1980' FWL	
Section 29	Township 25 North Range 12 West	NMPM SAN JUAN County
	11. Elevation (Show whether DR, RKB, RT, GR, etc.)	
Parallel Bury III Britaly	6,388' GL	
Pit of Below-grade Tank Application o		
Pit type: DRILLING Depth to Groundwa	ater: <u>>50'</u> Distance from nearest fresh water well: <u>>5,000'</u> Distanc	ce from nearest surface water: >100' (borrow ditch)
Pit Liner Thickness: 12 mil	Below-Grade Tank: Volume bbls; Const	truction Material
12. Chec	ck Appropriate Box to Indicate Nature of Noti	ice, Report or Other Data
NOTICE OF IN	ITENTION TO:	SEQUENT REPORT OF:
PERFORM REMEDIAL WORK	PLUG AND ABANDON REMEDIAL WOR	
TEMPORARILY ABANDON	CHANGE PLANS COMMENCE DRI	
PULL OR ALTER CASING	MULTIPLE COMPL CASING/CEMEN	
		
OTHER: DRILLING PIT	OTHER:	
	leted operations. (Clearly state all pertinent details, and	
recompletion.). SEE RULE 1103. For Multiple Completions: Attach	i wellbore diagram of proposed completion or
recompletion.		
	•	
•		
I hereby certify that the information a	Hove is true and complete to the best of my knowledge	and helief. I further cartify that any nit or helow-grade tank
has been/will be constructed or closed according	rding to NMOCD guidelines , a general permit or an (attack	hed) alternative OCD-approved plan .
15 Jan 1	/	
SIGNATURE / JUNE /	TITLE: CONSULTANT	DATE: FEB. 5, 2007
Type or print name: BRIAN WOOD For State Use Only	E-mail address: brian@permitswest.com	Telephone No.: (505) 466-8120
A State Out Only	Deputy Oil & Ge	AS INSPECTOR,
APPROVED BY:	TITLE District	DATE MAR 2 4 2006
Conditions of Approval (if any):	•	

APPROVED BY: _______Conditions of Approval (if any):

Drilling Program

1. ESTIMATED FORMATION TOPS

<u>Formation</u>	<u>GL Depth</u>	<u>KB Depth</u>	<u>Elevation</u>
Nacimiento	. 0'	. 12'	+6,388'
Fruitland	918'	930'	+5,470'
Pictured Cliffs	1,193'	1,205'	+5,195'
Lewis Shale	1,288'	1,300'	+5,100'
Cliff House	~ 1,888 '	1,900'	+4,500'
Menefee Shale	2,388'	2,400'	+4,000'
Point Lookout	3,513'	3,525'	+2,875'
Mancos Shale	3,688'	3,700'	+2,700'
Gallup Sandstone	4,588'	4,600'	+1,800'
Total Depth	4,900'	4,912'	+1,488'

2. NOTABLE ZONES

Oil &/or Gas Zones	Water Zones	<u>Coal Zone</u>
Fruitland	Nacimiento	Fruitland
Pictured Cliffs	Fruitland	
Gallup	Pictured Cliffs	

Water zones will be protected with casing, cement, and weighted mud. Fresh water encountered during drilling will be recorded by depth, cased, and cemented. Oil and gas shows will be tested for commercial potential based on the well site geologist's recommendations.

3. PRESSURE CONTROL

The drilling contract has not yet been awarded, thus the exact BOP model to be



used is not yet known. A typical 2,000 psi model is on PAGE 3.

A \geq 2,000 psi BOP and choke manifold system will be installed and tested to 2,000 psi before drilling surface casing plug. It will remain in use until the well is completed or abandoned. A safety valve and sub with a full opening valve to fit the drill pipe and collars will be available on the rig floor in the open position at all times for use when kelly is not in use.

All BOP mechanical and pressure tests will be recorded on the driller's log. BOPs will be inspected and opened and closed at least daily to assure good mechanical working order. Inspections will be recorded on the daily drilling report. Pressure tests will be conducted before drilling out from under all casing strings which are set and cemented in place.

4. CASING & CEMENT

<u>Hole Size</u>	<u>O. D.</u>	Weight (lb/f	<u>ft) Grade</u>	<u>Type</u>	<u>Age</u>	Depth Set
12-1/4"	8-5/8"		J-55 or K-55	ST&C	New	350'
7-7/8"	5-1/2"	1,Ø.5 15.5 #	J - 55	LT&C	New	4,900'
		12.5				

Surface casing will be cemented to the surface with ≈ 290 cubic feet (≈ 245 sacks) Class B with 1/4 pound per sack cellophane + 2% CaCl₂. Yield = 1.18 cubic feet per sack. Weight = 15.2 pounds per gallon. Volume = 100% excess. Centralizers will be installed on the middle of the shoe joint and every other centralizer thereafter.

Production casing will be cemented to the surface in 2 stages with a stage tool set @ $\approx 3,400$ '. Centralizers will be installed on the middle of the shoe joint and on every joint thereafter (≈ 2 dozen centralizers). Thread lock the guide shoe, bottom of float collar, and bottom of stage tool only. Use API casing dope.



First stage volume will be ≈ 525 cubic feet consisting of ≈ 125 sacks of Halliburton light with 65/35 poz mix + 1/4 pound per sack cellophane + 2% CaCl₂ (yield = 1.87 cubic feet per sack, weight = 12.7 pounds per gallon) followed by ≈ 250 sacks Class B with 2% CaCl₂ (yield = 1.18 cubic feet per sack, weight = 15.2 pounds per gallon). Volume = >100% excess, but caliper logs will be used to determine actual volume needed.

Second stage volume will be ≈ 1.780 cubic feet consisting of ≈ 631 sacks of Halliburton light with 65/35 poz mix + 1/4 pound per sack cellophane + 2% CaCl₂ (yield = 1.87 cubic feet per sack, weight = 12.7 pounds per gallon) followed by ≈ 50 sacks of Class B with 2% CaCl₂ (yield = 1.18 cubic feet per sack, weight = 15.2 pounds per gallon). Volume will be $\geq 100\%$ excess, but caliper logs will be used to determine actual volume needed.

5. MUD PROGRAM

<u>Depth</u>	<u>Type</u>	ppg	<u>Viscosity</u>	Fluid Loss	<u>Hq</u>
0' - 350'	Fresh water gel chem	9.0	50	NC	9
350' - TD	Fresh water gel chem	9.0	38-50	6.0	9

Enough material to maintain mud properties, control lost circulation, and contain a blowout will be at the well site while drilling. Mud will be checked hourly by rig personnel. Material to soak up possible oil or fuel spills will be on site.

6. CORES, TESTS, & LOGS

No cores or drill stem tests are planned. DIL/GR logs will be run from TD to surface. CNL/FDC logs may be run over selected segments. Samples will be collected every $\approx 10^{\circ}$ through the Gallup. Samples will be collected every $\approx 30^{\circ}$ elsewhere.




7. DOWN HOLE CONDITIONS

No abnormal pressures, temperatures, or hydrogen sulfide are expected. Maximum expected bottom hole pressure will be $\leq 2,100$ psi.

8. OTHER INFORMATION

The anticipated spud date is July 1, 2007. It is expected it will take 1 week to drill and 2 weeks to complete the well.




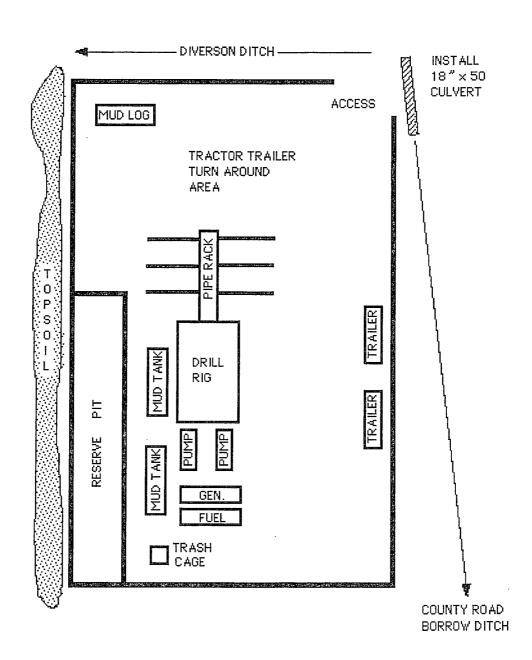





2,000 PSI BOP SYSTEM

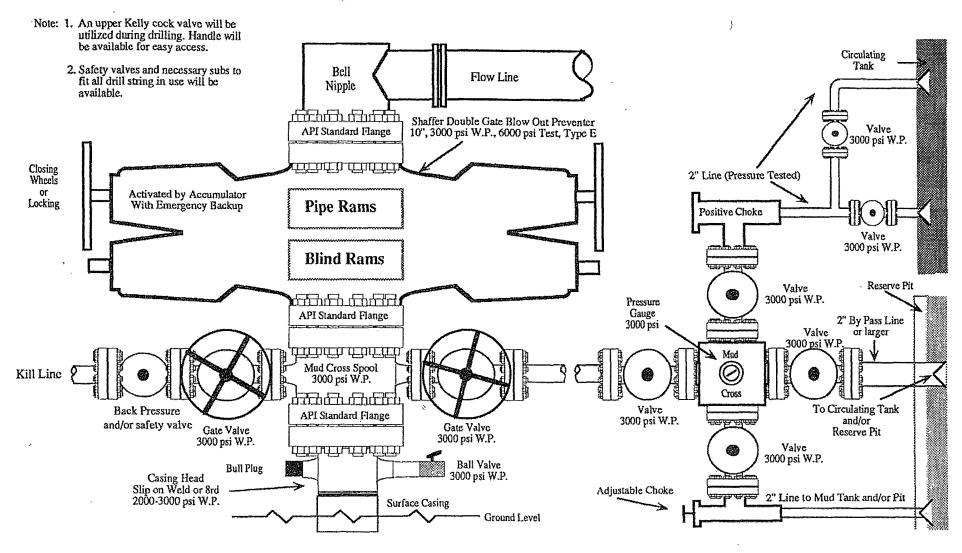

Note: This equipment is designed to meet requirements for a 2-M rating standard per 43 CFR part 3160 (amended). Proper operation and testing of equipment will be carried out per standard. 2,000 psi equipment can be substituted in the drawing to meet minimum requirements per standard.