

8 - 30-039-07726
500 - 30-039-24907

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 31 Twp 30 Rng 7

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #8, #500

cps 276w

Elevation 6002' Completion Date 8/14/74 Total Depth 240' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. WET AT 40'

RECEIVED

MAY 31 1991

Depths gas encountered: N/A

OIL CON. DIV.
DIST. 3

Type & amount of coke breeze used: 4000 lbs.

Depths anodes placed: 215', 205', 195', 185', 175', 165', 155', 145', 135', 125'

Depths vent pipes placed: N/A

Vent pipe perforations: 200'

Remarks: gb #2

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Drilling Log (Attach Hereto). ☐

LOGGED

Completion Date 8/14/77

Well Name <u>SAN JUAN 30-6 #8</u>		Location <u>SW 31 - 30N - 7W</u>		CPS No. <u>276 W</u>	
Type & Size Bit Used <u>6 3/4"</u>				Work Order No. <u>40022</u>	
Anode Hole Depth <u>240'</u>	Total Drilling Rig Time	Total Lbs. Coke Used <u>4,000'</u>	Lost Circulation Mat'l Used	No. Sacks Mud Used	
Anode Depth					
# 1 <u>215</u>	# 2 <u>205</u>	# 3 <u>195</u>	# 4 <u>185</u>	# 5 <u>175</u>	# 6 <u>165</u>
# 7 <u>155</u>	# 8 <u>145</u>	# 9 <u>135</u>	# 10 <u>125</u>		
Anode Output (Amps)					
# 1 <u>3.6</u>	# 2 <u>3.8</u>	# 3 <u>3.6</u>	# 4 <u>3.3</u>	# 5 <u>2.8</u>	# 6 <u>2.6</u>
# 7 <u>2.3</u>	# 8 <u>1.5</u>	# 9 <u>3.3</u>	# 10 <u>3.1</u>		
Anode Depth					
# 11	# 12	# 13	# 14	# 15	# 16
# 17	# 18	# 19	# 20		
Anode Output (Amps)					
# 11	# 12	# 13	# 14	# 15	# 16
# 17	# 18	# 19	# 20		
Total Circuit Resistance		No. 8 C.P. Cable Used		No. 2 C.P. Cable Used	
Volts <u>11.6</u>	Amps <u>12.0</u>	Ohms <u>0.96</u>	<u>43'</u>		

Remarks: Driller said wct @ 40' INJECTION @ 40'
SWITCH TO MUD @ 80' VENT HOSE PERFORATED
200'. Pumped 2 loads of water to surface

3,409.00
17.20 Cable

3,426.20
- 520.00 Depth Credit


2,906.20
116.25 TAX

3,022.45

All Construction Completed

E. R. Paulk
(Signature)

GROUND BED LAYOUT SKETCH

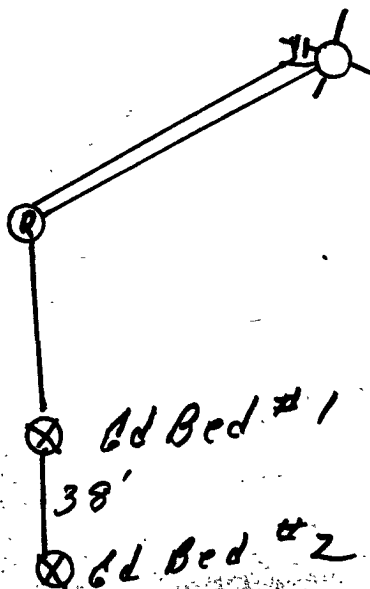

STORM WATER WELL DRILLING INC.

**DIAMOND CORE DRILLING
DIAMOND DRILLING EQUIPMENT
GROUTING
FOUNDATION TESTING
MINING
QUARRYING
SHAFT SINKING
WATER WELL DRILLING**

CONTRACTORS
14991 W. 44TH AVENUE
GOLDEN, COLORADO 80401
PHONE (303) 278-9505

GENERAL OFFICE
14991 W. 44TH AVENUE

BAILEY OFFICE
CALL 1-838-4821

Drill 10 TK.

Date 8-14-74

Owner CPS 276 W

Location

City _____ State ~~TX~~ NM County _____

[illegible]

Total Hours _____

Equipment Down Time _____

Hours Drilling 8 hr

Driller Bill

Helper RAY

Helper Bob

C.P.S. Time _____

S.W.W.D.I. Time _____

Total Footage _____

Approval of

C.P.S. Engineer _____

