

73 - 30-039-07788
467 - 30-039-24475

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec 22 Twp 30 Rng 7

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #73,

SAN JUAN 30-6 UNIT COM #467 cps 280w

Elevation 6635' Completion Date 8/1/66 Total Depth 400' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. N/A

RECEIVED
MAY 31 1991

Depths gas encountered: N/A

OIL CON. DIST. 3

Type & amount of coke breeze used: 4250 lbs.

Depths anodes placed: 360', 354', 336', 330', 324', 310', 304', 204', 198'

Depths vent pipes placed: 360' OF 3/4" HOSE

Vent pipe perforations: 90'

Remarks: gb #2

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Date 8-1-66

Well Name <u>30-6-473</u> <u>Kas McElvain #2</u>			CPS No. <u>280W</u>		
Location <u>SW 22-30-7</u>			Work Order No. <u>184-52490-50-20</u>		
Anode Hole Depth <u>400</u>	Total Drilling Rig Time <u>19 1/2 Hrs</u>	Type & Size Bit Used <u>6 1/4-54 90S = 400'</u>		No. Sacks Mud Used <u>0</u>	
No. Sacks Lost Circulation Mat'l Used <u>0</u>	Anode Depth				
	# 1 <u>360</u>	# 2 <u>354</u>	# 3 <u>336</u>	# 4 <u>330</u>	# 5 <u>324</u>
Total Lbs. Coke Used <u>4250</u>	Anode Output (Volts)				
	# 1 <u>3.9</u>	# 2 <u>3.7</u>	# 3 <u>2.7</u>	# 4 <u>3.2</u>	# 5 <u>3.4</u>
Total Circuit Resistance	No. Ft. Surface Cable Conduit				
Volts <u>10.8</u>	Amps <u>10.3</u>	Ohms <u>1.05</u>	<u>3080 Anodes 168-Surface = 3248</u>		

Drilling Log (Attach Hereto). ☐


Remarks: 3/4" Hose To No. 1 Anode
Perforated 90'
15 lbs Chemical to G.B.

7	304	8	204	9	198
7	3.5	8	3.7	9	3.0

All Construction Completed

[Signature]
(Signature)

GROUND BED LAYOUT SKETCH

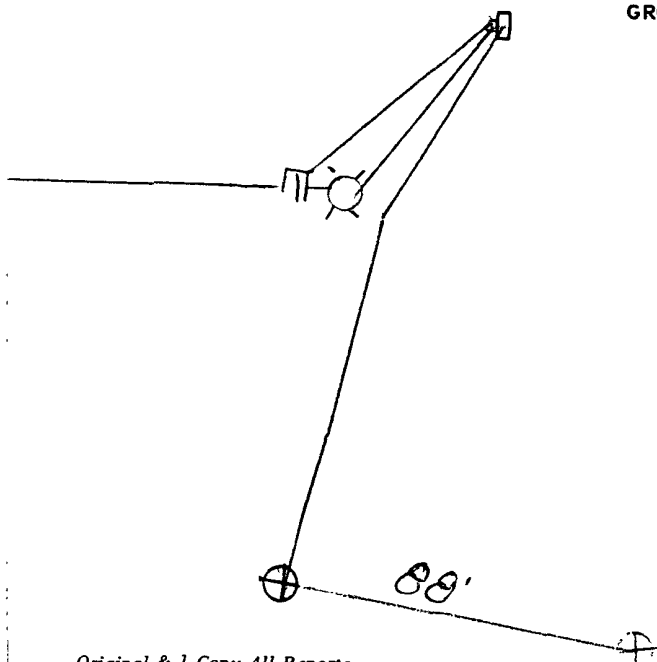

道

DAYLIGHT

EVENING

[illegible]

NO. DC	SIZE	LENG.	NO. DC	SIZE	LENG.	NO. DC	SIZE	LENG.
BIT NO.			BIT NO.			BIT NO.		
SERIAL NO.			SERIAL NO.			SERIAL NO.		
SIZE			SIZE			SIZE		
TYPE			TYPE			TYPE		
MAKE			MAKE			MAKE		
DOWN ON KELLY			DOWN ON KELLY			DOWN ON KELLY		
TOTAL DEPTH			TOTAL DEPTH			TOTAL DEPTH		

[illegible]

Wals Big June 1934.

REMARKS -

REMARKS -	REMARKS -	REMARKS -
7-18-66 finished last date at 1100	World's Drilled to 280 ft with	43 1/2" Drilled to 180 ft
64 hole left Rig at 5:00		
7-19-66 left yard at 6:00 arrived Rig 7:00 Drilled from 180 ft. to 400 ft left Rig at 5:00		
8-66 left yard at 6:00 arrived Rig 7:00 Drilled outside doged finished at 10:30		

Company Supervisor

Handwritten signature: *Handwritten signature*