

38 - 30-039-07229
56 - 30-039-07228

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 32 Twp 28 Rng 5

Name of Well/Wells or Pipeline Serviced SAN JUAN 28-5 UNIT #38, #56

cps 732w

Elevation 6590' Completion Date 4/21/66 Total Depth 295' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 50'

Depths gas encountered: N/A

Type & amount of coke breeze used: 5125 lbs.

Depths anodes placed: 261', 255', 249', 243', 237', 231', 225', 219', 213', 100'


Depths vent pipes placed: 261' OF 3/4" PLASTIC HOSE

Vent pipe perforations: BOTTOM 60'

Remarks: qb #1 FIRST HOLE(180") CAVED.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

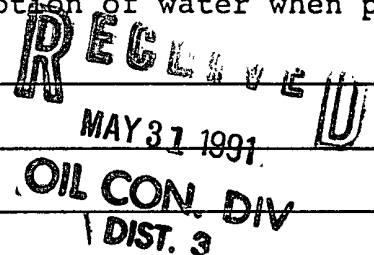

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

4 3/4" #7 = 60' Item #49

Date 4-21-66

Well Name SU 28-5# 38 & SW 28-5# 56			CPS No. 732 W		
Location SW 28-5			Work Order No. 184-53771-50-20		
Anode Hole Depth 295	Total Drilling Rig Time 20 1/2 Hrs	Type & Size Bit Used 7 7/8 - 45407 = 295		No. Sacks Mud Used 1	
No. Sacks Lost Circulation Mat'l Used 0	Anode Depth	#1 261	#2 255	#3 249	#4 243
		#5 237	#6 231		
Total Lbs. Coke Used 5125	Anode Output (Volts)	#1 2.5	#2 3.0	#3 3.7	#4 3.9
		#5 4.0	#6 4.2		
Total Circuit Resistance Volts 11.0	Amps 11.8	Ohms 0.93	No. Ft. Surface Cable Conduit 2633 on Anodes		
			7 225	8 219	9 213
			7 3.6	8 3.6	9 4.0
			10 100	10 4.9	

Drilling Log (Attach Hereto). ☐

Remarks: Static 600' SE No. 38 = .80 600' SW No. 56 = .67
3/4" Plastic Hose to Bottom Anode - Perforated Bottom 60'
10 lbs Chemical to G.B.


Good All Rectifier-30-20- 3 Neg. Ser. 65C 6658

All Construction Completed

Arvels
(Signature)

1137'
2633'
3770' TOTAL #8 WIRE

GROUND BED LAYOUT SKETCH

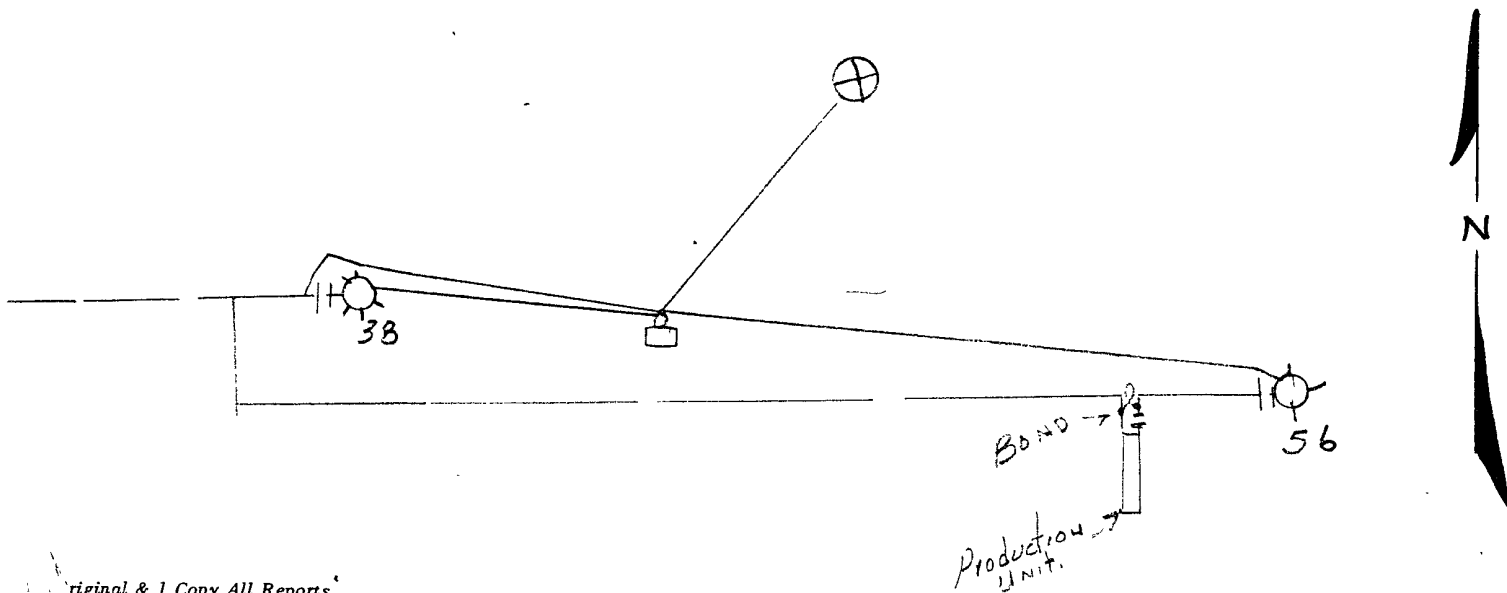

60

DAILY DRILLING REPORT

DATE 5-1-68

DAYLIGHT

11. EVENING

NO. DC	SIZE	LENG.	NO. DC	SIZE	LENG.	NO. DC	SIZE	LENG.
BIT NO.	NO. DC	SIZE	LENG.	BIT NO.	NO. DC	SIZE	LENG.	BIT NO.
SERIAL	STANDS	SERIAL NO.	STANDS	SERIAL NO.	STANDS	SERIAL NO.	STANDS	SERIAL NO.
SIZE	SINGLES	SIZE	SINGLES	SIZE	SINGLES	SIZE	SINGLES	SIZE
TYPE	DOWN ON KELLY	TYPE	DOWN ON KELLY	TYPE	DOWN ON KELLY	TYPE	DOWN ON KELLY	TYPE
MAKE	TOTAL DEPTH	MAKE	TOTAL DEPTH	MAKE	TOTAL DEPTH	MAKE	TOTAL DEPTH	MAKE

[illegible][illegible]

REMARKS -

4-15-66 - Left at 1:30 p.m. for drilled under left side of road
at 60' drilled 80' with 3 1/2" drill bit at 500
4-18-66 - Left at 600 drilled from 80' to 250' left side at 500
4-19-66 - Left at 600 drilled from 260' to 295' but quit come out
out hole also by 800 left side at 200

Company Supervisor

David