

45-30-039-07176

82-30-039-27394

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 6 Twp 27 Rng 5

Name of Well/Wells or Pipeline Serviced SNA JUAN 27-5 UNIT #45, #82

cps 742w

Elevation 6503' Completion Date 9/12/73 Total Depth 440' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 110' - 120'

Depths gas encountered: N/A

Type & amount of coke breeze used: 6800 lbs.

Depths anodes placed: 405', 395', 385', 355', 345', 335', 320', 280', 270', 260', 250', 240'

Depths vent pipes placed: N/A

Vent pipe perforations: 323'

Remarks: gb #2

RECEIVED
MAY 31 1991
OIL CON. DIV
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

109922
Completion Date **9-12-73**

Drilling Log (Attach Hereto). ☐


Well Name S.D. 27-5 #45 & #82		Location SW 6-27-5		CPS No. 742 W	
Type & Size Bit Used 6 3/4		Work Order No. 53710 & 54277			
Anode Hole Depth 440	Total Drilling Rig Time	Total Lbs. Coke Used 6800	Lost Circulation Mat'l Used		No. Sacks Mud Used
Anode Depth					
# 1 405	# 2 395	# 3 385	# 4 355	# 5 345	# 6 335
# 7 320	# 8 280	# 9 270	# 10 260		
Anode Output (Amps)					
# 1 2.9	# 2 3.8	# 3 3.8	# 4 2.9	# 5 2.9	# 6 3.1
# 7 3.2	# 8 2.7	# 9 3.8	# 10 3.7		
Anode Depth					
# 11 250	# 12 240	# 13	# 14	# 15	# 16
# 17	# 18	# 19	# 20		
Anode Output (Amps)					
# 11 4.0	# 12 3.7	# 13	# 14	# 15	# 16
# 17	# 18	# 19	# 20		
Total Circuit Resistance					
Volts 12.2	Amps 12.6	Ohms 0.97	No. 8 C.P. Cable Used		No. 2 C.P. Cable Used

Remarks: **Driller said water 110-120' - water standing at 210**
Vent Perforated 323'
Pump 53 Sacks, Slurry 15, Total 68

Construction Completed

Sorels
(Signature)

GROUND BED LAYOUT SKETCH

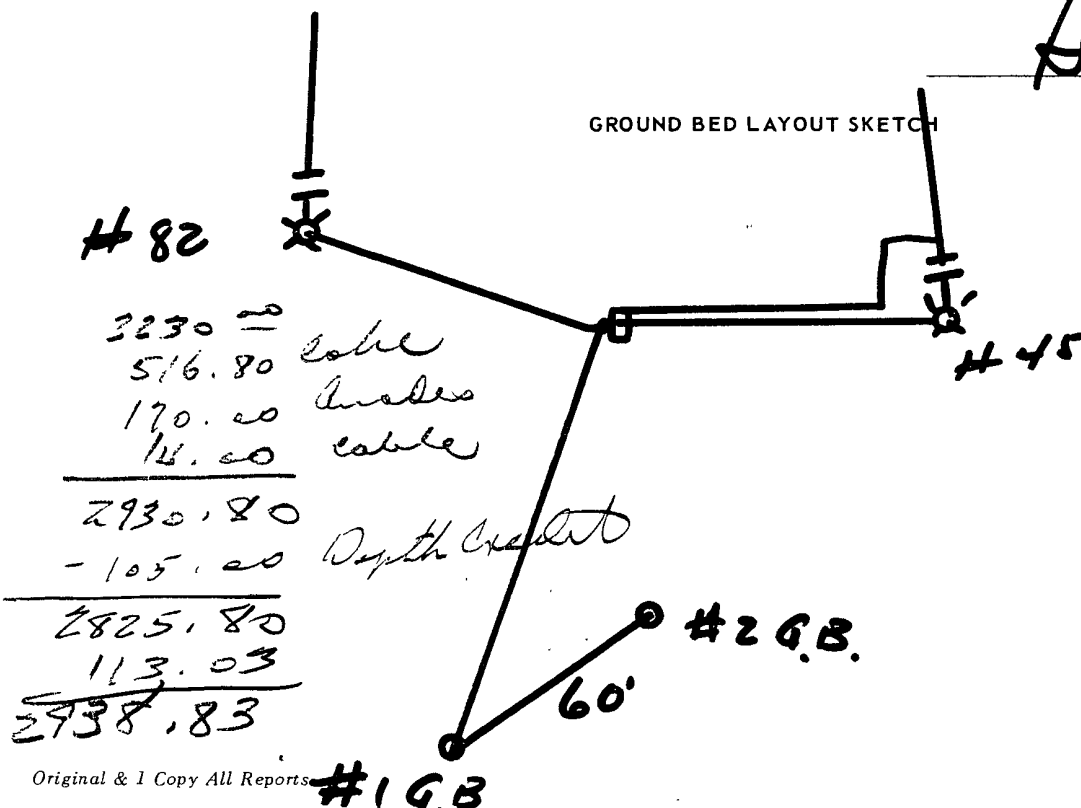

LEASE

CONTRACTOR

None

REPORT NO.

DATE _____

9-12

1973

SIGNED: Toolpusher

Best known

____ Company Supervisor