

1490

1- 30-045-07566
19- 30-045-07555
26- 30-045-24529
54- 30-045-25596

E

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit N Sec. 12 Twp 28 Rng 10

Name of Well/Wells or Pipeline Serviced ZACHERY #1, #19, #26, #54
cps 6346w

Elevation N/A Completion Date 9/16/83 Total Depth 360' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 70'

Depths gas encountered: N/A


Type & amount of coke breeze used: 3000 lbs.

Depths anodes placed: 335', 325', 315', 305', 295', 270', 260', 250', 235', 225'

Depths vent pipes placed: 325'

Vent pipe perforations: N/A

Remarks: (gb #2)

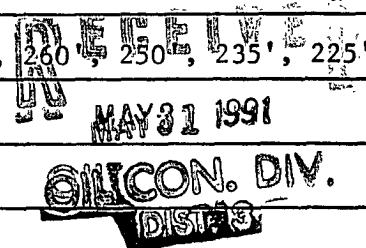

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

CORROSION CONTROL CO.

P. O. BOX 179 - PHONE 334-6361
AZTEC, NEW MEXICO 87410

#19, #2, #54

Drilling Log (Attach Hereto). ☐

6346W

Completion Date

9-16-83

Well Name <i>Grachery 15th Street</i>		Location <i>U.T.P.C.</i>		N 12-28-10	
Type & Size Bit Used				Work Order No.	
Anode Hole Depth <i>360'</i>	Total Drilling Rig Time		Total Lbs. Coke Used <i>3000#</i>	Lost Circulation Mat'l Used	
No. Sacks Mud Used					
Anode Depth	#1 <i>335'</i>	#2 <i>325'</i>	#3 <i>315'</i>	#4 <i>305'</i>	#5 <i>295'</i>
	#6 <i>270'</i>	#7 <i>260'</i>	#8 <i>250'</i>	#9 <i>235'</i>	#10 <i>220'</i>
Anode Output (Amps)	#1 <i>2.5</i>	#2 <i>2.5</i>	#3 <i>2.6</i>	#4 <i>2.1</i>	#5 <i>2.1</i>
	#6 <i>2.2</i>	#7 <i>2.8</i>	#8 <i>3.6</i>	#9 <i>2.9</i>	#10 <i>3.1</i>
Anode Depth	#11 <i>210'</i>	#12 <i>200'</i>	#13 <i>190'</i>	#14 <i>180'</i>	#15 <i>170'</i>
	#16 <i>160'</i>	#17 <i>150'</i>	#18 <i>140'</i>	#19 <i>130'</i>	#20 <i>120'</i>
Anode Output (Amps)	#11 <i>3.3</i>	#12 <i>3.1</i>	#13 <i>3.2</i>	#14 <i>3.9</i>	#15 <i>5.0</i>
	#16 <i>4.3</i>	#17 <i>5.3</i>	#18 <i>4.4</i>	#19 <i>3.9</i>	#20 <i>4.6</i>
Total Circuit Resistance	Volts <i>12.0</i>		Amps <i>16.4</i>	Ohms <i>.73</i>	No. 8 C.P. Cable Used <i>4865'</i>
					No. 2 C.P. Cable Used


Remarks: *WATER WAS AT 70', USED 325' OF VENT PIPE.*

All Construction Completed

Sam

(Signature)

GROUND BED LAYOUT SKETCH

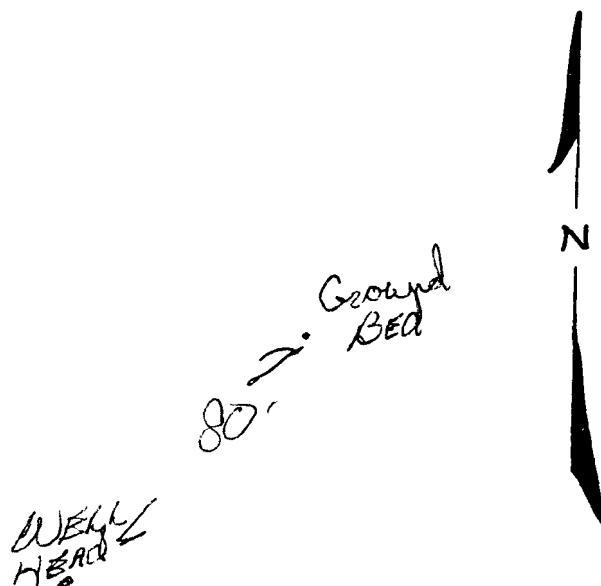

CORROSION CONTROL CO. • 300 West Chaco • Aztec, New Mexico

LOCATION

Union of Texas

DAILY DRILLING REPORT

Sept

19

83

FARM:

WELL NUMBER:

SECTION:

TOWNSHIP:

RANGE:

174chery 15,20,13,33

1

water at 70 - 100

HOLE MADE:

360

DESCRIPTION OF FORMATION

FROM	TO	FORMATION IS	COLOR
0	100	Surface Sand	
100	120	water sand.	
120	160	Bentonite	
160	200	Sandy Shale	

REMARKS:

Driller

Tool Dresser

HOLE MADE:

DESCRIPTION OF FORMATION

FROM	TO	FORMATION IS	COLOR
200	300	Sandy shale and Bentonite	
300	360	Sand.	

REMARKS:

Driller

Tool Dresser

HOLE MADE:

DESCRIPTION OF FORMATION

FROM	TO	FORMATION IS	COLOR

REMARKS:

Driller

Terence Targent

Tool Dresser