

4-USGS, 1-Canfield UNITED STATES
1-F DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN TRIPLICATE*
(Other instructions on re-
verse side)Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

SF-077111

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Blanco Wash Federal

9. WELL NO.

3

10. FIELD AND POOL, OR WILDCAT

Basin Dakota

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

27-28N-9W

NMPM

12. COUNTY OR PARISH

San Juan

13. STATE

N.M.

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)


1. OIL WELL ☐ GAS WELL ☒ OTHER	2. NAME OF OPERATOR Beta Development Co.
3. ADDRESS OF OPERATOR 234 Petr. Club Plaza, Farmington, N. M.	4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.) At surface 840/S 1250/W
14. PERMIT NO.	15. ELEVATIONS (Show whether DF, RT, GR, etc.) 6218' GL

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data			
NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
TEST WATER SHUT-OFF ☐	PULL OR ALTER CASING ☐	WATER SHUT-OFF ☐	REPAIRING WELL ☐
FRACTURE TREAT ☐	MULTIPLE COMPLETE ☐	FRACTURE TREATMENT ☐	ALTERING CASING ☐
SHOOT OR ACIDIZE ☐	ABANDON* ☐	SHOOTING OR ACIDIZING ☐	ABANDONMENT* ☐
REPAIR WELL ☐	CHANGE PLANS ☐	(Other) <u>Set producing casing</u> ☒	
(Other) ☐		(NOTE: Report results of multiple completion on Well Completion or Recompletion Report, and Log-form.)	

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

6-14-65 Log TD 6910'. Circ., ran logs, LDDP & DC.

6-15-65 Ran 219 jts. 6914.82' 4 1/2" 10.5 & 11.6# J-55 ST&C csg. set @ 6910', float @ 6890, DV tools @ 2481 & 4776'. Cemented 1st stage w/175 sx 50-50 Pozmix + 4% gel and 100 sx reg + 2% gel, 1% Halad-9. PD @ 12:10 PM. Cemented 2nd. stage w/250 sx 50-50 Pozmix Class C + 8% gel, 12 1/2# gilsonite/sx and 50 sx reg. class C + 3% calcium chloride. PD @ 1:00 PM. Cemented 3rd stage w/550 sx 50-50 Pozmix Class C + 8% gel and 100 sx 50-50 Pozmix Class C + 6% gel. PD @ 2:00 PM. Set slips, released rig @ 4:00 PM June 15.

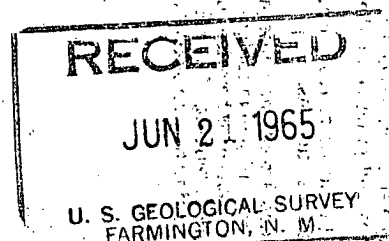

18. I hereby certify that the foregoing is true and correct

Original signed by:
SIGNED JOHN T. HAMPTONTITLE ManagerDATE 6-17-65

(This space for Federal or State office use)

APPROVED BY _____
CONDITIONS OF APPROVAL, IF ANY:

TITLE _____

DATE _____

*See Instructions on Reverse Side