

30-039-07879
30-039-24233

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit K Sec. 7 Twp 30 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #88, #450

cps 154w

Elevation 6386' Completion Date 12/5/88 Total Depth 500' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 250' COULDN'T GET SAMPLE

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 425', 417', 109', 305', 385', 375', 365', 357', 350', 340'

Depths vent pipes placed: 450' OF 1" PVC VENT PIPE

Vent pipe perforations: 220'

Remarks: qb #3

RECEIVED

MAY 31 1991

OIL CON. DIV
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING CATHODIC PROTECTION CONSTRUCTION REPORT DAILY LOG

Comp 12-7-88

Drilling Log (Attach Hereto) ☐

Completion Date 12/5/88

CPS #	Well Name, Line or Plant:	Work Order #	Status:	Ins. Union Check
154 W	S.J. 30-6 "450" 3171A	30-6 #39 (38A) 32A	.63V 600' N	☒ Good ☐ Bad
Location K-7-30-G	Anode Size 2"x60"	Anode Type 2"x60"	Size Bit 6 7/4"	
Depth Drilled 500	Depth Logged 450	Drilling Rig Time	Total Lbs. Coke Used	Lost Circulation Mat'l Used
No Sacks Mud Used				
Anode Depth				
# 1 425	# 2 417	# 3 409	# 4 395	# 5 385
# 6 375	# 7 365	# 8 357	# 9 350	# 10 340
Anode Output (Amps)				
# 1 1.9	# 2 2.7	# 3 2.3	# 4 1.4	# 5 1.5
# 6 2.5	# 7 2.6	# 8 2.2	# 9 2.2	# 10 1.9
Anode Depth				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Anode Output (Amps)				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Total Circuit Resistance		No. 8 C.P. Cable Used		No. 2 C.P. Cable Used
Volts 12.2	Amps 9.7	Ohms 1.3		

Remarks: WATER AT 250', COULD NOT GET WATER SAMPLE. INSTALLED 450' of 1" P.V.C. VENT PIPE, PERFORATED 220'.

C.B. 407400

Rectifier Size: — V — A

Addn'l Depth: —

Depth Credit: —50' 3.50

Extra Cable: 470' .24

Ditch & 1 Cable: 290' .70

~~Ditch & 2 Cable:~~25' Meter Pole: ☒20' Meter Pole: ☒10' Stub Pole: ☒Junction Box: ☒

225.00


4439.80

TAX 222.00

TOTAL 4661.80

All Construction Completed

(Signature)

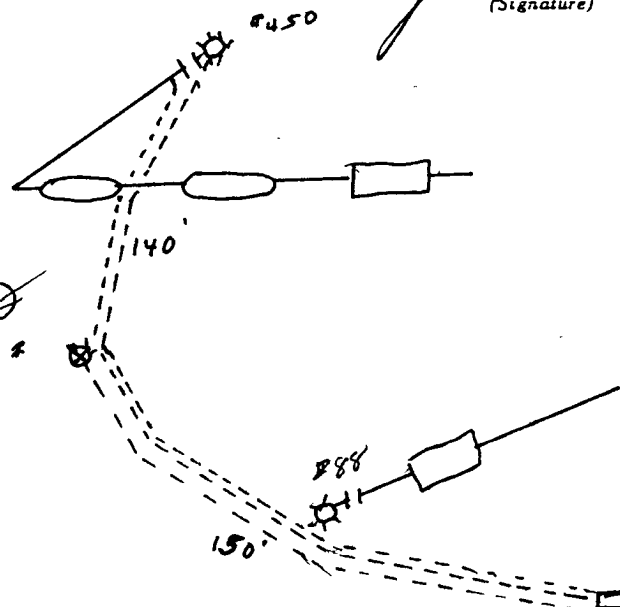

D. Crass DRILLING CO.

Drill No. 3

DRILLER'S WELL LOG

S. P. No. S.J. 30-6 #450 Date 12-5-88
Client Meridian Oil Co. Prospect _____
County Rio Arriba State New Mex.

If hole is a redrill or if moved from original staked position show distance
and direction moved: _____

FROM	TO	FORMATION — COLOR — HARDNESS
0	30	SAND
30	180	Shale
180	210	SANDSTONE
210	235	SANDY SHALE
235	250	SAND ✓
250	260	Shale
260	280	SANDSTONE
280	300	Shale
300	320	SANDSTONE
320	430	Shale
430	500	SANDSTONE

Mud _____ Brn _____ Lime _____

Rock Bit Number _____ Make _____

Remarks: Damp @ 250'

Driller RONNIE BROWN