

30-039-07896
30-039-24177

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 11 Twp 30 Rng 7

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #64, #419

cps 162w

Elevation 6749' Completion Date 11/20/75 Total Depth 535' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 200' INCREASE AT 250'

Depths gas encountered: N/A

Type & amount of coke breeze used: 6000 lbs.

Depths anodes placed: 480', 470', 390', 380', 370', 360', 350', 340', 330', 320'

Depths vent pipes placed: N/A

Vent pipe perforations: 280'

Remarks: Log #3 LOGGING ANODE STOPPED AT 511'

RECEIVED

MAY 31 1991

OIL CON. D

DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Drilling Log (Attach Hereto). ☐

Completion Date *11-20-75*


Well Name SAN JUAN 30-6 #14		Location NE 11-30N-7W		CPS No. 162W	
Type & Size Bit Used 6 3/4"				Work Order No. 184-52183.19-50-	
Anode Hole Depth 535'		Total Drilling Rig Time		Total Lbs. Coke Used 6,000	
Anode Depth		Lost Circulation Mat'l Used		No. Sacks Mud Used	
# 1 480	# 2 470	# 3 390	# 4 390	# 5 370	# 6 360
# 7 350	# 8 340	# 9 330	# 10 320		
Anode Output (Amps)					
# 1 1.8	# 2 1.8	# 3 2.1	# 4 2.6	# 5 2.2	# 6 2.6
# 7 3.0	# 8 2.6	# 9 2.6	# 10 2.2		
Anode Depth					
# 11	# 12	# 13	# 14	# 15	# 16
Anode Output (Amps)					
# 11	# 12	# 13	# 14	# 15	# 16
Total Circuit Resistance				No. 8 C.P. Cable Used	
Volts 11.0	Amps 10.5	Ohms 1.04	4790		No. 2 C.P. Cable Used

Remarks: *Driller said water AT 200' INCREASE AT 250'. VENT HOSE PERFORATED 280' LOGGING ANODE STOPPED AT 511' FILLED HOLE TO LOG WITH WATER FROM NAVAJO DAM (HIGH RESISTANCE WATER)*

All Construction Completed

Edward R. Parker
(Signature)

GROUND BED LAYOUT SKETCH

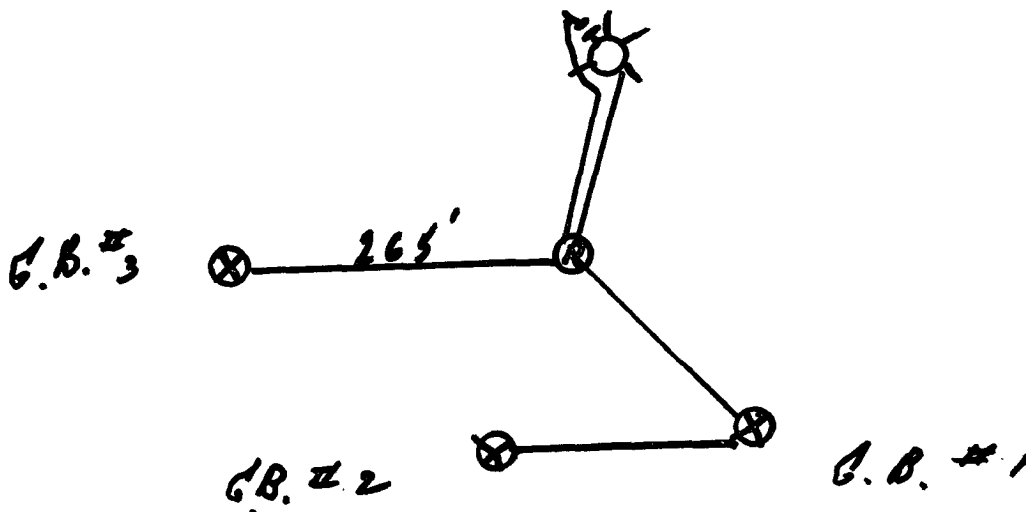

Ph. Office 405/584-6000
Mobile 584-6860
Night 420-3248

Work Order No. 11-1-52183 19-52-52

San. Dec. 30-6 #1000

CUSTOMER <i>W. W. National Gas Co.</i>		SERVICE ADDRESS <i>Box 890</i>		CITY <i>Washington, D.C. 8740</i>	
TEL. NO. <i>1636</i>	REQ. NO.	SERVICEMAN <i>Morgan Sullivan Co.</i>	VEHICLE NO. <i>71</i>	DATE COMPLETED	

INSTRUCTIONS:

[illegible]

Date started _____, 19____
Date completed _____, 19____

TOTAL DEPTH 511

RIG TIME

WATER TRUCK

This well was drilled under my supervision and the report is true to the best of my knowledge.

Name John T. Luchessa

Address

Well driller's license number

Signed

Date _____

Customer's Signature _____

By

162 N

[illegible]

MW	gas/mol
44	CO ₂
44	6.38
34	H ₂ S
34	5.17
28	N ₂
28	4.16
2	H ₂
2	3.38

[illegible]