

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS IN
NORTHWEST NEW MEXICO

OPERATOR: Williams Production Company LOCATION: K 21 32 11 LEASE NUMBER: NM-03189

NAME OF WELL/WELLS OR PIPELINE SERVICED: COX CANYON UNIT #005 MV 30-045-11326
DUALWELL COX CANYON #14 30-045-21490

ELEVATION: 6872' GR COMPLETION DATE: 01/20/76 TOTAL DEPTH: 505 ft. LAND TYPE: FED

CASING: 7-5/8" 26.4# K-55 Set @ N/A ft. Casing is not cemented.

CEMENT PLUG--Top: N/A' Bottom: N/A' Used 0 sx. Class "D" (1.18 cu.ft./sk).

WATER DEPTH: 125' Water zone thickness not available. WATER DESCRIPTION: Fresh


DEPTH OF GAS: N/A'

COKE: 10665 lbs. of Metallurgical coke breeze used.

NUMBER & TYPE OF ANODES: 10CD TOP ANODE @ 160 ft. BOTTOM ANODE @ 500 ft.

VENT PIPE: 1" PVC Set @ 505 ft. Vent pipe perforated from 140 ft. to 505 ft.

REMARKS: _____

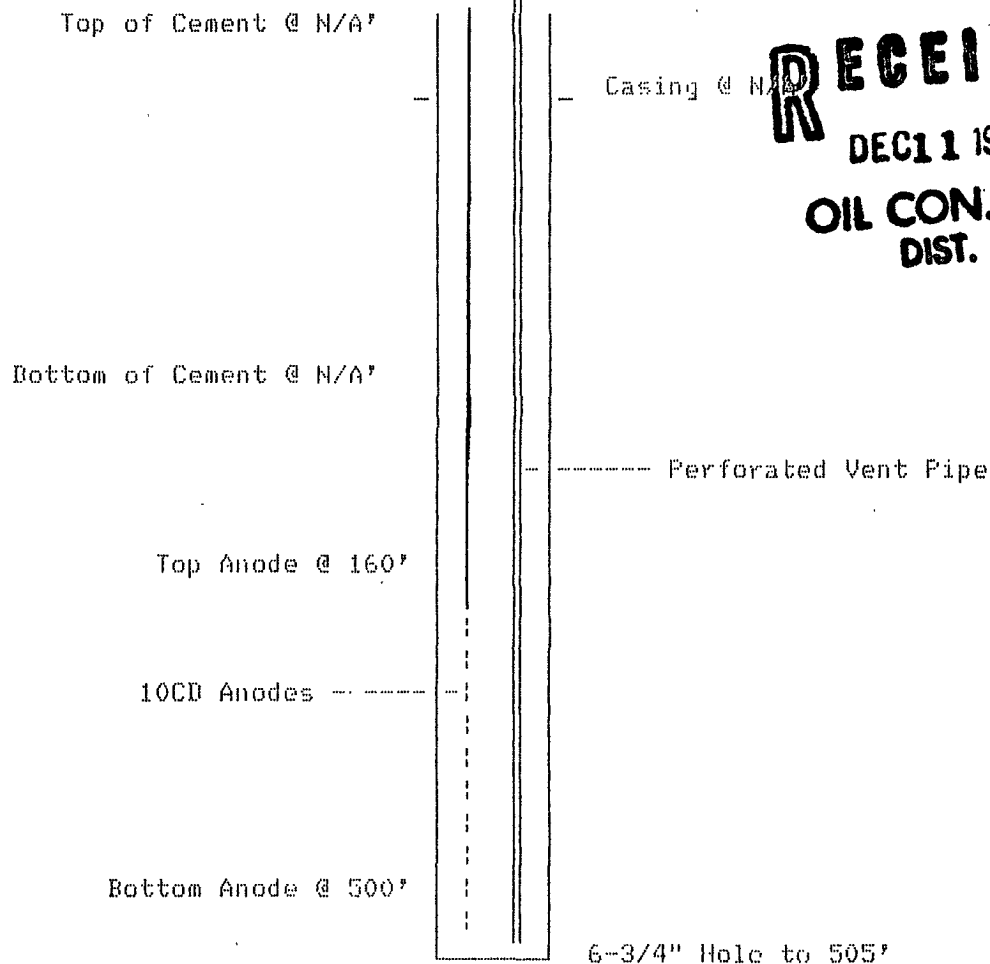

RECEIVED
DEC 11 1991
OIL CON. DIV.
DIST. 3

JOB NO. 60102

DATE: 11-10-75

SURVEY:

BY: BT

TEST LOCATION		300	400	500	
200	6.4	6.7	8.10	3.4	- 3
	7.3	5.3	14.0	5.3	-
	9.6	5.3	20.0	40.0	4.0
	9.3	5.0	14.0	12.0	5.6
	14.0	5.6	30.0	4.7	3.9
225	16.0	9.6	38.0	4.0	- 2
	22.0	15.0	35.0		- 1
	32.0	13.0	27.0		-
	40.0	10.0	18.0		
	51.0	16.0	18.0		
250	39.0	21.0	16.0		
	26.0	24.0	14.0		
	35.0	24.0	14.0		
	23.0	20.0	14.0		
	19.0	18.0	14.0		
275	7.6	18.0	14.0		
10	8.0	16.0	10.0		
	16.0	14.0	4.6	- 5	
	21.0	12.0	4.8		
295	14.0	8.8	4.5	- 4	
775					
300					
310					
320					
410					
485					
495					
500					

NOTES:



GENERAL
CORROSION
SERVICES

14
Cox Canyon 50
SHEET NO.

JOB NO. 60102

DATE: 11-11-75

SURVEY: _____

BY: BT

TEST LOCATION						
<u>150</u>	13.0	355	20.0			
	5.6		25.0			
<u>160</u>	4.7	10	25.0			
	4.9		24.0			
<u>170</u>	5.7	9	18.0			
	7.2		18.0			
	8.8		18.0			
	15.0		17.0			
	14.0		14.0			
<u>195</u>	7.1	8400	12.0			
<u>200</u>	7.7		8.2	2	405	
<u>205</u>	7.0	7	9.5			
	9.5		21.0			
	10.0		17.0			
	14.0		17.0			
	15.0		33.0			
	18.0		38.0			
	23.0		31.0			
	33.0		27.0			
	40.0	450	20.0			
<u>250</u>	46.0		18.0			
	35.0		18.0			
	25.0		15.0			
	35.0		14.0			
	23.0		17.0			
	19.0		17.0			
<u>280</u>	7.3	6	18.0			
	7.3		13.0			
	14.0		4.8			
	23.0	500	5.1	0	500	
<u>300</u>	14.0		4.9			
<u>305</u>	7.5	5	7.9			
	5.4					
<u>315</u>	5.2	4				
	5.2					
<u>335</u>	5.4	3				
	7.7					
	18.0					
	13.0					
	13.0	550				
<u>350</u>	13.0					

NOTES: _____

6752 C.R.

5900 # 6002