

32-30-039-07066
179-30-039-07076

CPS 683

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator Union Oil Company of California Location: Unit Sec. 16 Twp 27N Rng 6W

Name of Well/Wells or Pipeline Serviced Rincon Unit 32MV, and Rincon 179DK

Elevation 6,000 Completion Date 12/7/1965 Total Depth 380' Land Type* S

Casing, Sizes, Types & Depths no information

If Casing is cemented, show amounts & types used na

If Cement or Bentonite Plugs have been placed, show depths & amounts used
na

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. na

Depths gas encountered: Not available

Type & amount of coke breeze used: Type unknown - 4050 lbs

Depths anodes placed: 245'

Depths vent pipes placed: 255'

Vent pipe perforations: At each anode from 187' to 245'

Remarks: El Paso Natural Gas Co. was operator at the time this ground bed was
installed. Drilling, Logs & water type unavailable. First groundbed installed.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

RECEIVED
MAY 03 1990
OIL CON. DIV.
DIST. 3

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Items

Date 12-7-65

Well Name Rincon #32 & Rincon #179				CPS No. 683 W			
Location NE 16-27-6				Work Order No. 184-52697-50-20			
Anode Hole Depth 380	Total Drilling Rig Time 27 1/2	Type & Size Bit Used AJ 702 = 150'		No. Sacks Mud Used 0			
No. Sacks Lost Circulation Mat'l Used 0	Anode Depth 7,199'	#1 245	#2 239	#3 223	#4 217	#5 211	#6 205
Total Lbs. Coke Used 4050	Anode Output (Volts)	#1 7.3	#2 3.8	#3 3.7	#4 5.2	#5 4.5	#6 3.4
Total Circuit Resistance Volts 12.3	Amps 12.5	Ohms 0.98	No. Ft. Surface Cable Conduit 316				


Drilling Log (Attach Hereto). ☐

Remarks: **R's 600'S #32 = .76 R's 600W #179 = .70**

Install 30V 20A Rectifier (2 NEG.) Good All Ser. # 6506687

3/4" Hose at Bottom & oppsite each Anode at 245' = 255' Hose Perforated 4 lbs Chemical to GB

8 Anodes = 1.1 m

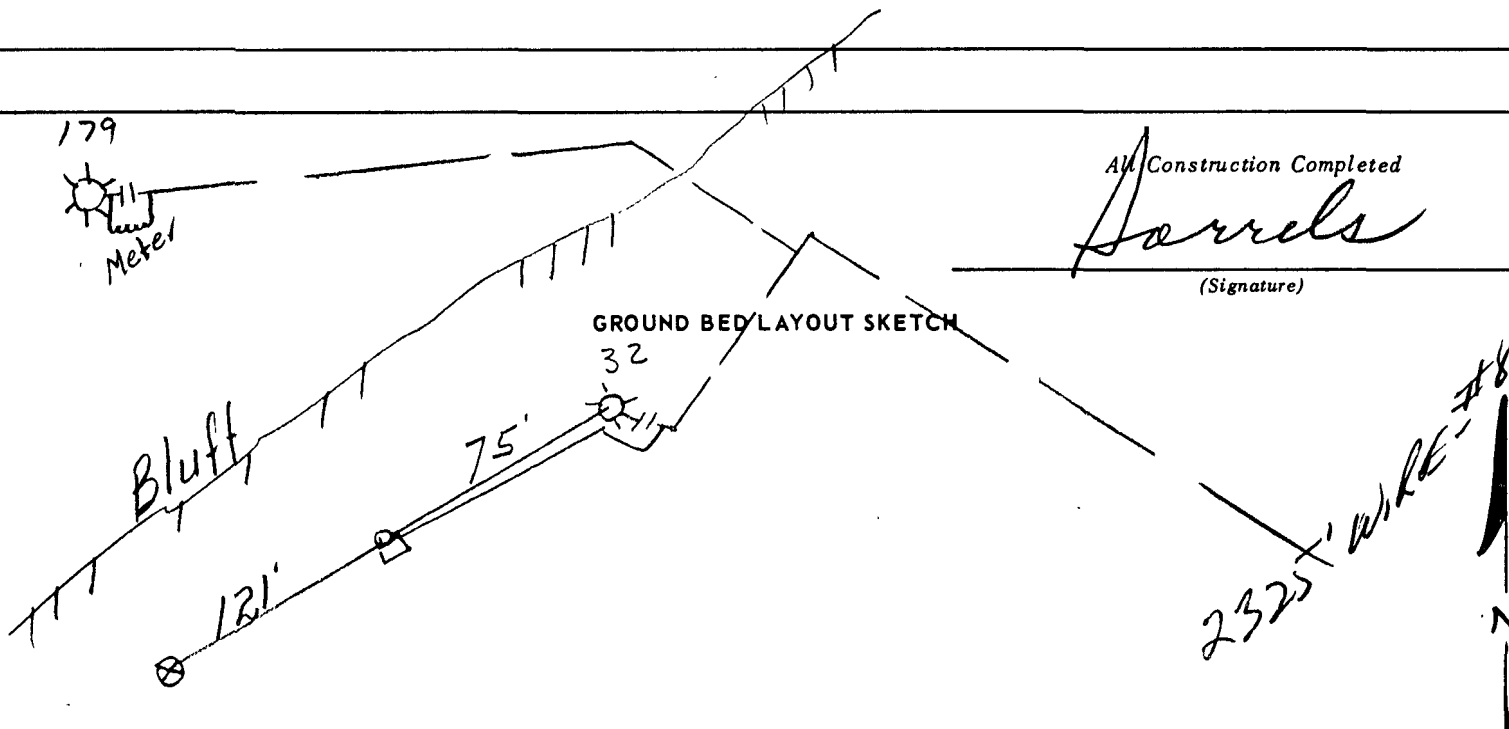

All Construction Completed

Barrels

(Signature)

#5 #179

METER BOX
FLO-LINE RETURN



CATHODIC PROTECTION

EL PASO NATURAL GAS COMPANY

RINCON #32 E#179 CPS-683-W

SCALE NONE

DATE 5-20-65

No. 5

DRAWN BY

JEL

CHECKED BY

NE16-27-6