

98-30-039-07733
421 30-039-2421

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit G Sec. 34 Twp 30 Rng 7

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #98. #421

cps286w

Elevation 6313' Completion Date 12/19/88 Total Depth 380' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 45', 190' COULD NOT GET SAMPLE

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 330', 320', 300', 275', 265', 255', 245', 235', 220', 210'

Depths vent pipes placed: 375' of 1" PVC VENT PIPE

Vent pipe perforations: 180'

Remarks: gb #3

RECEIVED

MAY 31 1991

OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Drilling Log (Attach Hereto) ☐

Comp 12-21-88
Completion Date 12/19/88

CPS #	Well Name Line or Plant	Work Order #	State	Ins Union Check
286W	S.J. 30-6 #421 30-6 #98	3117A 69825	69V 600' W	☒ Good ☐ Bad
Location	Anode Size	Anode Type	Size Bit	
G-34-30-7	2" X 60'	Durion	6 3/4"	
Depth Drilled	Depth Logged	Drilling Rig Time	Total Lbs. Coke Used	Lost Circulation Mat'l Used
300'	375'			
Anode Depth				
= 1 330	= 2 320	= 3 300	= 4 275	= 5 265
= 6 255	= 7 245	= 8 235	= 9 220	= 10 210
Anode Output (Amps)				
= 1 2.3	= 2 1.9	= 3 1.9	= 4 2.5	= 5 2.7
= 6 3.9	= 7 3.8	= 8 2.3	= 9 2.2	= 10 2.7
Anode Depth				
= 11	= 12	= 13	= 14	= 15
= 16	= 17	= 18	= 19	= 20
Anode Output (Amps)				
= 11	= 12	= 13	= 14	= 15
= 16	= 17	= 18	= 19	= 20
Total Circuit Resistance			No. 8 C.P. Cable Used	No. 2 C.P. Cable Used
Volts 11.6	Amps 12.8	Ohms .9		

Remarks: WATER AT 45' & 190', COULD NOT GET WATER SAMPLE. INSTALLED 325' of 1" P.V.C. VENT PIPE, PERFORATED 180'.

1005377

555-5304-001-00-9


G.B. 4074.00
Rectifier Size: 40V 16A 669.00
Addn'l Depth: _____
Depth Credit: -125 3.50 -437.50 ✓
Extra Cable: 280' .24 67.20 ✓
Ditch & 1 Cable: 370' .70 259.00 ✓

All Construction Completed

jc Stoltz
(Signature)

25' Meter Pole: 0
20' Meter Pole: 0
10' Stub Pole: 0
Junction Box: 1

225.00 ✓
4856.70 ✓
TAX 242.84
TOTAL 5099.54 OK 93

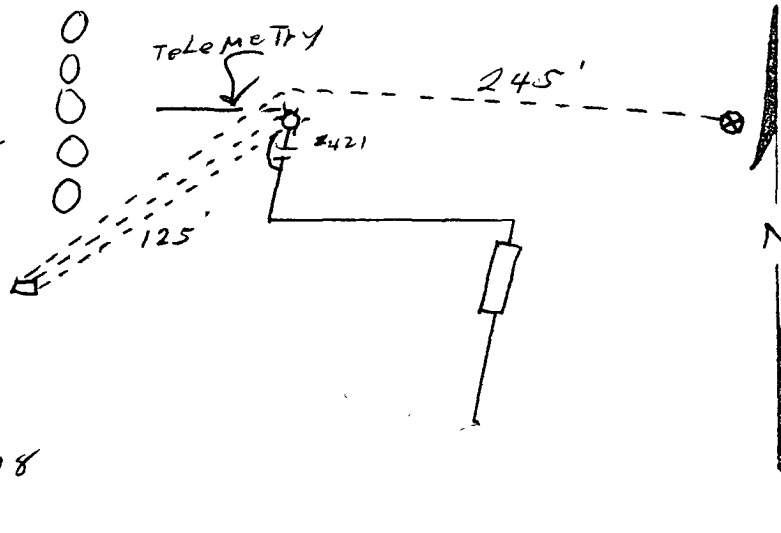

198

DRILLING CO.

Drill No. 10

DRILLER'S WELL LOG

S. P. No. ST 30-1 421 Date _____

Client _____ Prospect _____

County _____ State _____

If hole is a redrill or if moved from original staked position show distance and direction moved: _____

FROM	TO	FORMATION — COLOR — HARDNESS
0	5	Sandy clay
5	20	Sandy loam
20	190	Shale
190	210	Dense sand
210	310	Shale
310	330	Dense sand
330	360	Shale

Mud _____ Bron _____ Lime _____

Rock Bit Number _____ Make _____

Remarks: Dense sand 45' 190'
to 316'

Driller Harvey