

30.039-07887
30.039-24232

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit H Sec. 7 Twp 30 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #32, #451

cps 164w

Elevation 6298' Completion Date 12/5/88 Total Depth 470' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 310' COULD NOT GET SAMPLE

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 345', 335', 320', 280', 270', 210', 200', 175', 165', 155'

Depths vent pipes placed: 450' OF 1" PVC VENT PIPE

Vent pipe perforations: 360'

Remarks: gb #3

RECEIVED

MAY 31 1991

OIL CON. DIV.

DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Comp'd 12-7-88

Drilling Log (Attach Hereto) ☐

Completion Date 12/5/88

CPS #		Well Name, Line or Plant:		Work Order #		Status:		Ins. Union Check:	
164 W		S.J. 30-6 #451 30-6 #92		3182A		✓		☒ Good ☐ Bad	
Location H-7-30-6		Anode Size: 2" X 60"		Anode Type: DURION		Size Bit: 6 3/4"			
Depth Drilled 470'		Depth Logged 450'		Drilling Rig Time		Total Lbs. Coke Used		Lost Circulation Mat'l Used	
Anode Depth									
# 1 345	# 2 335	# 3 320	# 4 280	# 5 270	# 6 210	# 7 200	# 8 175	# 9 165	# 10 155
Anode Output (Amps)									
# 1 2.6	# 2 2.7	# 3 2.6	# 4 2.9	# 5 2.7	# 6 2.8	# 7 3.6	# 8 2.2	# 9 2.6	# 10 2.6
Anode Depth									
# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20
Anode Output (Amps)									
# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20
Total Circuit Resistance						No. 8 C.P. Cable Used		No. 2 C.P. Cable Used	
Volts 11.5		Amps 13.4		Ohms .86					

Remarks: OLD G.B. Log. SAID WATER AT 100', HIT LOTS of WATER AT 310'
 INSTALLED 450' of 1" P.V.C. VENT pipe, PERFORATED 360'.
 COULD NOT GET WATER SAMPLE

meter 45650736

alt 275-B-B-010100

G.B. 4074.00


Rectifier Size: — V — A
 Addn'l Depth: —
 Depth Credit: — 50' 3.50 — 175.00
 Extra Cable: 310' .24 74.40
 Ditch & 1 Cable: 210' .70 147.00
~~Ditch & 2 Cable:~~
 25' Meter Pole: —
 20' Meter Pole: —
 10' Stub Pole: —
 Junction Box: — 225.00

\$ 4345.40
 TAX 217.27

TOTAL \$ 4562.67

All Construction Completed

JA Stott
 (Signature)

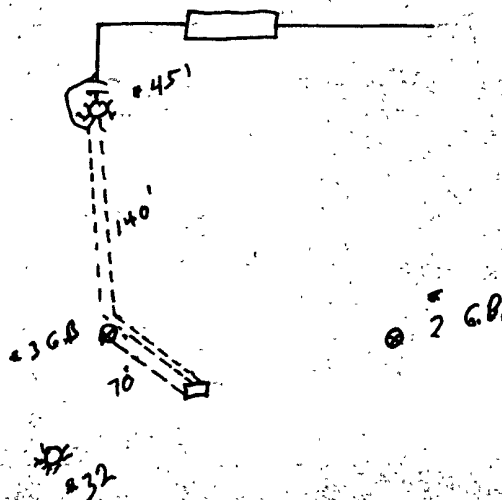

DRILLING CO.

Drill No. A-10

DRILLER'S WELL LOG

S. P. No. 1 Date _____

Client _____ Prospect ST 36-6

County _____ State 45-1

If hole is a redrill or if moved from original staked position show distance and direction moved: _____

FROM	TO	FORMATION - COLOR - HARDNESS
0	10	Sandy clay & shells
10	30	Sandstone
30	50	Brassy sand
50	90	White sand
20	310	Red sand & shale at the
310	340	Water sand
340	470	Blue sand & shells

Mud _____ Brn _____ Lime _____

Rock Bit Number _____ Mate _____

Remarks: Water 310

Driller Chang