

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS IN
NORTHWEST NEW MEXICO

OPERATOR: Williams Production Company LOCATION: K 21 32 11 LEASE NUMBER: NM-03189

NAME OF WELL/WELLS OR PIPELINE SERVICED: COX CANYON UNIT #005 MV 30-045-11326
DUALWELL COX CANYON #14 30-045-21490

ELEVATION: 6872' GR COMPLETION DATE: 01/20/76 TOTAL DEPTH: 505 ft. LAND TYPE: FED

CASING: 7-5/8" 26.4# K-55 Set @ N/A ft. Casing is not cemented.

CEMENT PLUG---Top: N/A' Bottom: N/A' Used 0 sx. Class "B" (1.18 cu.ft./sk).

WATER DEPTH: 125' Water zone thickness not available. WATER DESCRIPTION: Fresh


DEPTH OF GAS: N/A'

COKE: 10665 lbs. of Metallurgical coke breeze used.

NUMBER & TYPE OF ANODES: 10CD TOP ANODE @ 160 ft. BOTTOM ANODE @ 500 ft.

VENT PIPE: 1" PVC Set @ 505 ft. Vent pipe perforated from 140 ft. to 505 ft.

REMARKS:

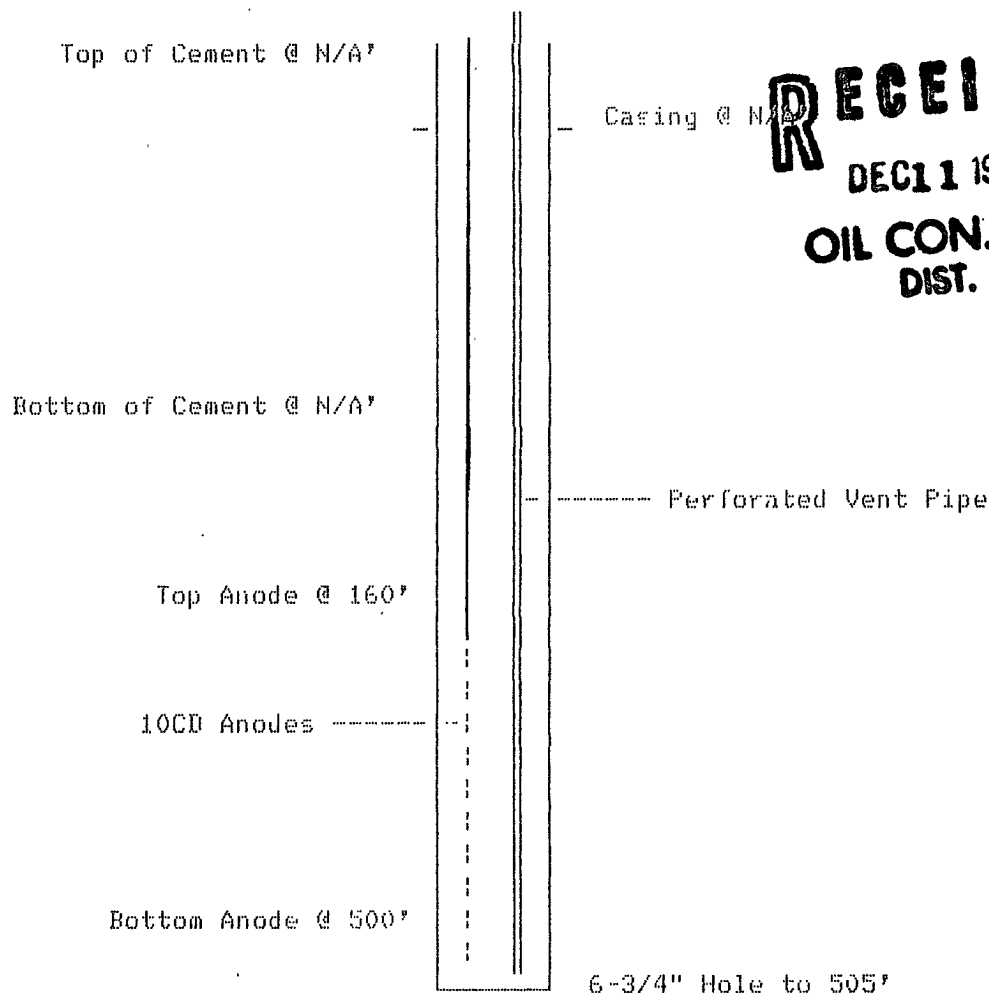

RECEIVED
DEC 11 1991.
OIL CON. DIV.
DIST. 3

JOB NO. 60102

DATE: 11-10-75

SURVEY:

BY: BT

TEST LOCATION		300	400	500	
200	6.4	6.7	2.10	3.4	- 3
	7.3	5.3	14.0	5.3	
	9.6	5.3	20.0	40.0	4.0
	9.3	5.0	14.0	12.0	5.6
	14.0	5.6	30.0	4.7	3.9
225	16.0	9.6	38.0	4.0	- 2
	22.0	15.0	35.0		- 1
	32.0	13.0	27.0		-
	40.0	10.0	18.0		
	51.0	16.0	18.0		
250	39.0	21.0	16.0		
	26.0	24.0	14.0		
	35.0	24.0	14.0		
	23.0	20.0	14.0		
	19.0	18.0	14.0		
275	7.6	18.0	14.0		
10	8.0	16.0	10.0		
	16.0	14.0	4.6	- 5	
	21.0	12.0	4.8		
295	14.0	8.8	4.5	- 4	
275					
300					
310					
320					
410					
485					
495					
500					

NOTES:



GENERAL
CORROSION
SERVICES

Cox Canyon 50 #14
SHEET NO.

JOB NO. 60102

DATE: 11-11-75

SURVEY: _____

BY: BT

TEST LOCATION						
	150	13.0	355	20.0		
		5.6		25.0		
	160	4.7	10	25.0		
		4.9		24.0		
	170	5.7	9	18.0		
		7.2		18.0		
		8.8		18.0		
		15.0		17.0		
		14.0		14.0		
	195	7.1	8400	12.0		
	200	7.7		8.2	2	405
	205	7.0	7	9.5		
		9.5		21.0		
		10.0		17.0		
		14.0		17.0		
		15.0		33.0		
		18.0		38.0		
		23.0		31.0		
		33.0		27.0		
		40.0	450	20.0		1
	250	46.0		18.0		
		35.0		18.0		
		25.0		15.0		
		35.0		14.0		
		23.0		17.0		
		19.0		17.0		
	280	7.3	6	18.0		
		7.3		13.0		
		14.0		4.8		
		23.0	500	5.1	①	500
	300	11.0		4.9		
	305	7.5	5	7.9		
		5.4				
	315	5.2	4			
		5.2				
	335	5.4	3			
		7.7				
		18.0				
		13.0				
		13.0	550			
	350	13.0				

NOTES: _____

6752 C.R.

5900 # 1000