

99 - 30-039-06921

165 - 30-039-06911

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator Union Oil Company of California Location: Unit Sec. 27 Twp 27N Rng 6W

Name of Well/Wells or Pipeline Serviced Rincon #99 PC/MV Rincon #165 DK

Elevation 6528' Completion Date 11/29/65 Total Depth 360' Land Type* F

Casing, Sizes, Types & Depths None

If Casing is cemented, show amounts & types used None

If Cement or Bentonite Plugs have been placed, show depths & amounts used
None

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. NA

Depths gas encountered: NA

Type & amount of coke breeze used: type unknown 5400 lbs

Depths anodes placed: 263 to 305'

Depths vent pipes placed: ?

Vent pipe perforations: ?

Remarks: El Paso Natural Gas was the operator at the time this ground bed was installed.
First ground be installed at this location.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

RECEIVED
MAY 09 1990
OIL CON. DIV.
DIST. 3

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Date 11/29/65

Well Name <u>RINCON #99 RINCON #165</u>			CPS No. <u>704W</u>		
Location <u>NF 27-27-6</u>			Work Order No. <u>184-53158-50-20</u> <u>184-54243-50-20</u>		
Anode Hole Depth <u>360</u>	Total Drilling Rig Time <u>24 Hrs</u>	Type & Size Bit Used <u>2 1/2" ROCK BIT #U900 (240)</u> <u>2 1/2" ROCK BIT 15168 (130)</u>	No. Sacks Mud Used		
No. Sacks Lost Circulation Mat'l Used <u>0</u>	Anode Depth <u>#1 365'</u> <u>#2 297'</u>	<u>#8-163'</u> <u>#9 135'</u>	<u>#3 285'</u>	<u>#4 278'</u>	<u>#5 272'</u> <u>#6 263'</u>
Total Lbs. Coke Used <u>5400 lbs</u>	Anode Output (Volts) <u>#1 2.6</u> <u>#2 2.1</u>	<u>#1 3.9</u> <u>#2 2.1</u>	<u>#3 4.1</u> <u>#3 2.4</u>	<u>#4 2.4</u>	<u>#5 2.6</u> <u>#6 2.4</u>
Total Circuit Resistance Volts <u>12.0</u> Amps <u>10.4</u> Ohms <u>1.15</u>			No. Ft. Surface Cable Conduit <u>1138' Surface #8</u> <u>(3435 #8) TOTAL</u>		


Drilling Log (Attach Hereto). ☐

Remarks: STATICS RINCON #99 = .76 RINCON #165 .74
Installed 30 V. 20 A. 3 Neg. Hood All Rectifier
SERIAL # 65C6669
2nd PHOSPHATE
Anodes Settled - Spliced 5 Anodes
Future Ground Bed trouble could result from spliced cable
on positive leads just under surface.

All Construction Completed

Phelps
(Signature)

GROUND BED LAYOUT SKETCH

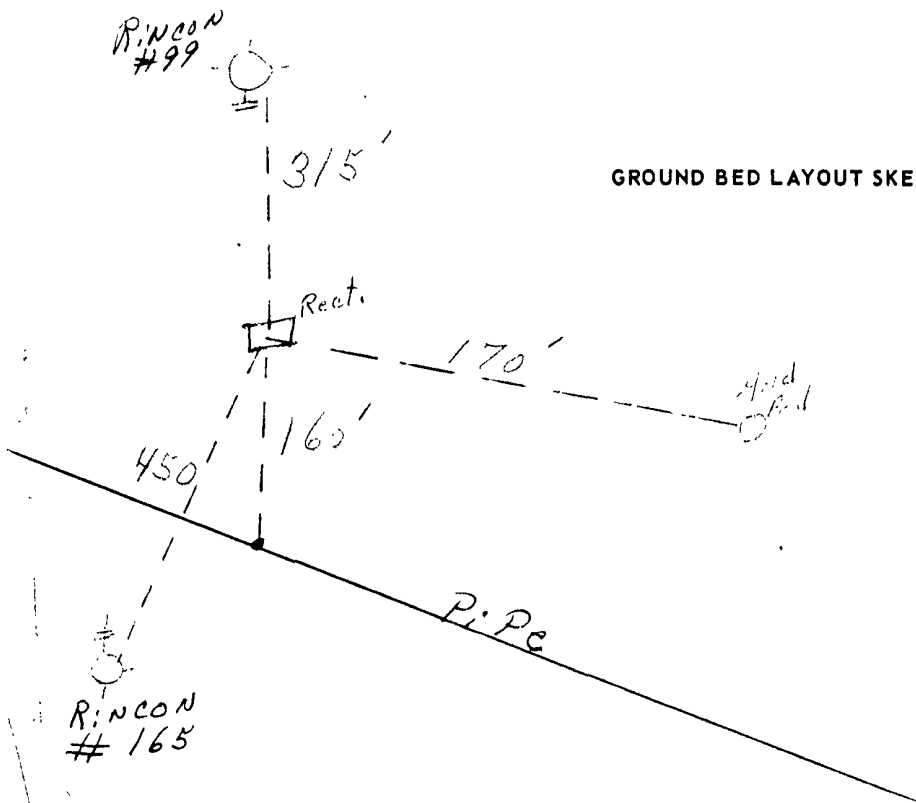

RINCON
#165

704 W

DAILY DRILLING REPORT

[illegible]

SIGNED: Toolpusher

Company Supervisor _____