

114-30-039-06972
170-30-039-06945

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator Union Oil Company of California Location: Unit Sec. 20 Twp 27N Rng 6W

Name of Well/Wells or Pipeline Serviced Rincon 114 PC, Rincon #170 DK and
Rincon #8 MV

Elevation 6513' Completion Date 11/9/1965 Total Depth 425' Land Type* F

Casing, Sizes, Types & Depths None

If Casing is cemented, show amounts & types used None

If Cement or Bentonite Plugs have been placed, show depths & amounts used
None

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. NA

Depths gas encountered: NA

Type & amount of coke breeze used: 6120 lbs

Depths anodes placed: 168' - 382'

Depths vent pipes placed: 178'

Vent pipe perforations: ?

Remarks: El Paso Natural Gas was operator when this ground bed was installed

First ground bed installed.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

RECEIVED
MAY 09 1990
OIL CON. DIV.
DIST. 3

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

13

Date 11-10-65

Well Name Rincon #114, #8 & #170			CPS No. 691W		
Location SW 20-27-6			Work Order No. 53452 184 } 50-20 20046 50241		
Anode Hole Depth 425	Total Drilling Rig Time 30 Hrs	Type & Size Bit Used 93216-115 778-77467-310		No. Sacks Mud Used 0	
No. Sacks Lost Circulation Mat'l Used 1	Anode Depth #1 346 #2 382	#3 340	#4 364	#5 358	#6 352
Total Lbs. Coke Used 6120	Anode Output (Volts) #1 2.2 #2 2.2	#3 2.0	#4 2.8	#5 3.5	#6 4.4
Total Circuit Resistance Volts 11.8	Amps 11.5	Ohms 1.02Ω	No. Ft. Surface Cable Conduit 690'		

Drilling Log (Attach Hereto). ☐

Remarks: **45 V 30 A (2 NEG) Good All Rectifier Ser. # 65C6647**
3/4" Plastic Hose to #12 Anode = 178'
4/lbs Chemical to Gnd. Bed.


12-28-65 - R⁹/s Rincon #170, 600' W = 80' Note - UNIT IN NE 19-27-6
Static. # 8 600' N = 78' Has Been in operation
114 600' E = 79' SINCE 12-9-65
12% in Red
is original

4515 #8 WIRE

All Construction Completed

Barrels
(Signature)

GROUND BED LAYOUT SKETCH

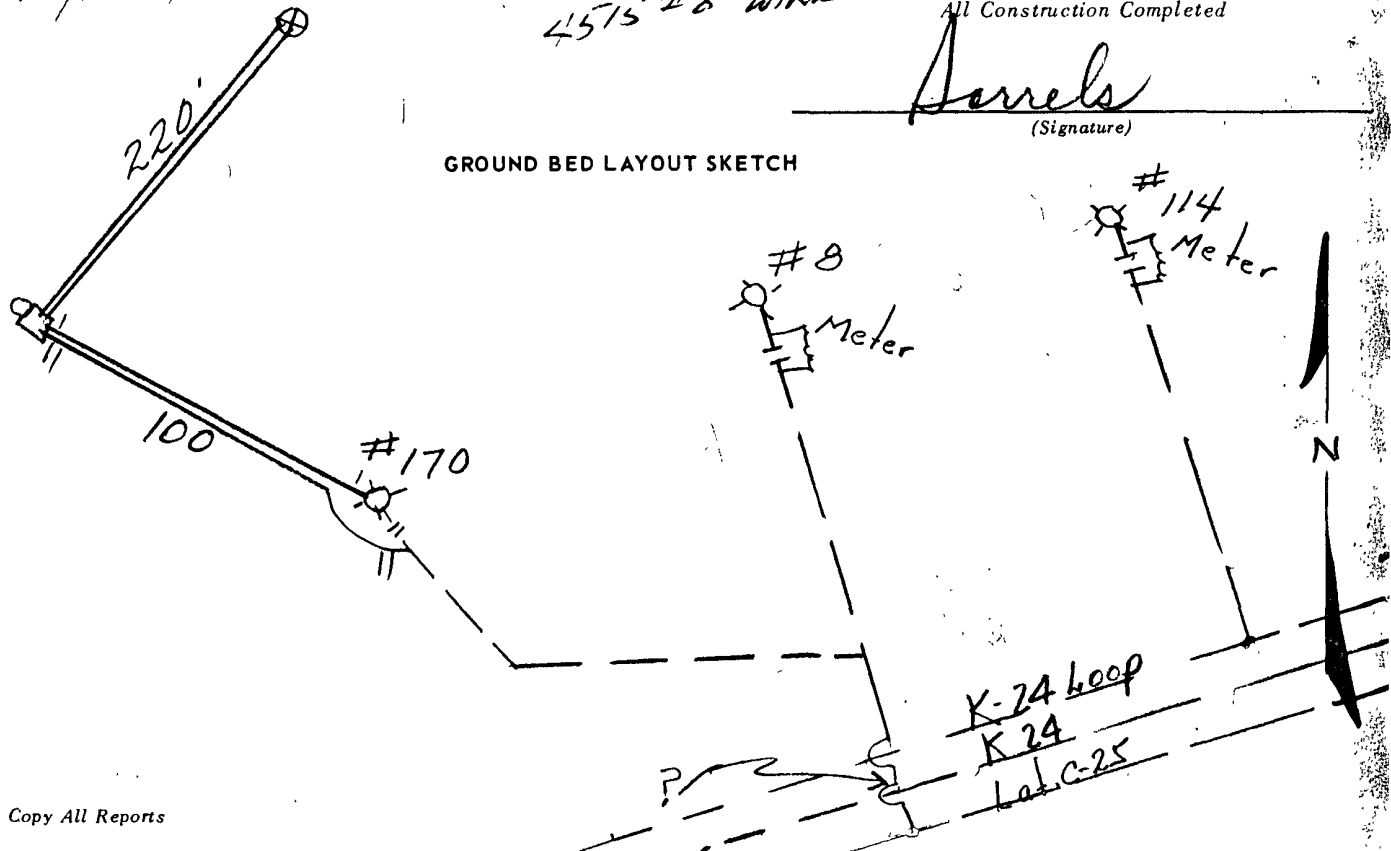

EL PASO NATURAL GAS COMPANY
DRILLING DEPARTMENT

DAILY DRILLING REPORT

C.R. 691W

LEASE CONTRACTOR RIG NO. REPORT NO. DATE

MORNING DAYLIGHT EVENING

Driller										Total Men In Crew										Driller										Total Men In Crew									
FROM		TO		FORMATION		WT-BIT		R.P.M.		FROM		TO		FORMATION		WT-BIT		R.P.M.		FROM		TO		FORMATION		WT-BIT		R.P.M.											
0		30		Sand						165		185		Sandstone						380		425		Sandy shale															
30		65		Sandstone						185		250		Sandy shale																									
65		115		Sandy shale						250		330		Sandy shale																									
115		165		Sandy shale						330		380		Shale																									
BIT NO.				NO. DC		SIZE		LENG.		BIT NO.				NO. DC		SIZE		LENG.		BIT NO.				NO. DC		SIZE		LENG.											
SERIAL NO. 77467				3100S						SERIAL NO. 93216				Perm sandstone		425																							
SIZE 7 7/8				SINGLES						SIZE 7 7/8				SINGLES																									
TYPE K tip				DOWN ON KELLY						TYPE K tip				DOWN ON KELLY																									
MAKE				TOTAL DEPTH						MAKE				TOTAL DEPTH																									
MUD RECORD				MUD, ADDITIVES USED AND RECEIVED						MUD RECORD				MUD, ADDITIVES USED AND RECEIVED																									
Time		WT.		VIS.						Time		WT.		VIS.																									
FROM		TO		TIME BREAKDOWN						FROM		TO		TIME BREAKDOWN																									
		1 back HULLS																																					