

30-039-07818  
30-039-24350

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS  
NORTHWESTERN NEW MEXICO  
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 22 Twp 30 Rng 7

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #72, #466  
cps 147w

Elevation 6298' Completion Date 7/22/66 Total Depth 360' Land Type\* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used  
N/A

Depths & thickness of water zones with description of water when possible:  
Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A


Type & amount of coke breeze used: 7500 lbs.

Depths anodes placed: 305', 299', 293', 287', 281', 263'

Depths vent pipes placed: 305' OF 3/4" PLASTIC HOSE

Vent pipe perforations: 90'

Remarks: gb#2

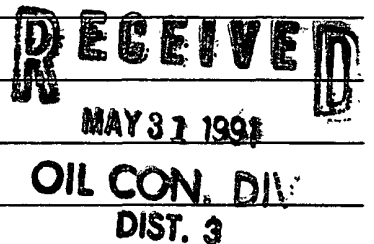

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

\*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.  
If Federal or Indian, add Lease Number.

WELL CASING  
CATHODIC PROTECTION CONSTRUCTION REPORT  
DAILY LOG

Date 7-22-66

240' #11 Drag

|                                                        |                                           |                                                     |                                          |                                |                |
|--------------------------------------------------------|-------------------------------------------|-----------------------------------------------------|------------------------------------------|--------------------------------|----------------|
| Well Name<br><u>30-6 No. 72 (Formerly MCE/Vain #1)</u> |                                           |                                                     | CPS No.<br><u>147 W</u>                  |                                |                |
| Location<br><u>NE 22-30-7</u>                          |                                           |                                                     | Work Order No.<br><u>184-52220-50-20</u> |                                |                |
| Anode Hole Depth<br><u>360</u>                         | Total Drilling Rig Time<br><u>31 Hrs.</u> | Type & Size Bit Used<br><u>7 7/8 - 22319 = 360'</u> |                                          | No. Sacks Mud Used<br><u>2</u> |                |
| No. Sacks Lost Circulation Mat'l Used<br><u>1</u>      | Anode Depth                               |                                                     |                                          |                                |                |
|                                                        | # 1 <u>305</u>                            | # 2 <u>299</u>                                      | # 3 <u>293</u>                           | # 4 <u>287</u>                 | # 5 <u>281</u> |
| Total Lbs. Coke Used<br><u>7500</u>                    | Anode Output (Volts)                      |                                                     |                                          |                                |                |
|                                                        | # 1 <u>3.1</u>                            | # 2 <u>3.3</u>                                      | # 3 <u>3.3</u>                           | # 4 <u>3.5</u>                 | # 5 <u>3.5</u> |
| Total Circuit Resistance                               | No. Ft. Surface Cable Conduit             |                                                     |                                          |                                |                |
| Volts <u>11.2</u>                                      | Amps <u>7.8</u>                           | Ohms <u>1.43</u>                                    | <u>140' surface 2556 Anodes = 2696</u>   |                                |                |

Drilling Log (Attach Hereto). ☐

Remarks: 3/4" Plastic Hose to No. 1 Anode -


Perforations For 90' -

15' lbs Chemical circulated thru. G.B.

All Construction Completed

[Signature]  
(Signature)

GROUND BED LAYOUT SKETCH

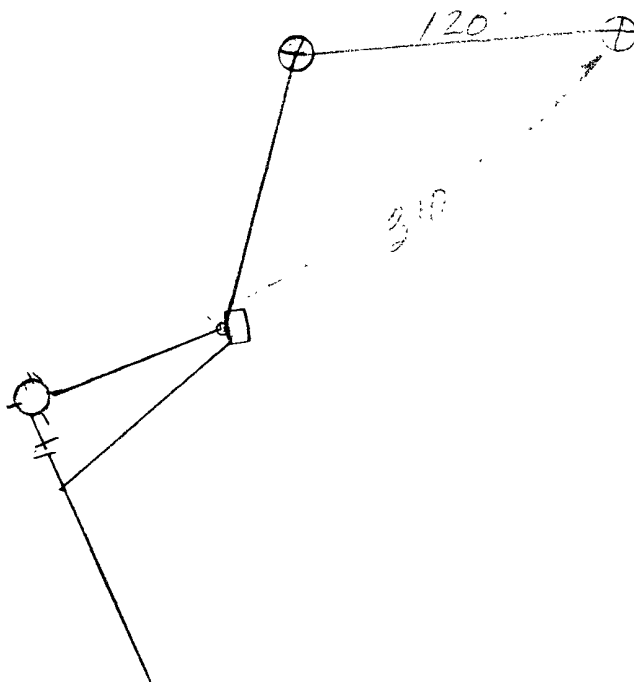

|            |         |
|------------|---------|
| WELL NO.   | 113     |
| CONTRACTOR | 411     |
| FIG NO.    | 121827  |
| REPORT NO. | 8-3     |
| DATE       | 7-21-66 |

| Driller  | Total Men in Crew | Driller | Total Men in Crew |
|----------|-------------------|---------|-------------------|
| CHAMBERS | 2                 | Driller | Total Men in Crew |

|            |      |        |            |       |        |
|------------|------|--------|------------|-------|--------|
| NO. DC     | SIZE | LENG.  | NO. DC     | SIZE  | LENG.  |
| BIT NO.    |      | NO. DC | SIZE       | LENG. | NO. DC |
| SERIAL NO. |      | STANDS | SERIAL NO. |       |        |

[illegible]

John Riggs. 31 hrs

| REMARKS                                                             | REMARKS | REMARKS                                      |
|---------------------------------------------------------------------|---------|----------------------------------------------|
| 7-21-66 - LEFT OLB Loc. AT 11:00 MOVED TO NEW Loc. ARRIVED AT 11:30 |         | DRILLED FROM 0' TO 200' WITH 4 1/2" DIAMETER |

Druck