

1550

#7

30-045-26414

E

#200

30-045-27156

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit N Sec. 10 Twp 29 Rng 8

Name of Well/Wells or Pipeline Serviced ROELOFS A #7, #200

cps 2108w

Elevation 6355' Completion Date 4/5/89 Total Depth 500' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 170'

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 460', 450', 440', 430', 420', 410', 340', 280', 270', 261'

Depths vent pipes placed: 490'

Vent pipe perforations: 380'

Remarks: (gb #1)

RECEIVED
MAY 31 1991
OIL CON. DIV.
DIST. 8

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

**WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG**

Comp
4-11-89Drilling Log (Attach Hereto) ☒

Completion Date 4-5-89

CPS #	Well Name; Line or Plant:	Work Order #	Static:	Ins. Union Check																																																												
2108-W	ROELOFS A #200 ROELOFS A #7	3484A 54040A	600'NE = .76 600'NE = .80	☒ Good ☐ Bad																																																												
Location: N 10-29-8	Anode Size: 2" x 60"	Anode Type: Duriron	Size Bit: 6 3/4"																																																													
Depth Drilled: 500'	Depth Logged: 490'	Drilling Rig Time	Total Lbs. Coke Used:	Lost Circulation Mat'l Used:																																																												
<table border="1"> <tr> <td>Anode Depth</td> <td># 1 460'</td> <td># 2 450'</td> <td># 3 440'</td> <td># 4 430'</td> <td># 5 420'</td> <td># 6 410'</td> <td># 7 340'</td> <td># 8 280'</td> <td># 9 270'</td> <td># 10 261'</td> </tr> <tr> <td>Anode Output (Amps)</td> <td># 1 2.4</td> <td># 2 2.9</td> <td># 3 3.9</td> <td># 4 3.3</td> <td># 5 3.3</td> <td># 6 2.6</td> <td># 7 2.5</td> <td># 8 3.5</td> <td># 9 3.8</td> <td># 10 3.1</td> </tr> <tr> <td>Anode Depth</td> <td># 11</td> <td># 12</td> <td># 13</td> <td># 14</td> <td># 15</td> <td># 16</td> <td># 17</td> <td># 18</td> <td># 19</td> <td># 20</td> </tr> <tr> <td>Anode Output (Amps)</td> <td># 11</td> <td># 12</td> <td># 13</td> <td># 14</td> <td># 15</td> <td># 16</td> <td># 17</td> <td># 18</td> <td># 19</td> <td># 20</td> </tr> <tr> <td>Total Circuit Resistance</td> <td colspan="5">Volts 12.08</td> <td colspan="5">Amps 15.9</td> <td colspan="5">Ohms .76</td> </tr> </table>					Anode Depth	# 1 460'	# 2 450'	# 3 440'	# 4 430'	# 5 420'	# 6 410'	# 7 340'	# 8 280'	# 9 270'	# 10 261'	Anode Output (Amps)	# 1 2.4	# 2 2.9	# 3 3.9	# 4 3.3	# 5 3.3	# 6 2.6	# 7 2.5	# 8 3.5	# 9 3.8	# 10 3.1	Anode Depth	# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20	Anode Output (Amps)	# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20	Total Circuit Resistance	Volts 12.08					Amps 15.9					Ohms .76				
Anode Depth	# 1 460'	# 2 450'	# 3 440'	# 4 430'	# 5 420'	# 6 410'	# 7 340'	# 8 280'	# 9 270'	# 10 261'																																																						
Anode Output (Amps)	# 1 2.4	# 2 2.9	# 3 3.9	# 4 3.3	# 5 3.3	# 6 2.6	# 7 2.5	# 8 3.5	# 9 3.8	# 10 3.1																																																						
Anode Depth	# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20																																																						
Anode Output (Amps)	# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20																																																						
Total Circuit Resistance	Volts 12.08					Amps 15.9					Ohms .76																																																					
No. 8 C.P. Cable Used		No. 2 C.P. Cable Used																																																														


Remarks: DRILLED 500', LOGGED 490'. DRILLER SAID WATER AT 170'. INSTALLED 490' of 1" PVC VENT PIPE, PERFORATED BOTTOM 380'

* Build Power TO LOCATION. EST. 2800'

Rectifier Size: 40 V 16 A
 Addn'l Depth _____
 Depth Credit: 10' 3.25
 Extra Cable: 205' 20
 Ditch & 1 Cable: 575' 1.70
 25' Meter Pole: _____
 20' Meter Pole: 1
 10' Stub Pole: _____
 Junction Box: 1

All Construction Completed

GROUND BED LAYOUT SKETCH

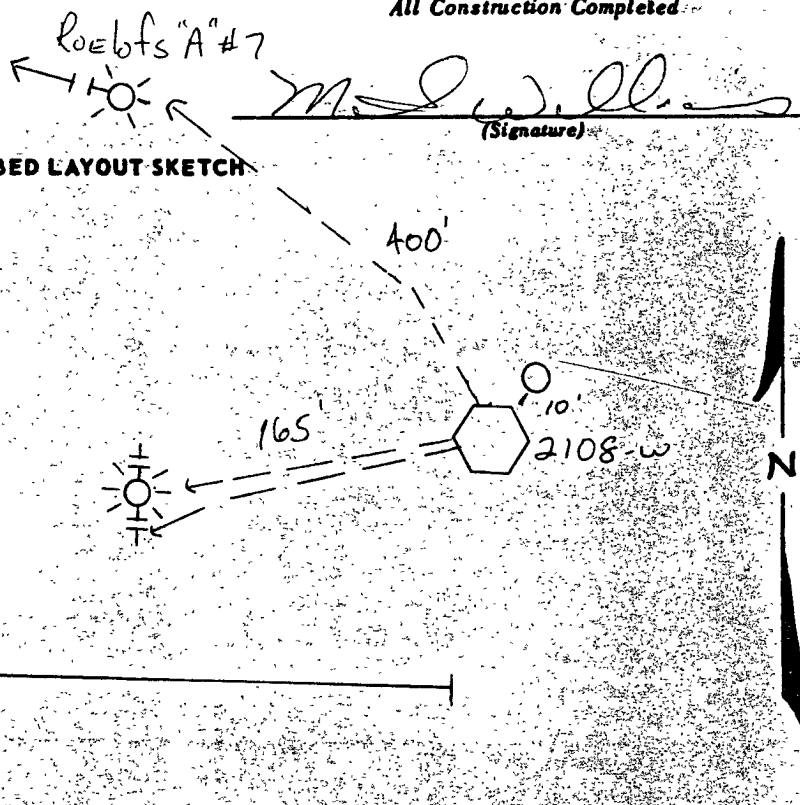

3870.00 ✓

599.00 ✓

- 37.50 ✓

41.00 ✓

402.50 ✓

312.50 ✓

237.00 ✓

5424.50 ✓

271.23 ✓

5695.73 ok 93

6355

2108

D. CRASS DRILLING CO.

Drill No. 3

DRILLER'S WELL LOG

S. P. No. Rock A-200 Date 4-5-89
 Client Meridian Oil Co. Prospect _____
 County SAN JUAN State New Mex.

If hole is a redrill or if moved from original staked position show distance
 and direction moved: _____

FROM	TO	FORMATION — COLOR — HARDNESS
0	140	SANDSTONE
140	150	SHALE
150	180	SAND ✓
180	200	SANDY SHALE
200	230	SHALE
230	260	SAND
260	305	SHALE
305	340	SANDSTONE
340	350	SHALE
350	410	SANDSTONE
410	480	SHALE
480	500	SANDY SHALE

Mud _____ Brom _____ Lime _____

Rock Bit Number _____ Make _____

Remarks: Water @ 170'

Driller Lonnie Brown