

1538

30-045-27086

E

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit F Sec. 24 Twp 29 Rng 8

Name of Well/Wells or Pipeline Serviced HARDIE A COM #210

cps 2118w

Elevation 6610' Completion Date 4/18/89 Total Depth 300' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 90'

Depths gas encountered: N/A


Type & amount of coke breeze used: N/A

Depths anodes placed: 250', 240', 230', 220', 210', 200', 190', 130', 120', 105'

Depths vent pipes placed: 305'

Vent pipe perforations: 240'

Remarks: gb #1

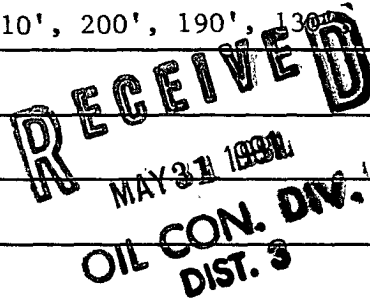

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

**WELL CASING .
CATHOLIC PROTECTION CONSTRUCTION REPORT
DAILY LOG**

Drilling Log (Attach Hereto) ☒Completion Date 4-18-89

CPS #	Well Name, Line or Plant:	Work Order #	State:	Ins. Union Check																																																		
2118-W	HARDIE A com #210	3458A	600' SE - 944	☒ Good ☐ Bad																																																		
Location: F24-29-8	Anode Size: 2" x 60"	Anode Type: Duriron	Size Bit: 6 3/4"																																																			
Depth Drilled 300'	Depth Logged 300'	Drilling Rig Time	Total Lbs. Coke Used	Loss Circulation Mat'l Used																																																		
<table border="1"> <tr> <td colspan="5">Anode Depth</td> </tr> <tr> <td># 1 250'</td> <td># 2 240'</td> <td># 3 230'</td> <td># 4 220'</td> <td># 5 210'</td> </tr> <tr> <td colspan="5">Anode Output (Amps)</td> </tr> <tr> <td># 1 3.1</td> <td># 2 4.2</td> <td># 3 4.3</td> <td># 4 4.7</td> <td># 5 3.9</td> </tr> <tr> <td colspan="5">Anode Depth</td> </tr> <tr> <td># 11</td> <td># 12</td> <td># 13</td> <td># 14</td> <td># 15</td> </tr> <tr> <td colspan="5">Anode Output (Amps)</td> </tr> <tr> <td># 11</td> <td># 12</td> <td># 13</td> <td># 14</td> <td># 15</td> </tr> <tr> <td colspan="2">Total Circuit Resistance</td> <td colspan="2">No. 8 C.P. Cable Used</td> <td>No. 2 C.P. Cable Used</td> </tr> <tr> <td colspan="2">Volts 1242</td> <td colspan="2">Amps 19.3</td> <td>Ohms .644</td> </tr> </table>					Anode Depth					# 1 250'	# 2 240'	# 3 230'	# 4 220'	# 5 210'	Anode Output (Amps)					# 1 3.1	# 2 4.2	# 3 4.3	# 4 4.7	# 5 3.9	Anode Depth					# 11	# 12	# 13	# 14	# 15	Anode Output (Amps)					# 11	# 12	# 13	# 14	# 15	Total Circuit Resistance		No. 8 C.P. Cable Used		No. 2 C.P. Cable Used	Volts 1242		Amps 19.3		Ohms .644
Anode Depth																																																						
# 1 250'	# 2 240'	# 3 230'	# 4 220'	# 5 210'																																																		
Anode Output (Amps)																																																						
# 1 3.1	# 2 4.2	# 3 4.3	# 4 4.7	# 5 3.9																																																		
Anode Depth																																																						
# 11	# 12	# 13	# 14	# 15																																																		
Anode Output (Amps)																																																						
# 11	# 12	# 13	# 14	# 15																																																		
Total Circuit Resistance		No. 8 C.P. Cable Used		No. 2 C.P. Cable Used																																																		
Volts 1242		Amps 19.3		Ohms .644																																																		

Remarks: DRILLED 300' LOGGED 300'. DRILLER SAID WATER
AT 90'. INSTALLED 305' OF 1" PVC VENT PIPE, PERFORATE
BOTTOM 240'


* CAN FLOW AC FROM 1303-W EST. 1800'

Rectifier Size: 40V 16A
 Addn'l Depth _____
 Depth Credit: 200' 3.75
 Extra Cable: 450' .20
 Ditch & 1 Cable: 360' .70
 25' Meter Pole: _____
 20' Meter Pole: _____
 10' Stub Pole: _____
 Junction Box: _____

All Construction Completed

M. Sullivan
 (Signature)

GROUND BED LAYOUT SKETCH

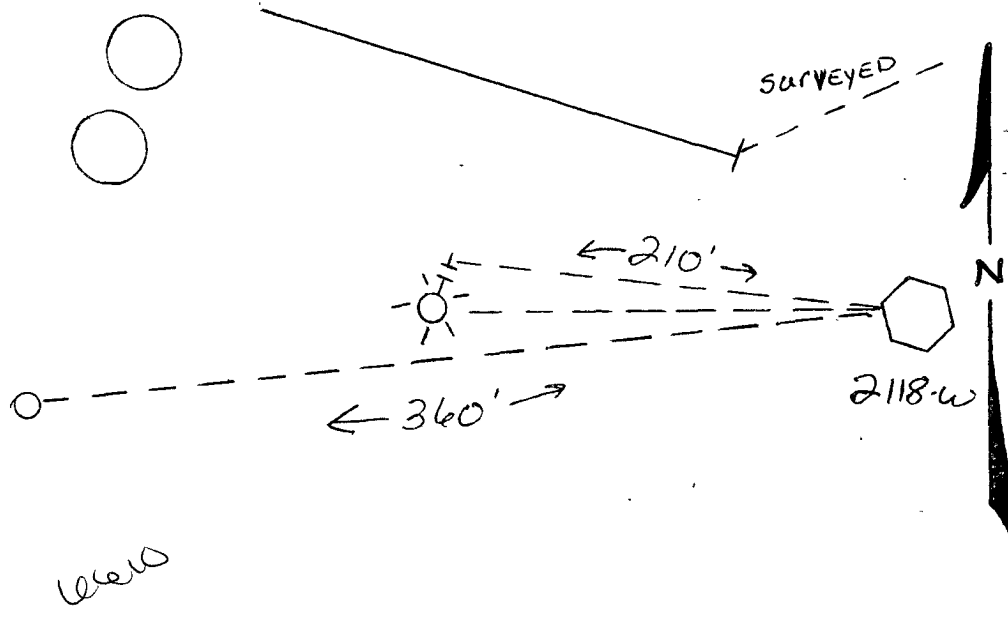

3870.00 ✓

599.00 ✓

- 750.00 ✓

90.00 ✓

252.00 ✓

144.50 ✓

237.00

4442.50

222.13 ✓

4664.63

4664.63
 4664.63

Darrell Crass DRILLING CO. 2118

Drill No. 3

DRILLER'S WELL LOG

S. P. No. Hardie A Com #210 Date 4-18-89
Client Meridian Oil Co. Prospect _____
County SAN JUAN State New Mex.

If hole is a redrill or if moved from original staked position show distance
and direction moved: _____

FROM	TO	FORMATION — COLOR — HARDNESS
0	80	SANDSTONE
80	100	SHALE SAND
100	150	SHALE
150	160	SANDY SHALE
160	170	SHALE
170	180	SANDSTONE
180	250	SHALE
250	265	SANDY SHALE
265	300	SANDSTONE

Mud _____ Brm _____ Lime _____

Rock Bit Number _____ Make _____

Remarks: Water @ 90'

Driller Ronnie Brown