

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS  
NORTHWESTERN NEW MEXICO  
(Submit 3 Copies to OCD Aztec Office)

Operator: BLACKWOOD & NICHOLS CO. Location: Unit I, Sec. 2, Twp 30N, Rng 7W.

Name of Well/Wells or Pipeline Served NEBU 14A

Elevation 6380' Completion Date 6-15-93 Total Depth 315' Land Type\* Surface: S Mineral: E 289-23

Casing, Sizes, Types & Depths 8-5/8" SCH 40 P.V.C. - 100'

If Casing is cemented, show amounts & types used 20 sks Portland Zia I-II

If Cement or Bentonite Plugs have been placed, show depths & amounts used N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 190' - small amount of fresh H<sub>2</sub>O - not enough for sample

Depths gas encountered: N/A


Type & amount of coke breeze used: Asbury (4518) Flo-Coke, 4,000#

Depths anodes placed: 300' to 180' - 10 anodes

Depths vent pipes placed: 315' to 4' above ground level

Vent pipe perforations: 315' to 115'

Remarks: H<sub>2</sub>O used to log from Frances Canyon

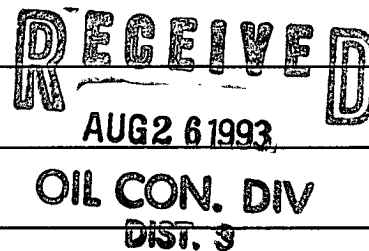

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

\*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.  
If Federal or Indian, add Lease Number.

Signed by: James K. Allen Title: Operations Engineer Date: 8/11/93

# BLACKWOOD & NICHOLS CATHODIC GROUND BED DRILLERS REPORT

WP# SN-24 WELL# N.E.B.U. #14-A

I S 2 T 30 R 7

[illegible]

RILLER 

INSPECTOR Mark M. K. L. L.