

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS IN
NORTHWEST NEW MEXICO

OPERATOR: Williams Production Company LOCATION: G 19 31 5 LEASE NUMBER: SF-078764

NAME OF WELL/WELLS OR PIPELINE SERVICED: ROSA UNIT #204 FRT
DUALWELL N/A

30-039-24239

ELEVATION: 6340' GR COMPLETION DATE: 10/24/88 TOTAL DEPTH: 500 ft. LAND TYPE: FED

CASING: 7-5/8" 26.4# K-55 Set @ N/A ft. Casing is not cemented.

CEMENT PLUG--Top:N/A' Bottom: N/A' Used 0 sx. Class "B" (1.18 cu.ft./sk).

WATER DEPTH: 80 ' Water zone thickness not available. WATER DESCRIPTION: Fresh


DEPTH OF GAS: N/A '

COKE: 5130 lbs. of Metallurgical coke breeze used.

NUMBER & TYPE OF ANODES: 10-D TOP ANODE @ 360 ft. BOTTOM ANODE @ 465 ft.

VENT PIPE: 1" PVC Set @ 500 ft. Vent pipe perforated from 340 ft. to 500 ft.

REMARKS:

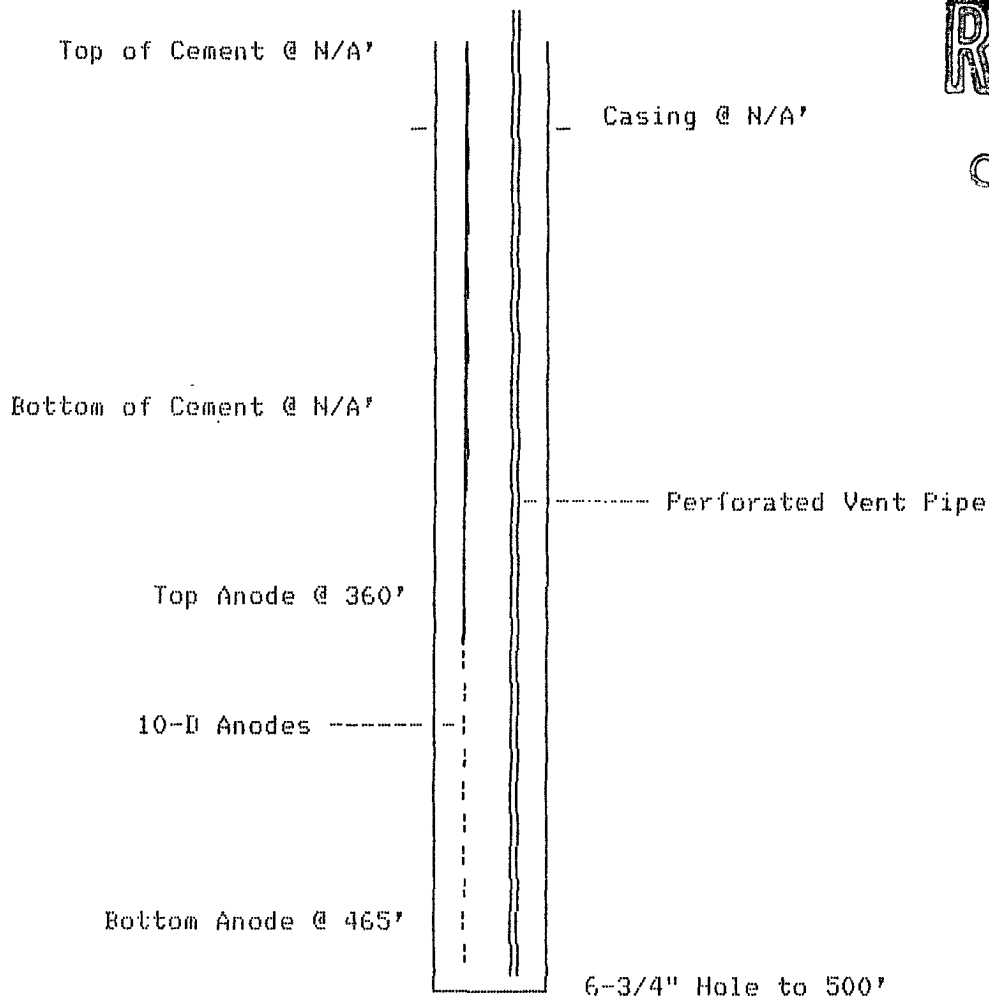

RECEIVED
DEC 11 1991
OIL CON. DIST.

DRILLING LOG

KOSA 204

(NOTE WHERE WATER IS LOCATED)

SOIL

Sandrock

WATER

Shale

Sandy shale

sandrock

Shale

Sandy shale

Sand rock

Sandy shale

0	
1	"
2	"
3	"
4	"
5	"
6	"
7	"
8	"
9	"
10	"
11	"
12	"
13	"
14	"
15	"
16	"
17	"
18	"
19	"
20	"
21	"
22	"
23	"
24	"
25	"
26	"
27	"
28	"
29	"
30	"
31	"
32	"
33	"
34	"
35	"
36	"
37	"
38	"
39	"
40	"
41	"
42	"
43	"
44	"
45	"
46	"
47	"
48	"
49	"
50	"
51	"
52	"
53	"
54	"
55	"
56	"
57	"
58	"
59	"
60	"
61	"
62	"
63	"
64	"
65	"
66	"
67	"
68	"
69	"
70	"
71	"
72	"
73	"
74	"
75	"
76	"
77	"
78	"
79	"
80	"
81	"
82	"
83	"
84	"
85	"
86	"
87	"
88	"
89	"
90	"
91	"
92	"
93	"
94	"
95	"
96	"
97	"
98	"
99	"
100	"
101	"
102	"
103	"
104	"
105	"
106	"
107	"
108	"
109	"
110	"
111	"
112	"
113	"
114	"
115	"
116	"
117	"
118	"
119	"
120	"

LOCATI

204

DATE

10	130	250	370	490
15	135	255	375	495
20	140	260	380	500
25	145	265	385	505
30	150	270	390	510
35	155	275	395	
40	160	280	400	Total Amps 12.7
45	165	285	405	Total Volts 10.4
50	170	290	410	Total Res. —
55	175	295	415	
60	180	300	420	3.3 - 1
65	185	305	425	3.2 - 2
70	190	310	430	2.9 - 3
75	195	315	435	1.8 - 4
80	200	320	440	1.7 - 5
85	205	325	445	3.3 - 6
90	210	330	450	2.4 - 7
95	215	335	455	1.8 - 8
100	220	340	460	2.0 - 9
105	225	345	465	2.0 - 10
110	230	350	470	
115	235	355	475	
120	240	360	480	
125	245	365	485	