

30-045-22044 SS-6

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 Copies to OCD Aztec Office)

Operator: BLACKWOOD & NICHOLS CO. Location: Unit P, Sec. 24, Twp 30N, Rng 8W.

Name of Well/Wells or Pipeline Serviced NEBU 105A

Elevation 6326' Completion Date 7-12-93 Total Depth 375' Land Type* Surface: F Mineral: SF-078615A

Casing, Sizes, Types & Depths 8-5/8" SCH 40 P.V.C. - 100' 7 7/8" OPEN HOLE.

If Casing is cemented, show amounts & types used 20 sks Portland Zia I-II

If Cement or Bentonite Plugs have been placed, show depths & amounts used N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 190 - small amount

No water sample

Depths gas encountered: _____

Type & amount of coke breeze used: _____

Depths anodes placed: 370' to 210' - 10 anodes

Depths vent pipes placed: TD to 4' above ground level

Vent pipe perforations: 375' - 115'

Remarks: Groundbed 28° East of North & 183' from wellhead


If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

Signed by: James K. Acker

Title: Operations Engineer

Date: 8/11/93

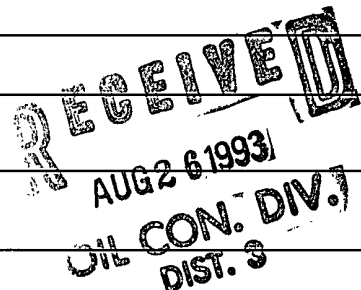

BLACKWOOD & NICHOLS
CATHODIC GROUND BED
DRILLERS REPORT

CP# 556 WELL# 105A

S 24 T 30N R 21

DEPTH	STRATA	NOTES	DEPTH	STRATA	NOTES
10'	↑				
15'					
20'					
25'					
30'					
35'					
40'					
45'					
50'	H				
55'	L				
60'	A				
65'	H				
70'	S				
75'					
80'					
85'					
90'					
95'					
100'	W				

DRILLER Gene Muntz

INSPECTOR Joe Mityak

BLACKWOOD & NICHOLS CATHODIC GROUND BED DRILLERS REPORT

WELL# SS-6 NEBU #105A

P_S 24 T 30 R 8

[illegible]

DRILLER

INSPECTOR