

6-30-045-20355
34-30-045-23556
DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator UNOCAL Location: Unit Sec. 5 Twp 27 Rng 8

Name of Well/Wells or Pipeline Serviced Filan No. 6, & 3Y

Elevation 6038' Completion Date 2/26/91 Total Depth 300' Land Type* F

Casing, Sizes, Types & Depths NA

If Casing is cemented, show amounts & types used NA

If Cement or Bentonite Plugs have been placed, show depths & amounts used
NA

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. Moisture only

Depths gas encountered: NA

Type & amount of coke breeze used: Carbo-40, 99.9% Carbon = 1233 lbs

Depths anodes placed: 240', 250', 260', 270', 280', 290'

Depths vent pipes placed: 0' to 300' deep

Vent pipe perforations: Laser cut slots from 100' to 300' deep

Remarks: First ground bed installed at this location

RECEIVED

MAR 19 1991

OIL CON. DIV.

Dist. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

Unocal

Cathodic Protection Services
A LUKENS COMPANY

CIP #: 751-00084 WELL NAME: Folan N#6

LOCATION: 5-27-8 DATE: 2-26-91

TOTAL VOLTS: 12.4 TOTAL AMPS: 12.5 OHMS RESISTANCE: 0.992

												ANODE HEADINGS			
DEEP	100 ANODE	ANODE NO.	DEEP	100 ANODE	ANODE NO.	DEEP	100 ANODE	ANODE NO.	DEEP	100 ANODE	ANODE NO.	NO.	DEPTH	NO COKE	WITH COKE
5			105	1.5		365			545			1	290	4.1	12.5
10			190	1.8		370			550						
15			195	1.7		375			555						
20			200	1.7		380			560						
25			205	2.2		385			565						
30			210	2.0		390			570						
35			215	2.0		395			575						
40			220	2.3		400			580						
45			225	2.2		405			585						
50			230	2.5		410			590						
55			235	2.5		415			595						
60			240	2.5	6	420			600						
65			245	2.7		425			605						
70			250	2.9	5	430			610						
75			255	2.8		435			615						
80			260	3.1	4	440			620						
85			265	3.3		445			625						
90			270	3.3	3	450			630						
95			275	4.0		455			635						
100			280	4.4	2	460			640						
105			285	3.9		465			645						
110			290	4.1	1	470			650						
115			295	4.0		475			655						
120	.4		300			480			660						
125	.4		305			485			665						
130	.5		310			490			670						
135	.7		315			495			675						
140	.8		320			500			680						
145	.8		325			505			685						
150	.9		330			510			690						
155	.9		335			515			695						
160	.9		340			520			700						
165	1.0		345			525			705						
170	.9		350			530			710						
175	1.5		355			535			715						
180	1.4		360			540			720						

REMARKS: 300' - 0.6" (200') Allent

CPS

MO-TE DRILLING, INC.

DAY Tuesday

DRILLER Jack LEFT TOWN 7:20 ARRIVED FIELD 12:00
 HELPER Jason LEFT FIELD 5:30 ARRIVED TOWN 6:30
 HELPER Donald TOTAL FOOTAGE TODAY

RIG NO. 203 DATE 2-26-91 CLIENT CPS

BEGIN WORK ON HOLE NO. #6 AT FEET

BEGIN WORK ON HOLE NO. AT FEET

TIME		ACTIVITY
FROM	TO	
0	67	Sandstone, brown, soft
67	172	Sandstone, gray, soft
172	257	Shale, gray, firm
257	283	Sandstone, gray, soft
283	300	Shale, gray, soft
300		T.D.



BIT RECORD

SIZE & MAKE	SERIAL NO.	FOOTAGE

CIRCULATION MATERIAL


QUAN.	UNIT	MATERIAL

NO. OF LOADS OF WATER SOURCE

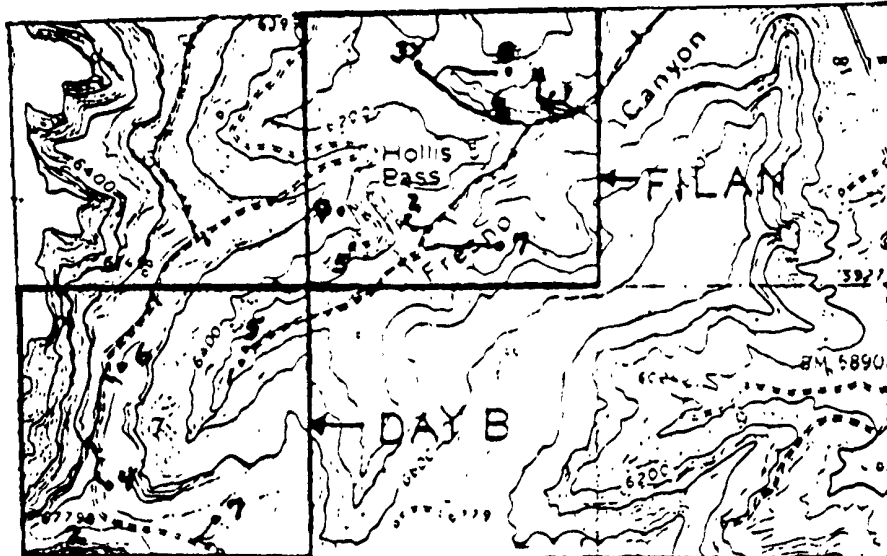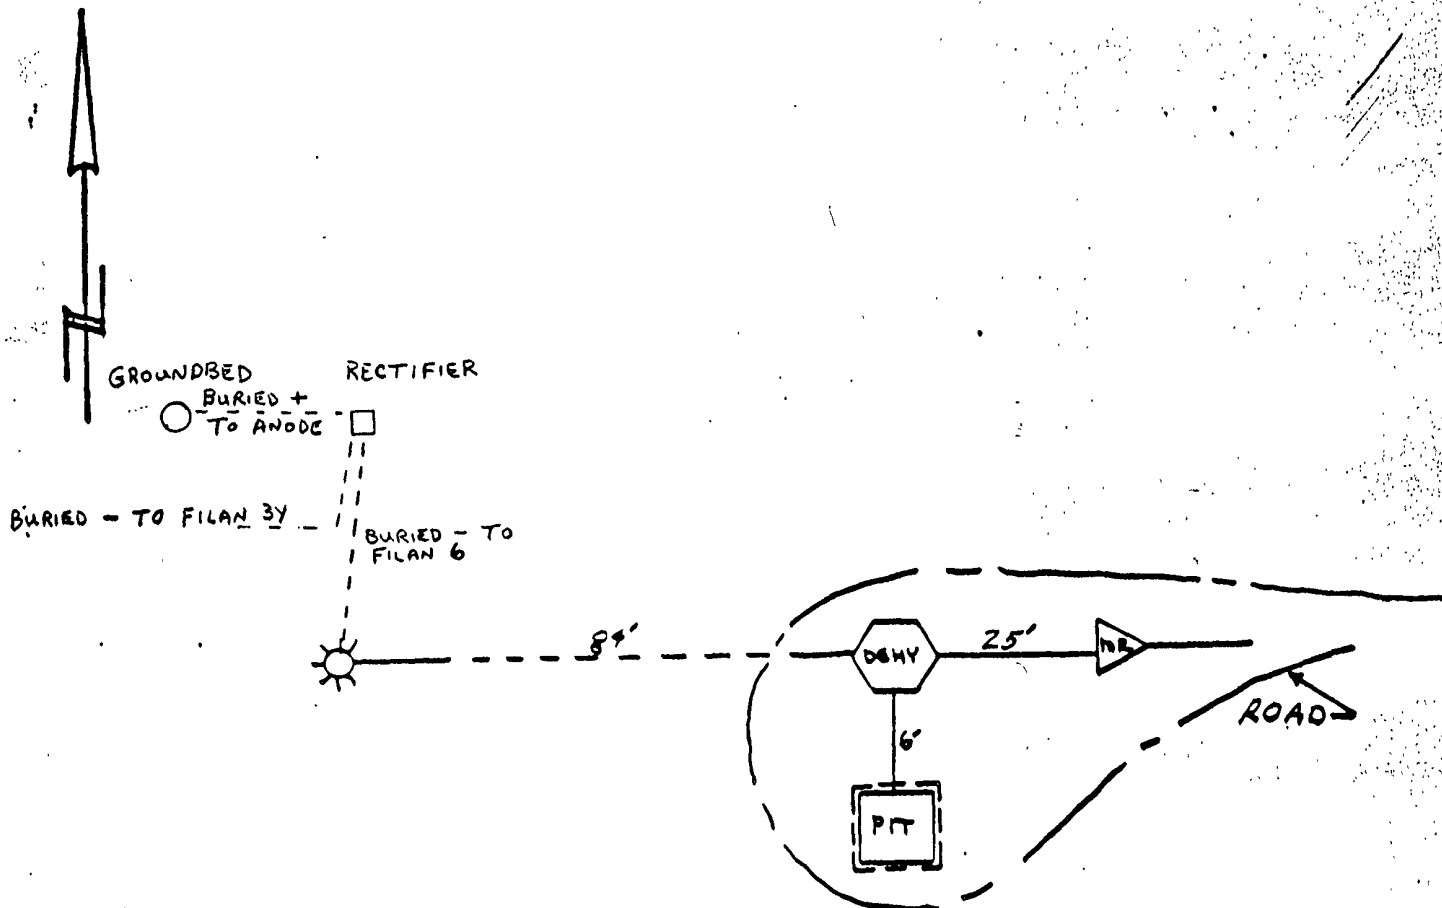

BURIED NEG CABLE IN ROAD

- LOCATION OF GROUNDED & RECTIFIER



ENG. REC.	DATE
DRAWN	P.S.G. 4.9.83
CHECKED	
CHECKED	
PROJ. APP.	
DESIGN	
PRINT RECORD	

FILAN #6
 SW/NE, Sec 5, T27N, R8W, NMPM
 SF 078461

SCALE: NONE

REV.