

3A- 30-045-22713
4- 30-045-20493
5- 30-045-23975
202-30-045-26987

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit C Sec. 18 Twp 29 Rng 8

Name of Well/Wells or Pipeline Serviced DAY #3A, #4, #5, #202

cps 1329w

Elevation 6388' Completion Date 4/5/89 Total Depth 380' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A.

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A


Type & amount of coke breeze used: N/A

Depths anodes placed: 350', 340', 330', 320'

Depths vent pipes placed: N/A

Vent pipe perforations: FROM 60' TO BOTTOM

Remarks: gb #3



If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHOLIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

J. W. W. 4-18-89

Drilling Log (Attach Hereto)



3A, 4, 5

560-7791-001-001

Completion Date 4-5-89

CPS #		Well Name, Line or Plant:		Work Order #		Static:		Ins. Union Check	
1329 2112-w		Day #202		3290A		600' w = .85		☒ Good ☐ Bad	
Location:		Anode Size:		Anode Type:		Size Bit:			
C 18-29-8		2" x 60"		Duriron		6 3/4"			
Depth Drilled		Depth Logged		Drilling Rig Time		Total Lbs. Coke Used		Lost Circulation Mat'l Used	
520'		500'							
Anode Depth		Anode Output (Amps)		Anode Depth		Anode Output (Amps)			
# 1 440'	# 2 430'	# 3 395'	# 4 385'	# 5 335'	# 6 328'	# 7 350'	# 8 340'	# 9 330'	# 10 320'
# 1 1.5	# 2 1.8	# 3 1.7	# 4 2.0	# 5 2.1	# 6 2.3	# 7 2.1	# 8 2.5	# 9 2.5	# 10 2.3
# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20
# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20
Total Circuit Resistance				No. 8 C.P. Cable Used				No. 2 C.P. Cable Used	
Volts 12.1		Amps 10.9		Ohms 1.11					

Remarks: DRILLED 520' LOGGED 500'. DRILLER SAID DAMP AT 120'. LOADED 6 ANODES IN 1ST HOLE THEN HOLE SANDED IN, MOVED OVER 10' AND DRILLED 2ND HOLE 380' FOR LAST 4 ANODES. INSTALLED 1" PVC VENT PIPE IN BOTH HOLES, PERFORATED FROM 60' TO BOTTOM ON BOTH


* CAN PLOW AC FROM 1329-W (300')

Rectifier Size: 40 V 16 A
 Addn'l Depth: —
 Depth Credit: —
 Extra Cable: 520' . 20
 Ditch & 1 Cable: 480' . 70
 25' Meter Pole: —
 20' Meter Pole: —
 10' Stub Pole: —
 Junction Box: —

All Construction Completed

M. S. Williams
(Signature)

GROUND BED LAYOUT SKETCH

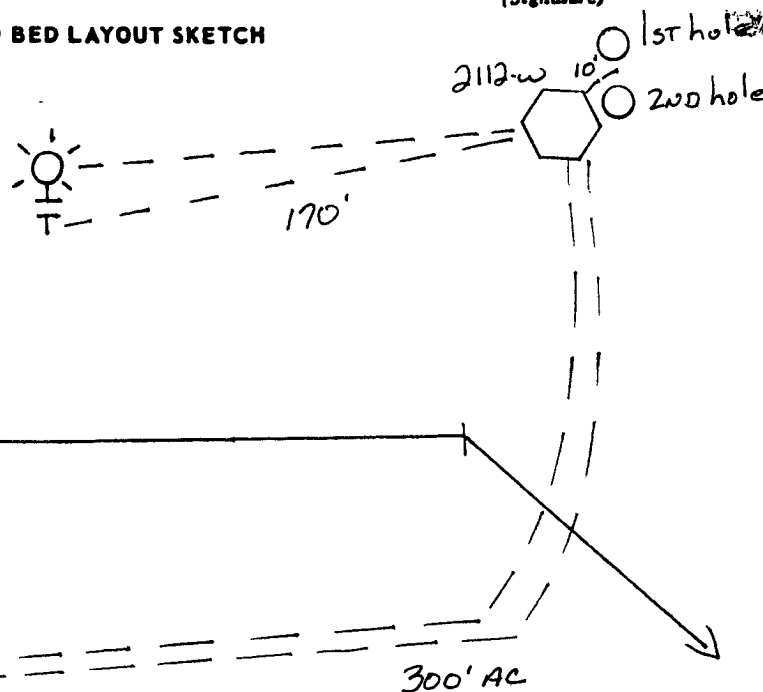

3,870.00 ✓
 599.00 ✓
 104.00 ✓
 336.00 ✓
 144.50 ✓
 237.00 ✓

5290.50 ✓
 264.53 ✓

5555.03 ✓ OK

6358

SCOTT DRILLING, INC.

~~P.O. Box 269~~ 1802 LANE 10

POWELL, WY. 82435

(307) 754-2056

WELL NO. *Log* 202

FORMATION:

0-6 Clay

6-30 shale

30 100 ~~shale~~

100 120 shale

120 510 sandstone

shale Ledger

PERFORATIONS:

STATIC WATER TABLE

GRAVEL PACKING

CASED WITH PVC

160 PSI

DRILL: GARDNER DENVER

MAYHEW 1000-ROTARY

PRICE \$ PER FOOT

TOTAL INVOICE:

1763 3A- 30-045-22113
4- 30-045- 20493
5- 30-045- 23975
202- 30-045- 26987

E

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NW Sec. 18 Twp 29 Rng 8

Name of Well/Wells or Pipeline Serviced DAY #3A, #4, #5, #202

cps 1329w

Elevation 6388' Completion Date 5/14/79 Total Depth 680' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/a

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. NO WATER

Depths gas encountered: N/A

Type & amount of coke breeze used: 54 SACKS

Depths anodes placed: 620', 610', 600', 580', 570', 560', 550', 540', 530', 495'

Depths vent pipes placed: 640'

Vent pipe perforations: 320'

Remarks: gb #1

RECEIVED

MAY 31 1991

OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

1762

3A- 30-045-22713
4- 30-045-20493
5- 30-045-23975
202-30-045-26987

E

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)Operator MERIDIAN OIL Location: Unit C Sec. 18 Twp 29 Rng 8Name of Well/Wells or Pipeline Serviced DAY #3A, #4, #5, #202

cps 1329w

Elevation 6388' Completion Date 4/5/89 Total Depth 520' Land Type* N/ACasing, Sizes, Types & Depths N/AIf Casing is cemented, show amounts & types used N/a

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. DAMP AT 120'Depths gas encountered: N/AType & amount of coke breeze used: N/ADepths anodes placed: 440', 430', 395', 385', 335', 328'Depths vent pipes placed: N/AVent pipe perforations: FROM 60' TO BOTTOMRemarks: gb#1RECEIVED
MAY 31 1991
OIL CON. DIV
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.