

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT--" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

UNION OIL COMPANY OF CALIFORNIA DBA UNOCAL

3. Address and Telephone No

913 W. BROADWAY, P.O. BOX 850, BLOOMFIELD, NEW MEXICO 87413

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

RINCON UNIT 18R CH/PC: 35-T27N-R7W, 805' FNL-1810' FWL, 6698' GR

5. Lease Designation and Serial No  
SF - 080385

6. If Indian, Allottee or Tribe Name

7. If Unit or CA. Agreement Designation

RINCON UNIT

8. Well Name and No

RINCON UNIT #18R

9. API Well No

30-039-22204

10. Field and Pool, or Exploratory Area

CHACRA/PICTURE CLIFF

11. County or Parish, State

RIO ARRIBA, NEW MEXICO

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☒ Notice of Intent  
☐ Subsequent Report (FINAL)  
☐ Final Abandonment Notice

TYPE OF ACTION

☐ Abandonment  
☐ Recompletion  
☐ Plugging Back  
☐ Casing Repair  
☐ Altering Casing  
☒ Other CATHODIC PROTECTION  
☐ Change of Plans  
☐ New Construction  
☐ Non-Routine Fracturing  
☐ Water Shut-off  
☐ Conversion to Injection  
☐ Dispose Water

(Note report results of multiple completion on Well Completion or Recompletion Report and Log form)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Proposed installation of a replacement cathodic protection ground bed:

PROCEDURE: Drill a 6" diameter hole, 300' deep within the existing well location boundary. Twelve Dur-Iron anodes will be installed below the upper most water bearing formation, in favorable locations. This will be backfilled with 99.5% metallurgical carbon coke breeze to completely surround the anodes.

This new ground bed will be connected in series with the existing ground bed using a #8 cable plowed into a depth of 18" to 24" on the location pad.  
(SEE ATTACHED MAP)

Unocal's project completion expectation is 12/01/96


RECEIVED  
SEP 23 1996  
OIL CON. DIV.  
DIST. 3

14. I hereby certify that the foregoing is true and correct

Signed Donald E. Linthicum Donald E. Linthicum Title Production Technician Date 9/16/96  
(This space for Federal or State office use)

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_  
Conditions of approval, if any:

↑  
N

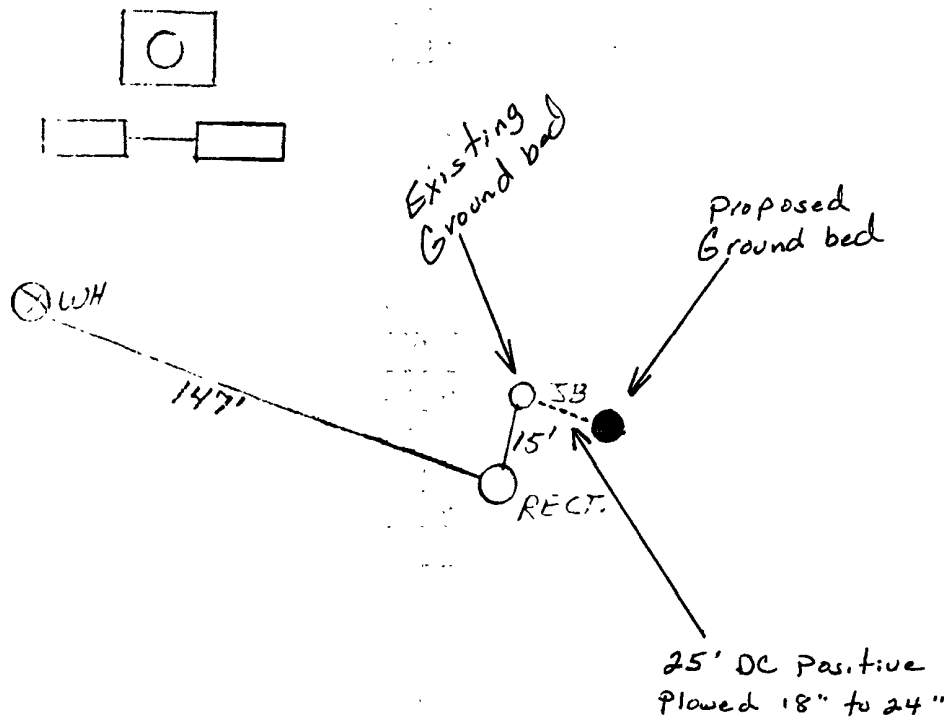

POS. 15'  
NEG. 147'

**CPS**  
Cathodic Protection Services  
A LUKENS COMPANY

RINCON #18R

DES **CF**  
DR **JK**  
SCALE **NONE**

CK  
APP  
DATE **11-30-87**

DWG NO  
REV  
**00027-03**

NO REVISION

DATE

COY UNIT

