

11- 30-045-09610
3- 30-045-21135

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 11 Twp 30 Rng 10

Name of Well/Wells or Pipeline Serviced SAN JUAN #11, SUNRAY H #3
cps 205w

Elevation 6571' Completion Date 5/16/63 Total Depth 280' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. POSSIBLE WATER BEARING FORMATION
FROM 145' TO 212'.

Depths gas encountered: N/A

Type & amount of coke breeze used: 1955 lbs.

Depths anodes placed: 258', 252', 246', 210', 195', 185', 120', 114'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: gb #1

RECEIVED

MAY 31 1991

OIL CON. D

DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

DATE 5-16-63

WELL NAME SAN VUON #11

CPS NO. 205W

LOCATION 11-30N-10W

WORK ORDER NUMBER 184-40542-50-02

ANODE HOLE DEPTH 280'

TOTAL DRILLING RIG TIME 9 1/2 hrs

DRILLING TIME FOR RECTIFIER POLE HOLE 0

TYPE AND SIZE BIT USED 0

NUMBER SACKS MUD USED 0

NUMBER SACKS LOST CIRCULATION MAT'L USED 0

ANODE DEPTHS #1 258', #2 252', #3 246', #4 210 5' 195' 6' 185' 7' 120' 8' 114'

TOTAL LBS. COKE USED 1955/65

ANODE OUTPUTS 12 VOLTS, #1 1.6, #2 1.7, #3 1.6, #4 1.6 5' 195' 6' 185' 7' 120' 8' 114'

TOTAL CIRCUIT RESISTANCE: VOLTS 11.0 AMPERES 5.8 OHMS 1.9

NUMBER FEET SURFACE CABLE CONDUIT 368'

DRILLING LOG (ATTACH HERETO).

FORMATION LOG (ATTACH HERETO).

REMARKS: STATIC 9/5 = .74 R 600' E

INSTALLED 28V 12A RECT

SERIAL # = 6266140


POSSIBLE WATER BEARING FORMATION FROM 145' TO 212'

ALL CONSTRUCTION COMPLETED

S. Paulik

SIGNATURE

GROUND BED LAYOUT SKETCH

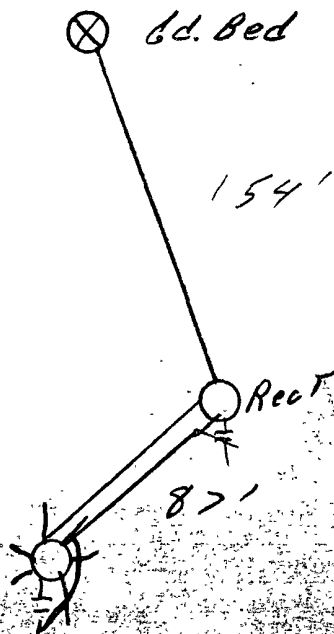

ORIGINAL & 1 COPY
ALL REPORTS

0073'

15-16-1967

15-16-1967

Driller					Told Mouth crew					Driller					Told Mouth crew				
FROM	TO	FORMATION	WELL BIT	RE.M.	FROM	TO	FORMATION	WELL BIT	RE.M.	FROM	TO	FORMATION	WELL BIT	RE.M.	FROM	TO	FORMATION	WELL BIT	RE.M.
0	93	SS & SC,	280X		264	280	SS	280X											
Q3	145	SS & SC, SH.	"																
145	212	SS.	"																
212	264	SS & SC,	"																
BIT NO.		NO. DC	SIZE	LENG.	BIT NO.		NO. DC	SIZE	LENG.	BIT NO.		NO. DC	SIZE	LENG.	BIT NO.		NO. DC	SIZE	LENG.
SERIAL NO.		STANDS			SERIAL NO.		STANDS			SERIAL NO.		STANDS			SERIAL NO.		STANDS		
TYPE	ROCK	DOWN ON KELLY			TYPE		DOWN ON KELLY			TYPE		DOWN ON KELLY			TYPE		DOWN ON KELLY		
MAKE	W.M.	TOTAL DEPTH	280'		MAKE		TOTAL DEPTH			MAKE		TOTAL DEPTH			MAKE		TOTAL DEPTH		
MUD RECORD		MUD ADDITIVES USED AND RECEIVED			MUD RECORD		MUD ADDITIVES USED AND RECEIVED			MUD RECORD		MUD ADDITIVES USED AND RECEIVED			MUD RECORD		MUD ADDITIVES USED AND RECEIVED		
TIME	WT.	VIS.			TIME	WT.	VIS.			TIME	WT.	VIS.			TIME	WT.	VIS.		
FROM	TO	TIME BREAKDOWN			FROM	TO	TIME BREAKDOWN			FROM	TO	TIME BREAKDOWN			FROM	TO	TIME BREAKDOWN		
		MOVE & SETUP TIME BY hr.					Rig Time 9 1/2 hrs.												
		5-10-44 LEFT RIG AT 5:00 PM.																	
		5-16-63 LEFT Bloomfield AT 6:00 AM																	
		ARRIVED AT RIG AT 7:00 AM																	
		FINISHED hole AT 10:00 AM																	
REMARKS:					REMARKS:					REMARKS:									
5-15-68. Drilled TO 230'					2 floods water. 6 1/2 hrs.														
5-16-68. " FIRM 230' TO 280'					flood water 3 hrs.														

11