

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator Union Oil Company of California Location: Unit Sec. 25 Twp 27N Rng 7W

Name of Well/Wells or Pipeline Serviced Rincon #138 DK Rincon 60PC

Elevation 6721' Completion Date 10/12/65 Total Depth 300' Land Type* F

Casing, Sizes, Types & Depths None

If Casing is cemented, show amounts & types used _____

None

If Cement or Bentonite Plugs have been placed, show depths & amounts used

None

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. NA

RECEIVED

MAY 14 1990

Depths gas encountered: 1000 to 1050 fms OIL CON. DIV.!

OIL CON. DIV.!

DIST. 3

Type & amount of coke breeze used: type unknown 4140 lbs

Depths anodes placed: 241' to 275'

Depths vent pipes placed: NA

Vent pipe perforations: NA

Remarks: El Paso Natural Gas Co. was the operator at the time this ground bed was installed.

First ground bed installed at this location.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.

If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Date 10-25-65

Well Name <u>Rincon F 138</u>			CPS No. <u>717W</u>		
Location <u>N.E. 25-27. 7</u>			Work Order No. <u>184-5424-55-20</u>		
Anode Hole Depth <u>300'</u>	Total Drilling Rig Time <u>18 1/2 Hrs</u>	Type & Size Bit Used <u>7 1/8 Rock - 143 44</u>	No. Sacks Mud Used <u>1</u>		
No. Sacks Lost Circulation Mat'l Used	Anode Depth	#1 <u>275'</u>	#2 <u>268'</u>	#3 <u>261'</u>	#4 <u>254'</u>
		#5 <u>248'</u>	#6 <u>241'</u>		
Total Lbs. Coke Used <u>4140 lbs</u>	Anode Output (Volts)	#1 <u>3.4</u>	#2 <u>3.4</u>	#3 <u>3.6</u>	#4 <u>3.8</u>
		#5 <u>3.9</u>	#6 <u>3.6</u>		
Total Circuit Resistance	No. Ft. Surface Cable Conduit				
Volts <u>11.0</u>	Amps <u>8.7</u>	Ohms <u>1.26</u>	<u>367' #8 Stranded</u>		



Drilling Log (Attach Hereto). ☐

Remarks: Static 600' North = .61
Installed 28/12 25m ... 637168
4 lbs cement in ...
1617' #8 stranded in ...

All Construction Completed

[Signature]
(Signature)

GROUND BED LAYOUT SKETCH

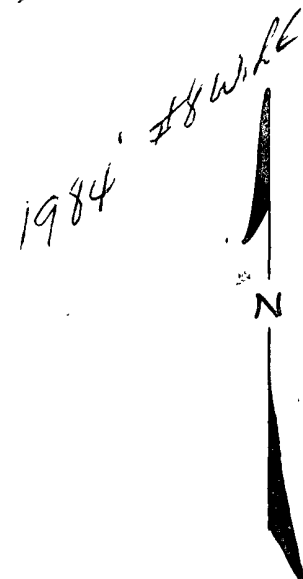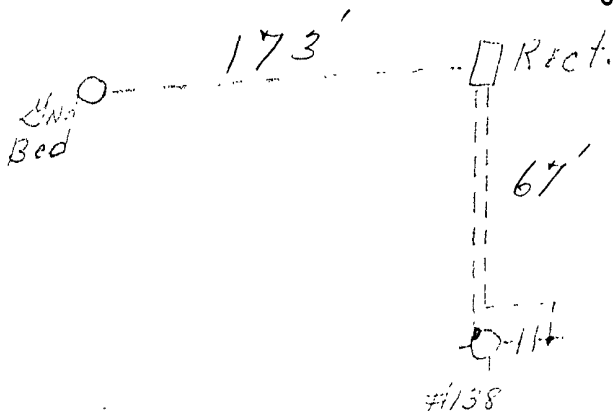

DAILY DRILLING REPORT

LEASE

WELL NO.

CONTRACTOR

RIG NO.

REPORT NO.

DATE 10-21-22-25 1965

MORNING

DAYLIGHT

EVENING

Driller					Driller					Driller				
Total Men In Crew					Total Men In Crew					Total Men In Crew				
FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.
0	42	Sandstone			230	230	Sandstone & Shale							
42	125	Shale			300									
125	150	Sandstone												
150	230	Shale												

T NO.				NO. DC				SIZE				LENG.			
SERIAL NO.				BIT NO.				NO. DC				SIZE			
STANDS				SERIAL NO.				STANDS				STANDS			
SINGLES				SIZE				SINGLES				SINGLES			
DOWN ON KELLY				TYPE				DOWN ON KELLY				TYPE			
MAKE				TOTAL DEPTH				MAKE				TOTAL DEPTH			

MUD RECORD			MUD, ADDITIVES USED AND RECEIVED			MUD RECORD			MUD, ADDITIVES USED AND RECEIVED			MUD RECORD			MUD, ADDITIVES USED AND RECEIVED		
Time	Wt.	Vis.	Time	Wt.	Vis.	Time	Wt.	Vis.	Time	Wt.	Vis.	Time	Wt.	Vis.	Time	Wt.	Vis.

FROM	TO	TIME BREAKDOWN	FROM	TO	TIME BREAKDOWN	FROM	TO	TIME BREAKDOWN

REMARKS -	REMARKS -	REMARKS -
10-21-65 left last loc. at 4:00 P.M. Arrived New loc. at 5:00 left Rig		
10-22-65 left yard at 6:00 arrived at Rig 7:45 Drilled pole hole and Drilled to 200 ft left Rig 5:00		
10-25-65 left yard at 6:00 arrived at Rig 7:45 Drilled from 200 ft to 300 ft finished at 2:30		

SIGNED: Toolpusher

Company Supervisor

Emmet Phelps