

85-30039-07072

184-30-039-07088

**DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)**

Operator Union Oil Company of California Location: Unit Sec. 15 Twp 27 Rng 7W

Name of Well/Wells or Pipeline Serviced Rincon 85 PC/MV Rincon #184 DK

Elevation 6756' Completion Date 9/22/1965 Total Depth 560' Land Type* F

Casing, Sizes, Types & Depths None

If Casing is cemented, show amounts & types used None

If Cement or Bentonite Plugs have been placed, show depths & amounts used
None

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 50' to 65' 15' thick

155' to 165' 10' thick

Depths gas encountered: NA

Type & amount of coke breeze used: type unknown 7140 lbs

Depths anodes placed: 160' to 320'

Depths vent pipes placed: 170'

Vent pipe perforations: ?

Remarks: El Paso Natural Gas Co. was the operator at the time this ground bed was installed.

First ground bed installed at this location

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

RECEIVED
MAY 1 1966

OIL COAL DIV.
DIST. 3

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Item 31

Date 9-22-65

Well Name Rincon # 85 & Rincon # 184			CPS No. 714 W		
Location NE 15-27-7			Work Order No. 53154 & 54275		
Anode Hole Depth 560	Total Drilling Rig Time 65 1/2 Hrs	Type & Size Bit Used 30010X = 120 778-3362X = 200-10262X = 240		No. Sacks Mud Used 0	
No. Sacks Lost Circulation Mat'l Used 0	Anode Depth	#1 190	#2 184	#3 178	#4 172
		#1 320	#2 310	#3 300	#4 294
Total Lbs. Coke Used 7140	Anode Output (Volts)	#1 6.0	#2 6.5	#3 6.3	#4 5.7
		#1 1.5	#2 1.5	#3 2.8	#4 2.4
Total Circuit Resistance Volts 12.0	Amps 12.0	Ohms 1.0	No. Ft. Surface Cable Conduit 1050'		

Drilling Log (Attach Hereto). ☐

Remarks: Static 600' S.E. #184 = .66

600' NE # 85 = .72

ONE Notch (I) = Cos. #184

(Paranite Wire Used)
ON ANODES

TWO Notches (II) = F.H. #184

THREE Notches (III) = Cos. # 85

Hole Caved. - Cleaned out. Couldnt get Probe in. Cleaned out


Second Time - Could only get to 320', hooded Hole!

170' OF 3/4" Plastic Hose - Fasten to top Anode

All Construction Completed

Barrels
(Signature)

GROUND BED LAYOUT SKETCH

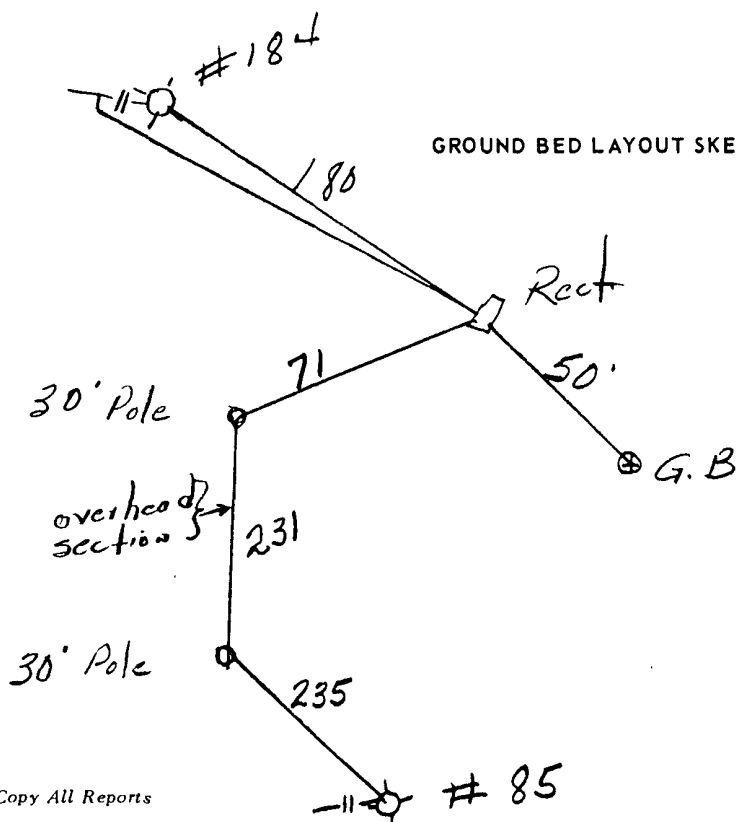

DAILY DRILLING REPORT

LEASE		WELL NO. 1		CONTRACTOR <i>Lee Wilson</i>		RIG NO. 06		REPORT NO.		DATE		19					
MORNING					DAYLIGHT					EVENING							
Driller <i>Denver</i>		Total Men In Crew <i>2</i>			Driller		Total Men In Crew			Driller		Total Men In Crew					
FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.			
0	50	<i>Sandstone</i>			155	165	<i>Water Sand</i>			320	520	<i>Sandy Shale</i>					
50	65	<i>Water Sand</i>			165	210	<i>Shale</i>										
65	130	<i>Shale</i>			210	290	<i>Sand</i>										
130	155	<i>Sand</i>			290	320	<i>Sandy Shale</i>										
BIT NO. <i>3362 X</i>		NO. DC _____ SIZE _____ LENG. _____			BIT NO. <i>10262 X</i>		NO. DC _____ SIZE _____ LENG. _____			BIT NO. <i>30010 X</i>		NO. DC _____ SIZE _____ LENG. _____					
SERIAL NO.		STANDS			SERIAL NO.		STANDS			SERIAL NO.		STANDS					
SIZE		SINGLES			SIZE		SINGLES			SIZE		SINGLES					
TYPE		DOWN ON KELLY			TYPE		DOWN ON KELLY			TYPE		DOWN ON KELLY					
MAKE <i>200'</i>		TOTAL DEPTH			MAKE <i>240'</i>		TOTAL DEPTH			MAKE <i>300' + 20</i>		TOTAL DEPTH					
MUD RECORD			MUD, ADDITIVES USED AND RECEIVED			MUD RECORD			MUD, ADDITIVES USED AND RECEIVED			MUD RECORD			MUD, ADDITIVES USED AND RECEIVED		
Time	Wt.	Vis.				Time	Wt.	Vis.				Time	Wt.	Vis.			
FROM	TO	TIME BREAKDOWN			FROM	TO	TIME BREAKDOWN			FROM	TO	TIME BREAKDOWN					
REMARKS -					REMARKS -					REMARKS -							
<i>9-10-65 Moved to loc. and Drilled 40' with 4 1/2" rig at 5:30 Down from 300 to 430</i>					<i>9-13-65 left yard at 6:00 moved rig at 7:30 Drilled from 40' to 320' with 4 1/2" and Drilled</i>					<i>9-10-65- 3 hrs</i>							
<i>100' with 7 1/2" rig at 5:00</i>					<i>9-14-65 left yard at 6:00 moved rig 7:30 Drilled from 100' to 170' Broke down at 1:00 left</i>					<i>9-13-65- 10 hrs</i>							
<i>rig at 2:00</i>					<i>9-16-65 left yard at 6:00 moved rig 7:30 Drilled from 170' to 320' left rig at 5:00</i>					<i>9-14-65- 6 hrs</i>							
<i>9-17-65 left yard at 6:00 moved rig 7:30 Drilled from 320' to 440' left rig at 5:00</i>					<i>9-21-65 left yard at 6:00 moved rig 7:30 Drilled from 440' to 520' left rig at 3:00</i>					<i>9-16-65- 10 hrs</i>							

SIGNED: Toolpusher

Company Supervisor

Sheet #1 of 2

DAILY DRILLING REPORT

[illegible]

SIGNED: Toolpusher

Company Supervisor