

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS IN
NORTHWEST NEW MEXICO

OPERATOR: Williams Production Company LOCATION: H 20 32 11 LEASE NUMBER: NM-03189

NAME OF WELL/WELLS OR PIPELINE SERVICED: COX CANYON UNIT #009 MV
DUALWELL N/A

30-045-11356

ELEVATION: 6702' GR COMPLETION DATE: 01/20/76 TOTAL DEPTH: 456 ft. LAND TYPE: FED

CASING: 7-5/8" 26.4# K-55 Set @ N/A ft. Casing is not cemented.

CEMENT PLUG--Top:N/A' Bottom: N/A' Used 0 sq. Class "B" (1.18.cu.ft./sk).

WATER DEPTH: 50 ' Water zone thickness not available. WATER DESCRIPTION: Fresh


DEPTH OF GAS: N/A '

COKE: 7992 lbs. of Metalurgical coke breeze used.

NUMBER & TYPE OF ANODES: 10CD TOP ANODE @ 210 ft. BOTTOM ANODE @ 455 ft.

VENT PIPE: 1" PVC Set @ 456 ft. Vent pipe perforated from 190 ft. to 456 ft.

REMARKS: _____

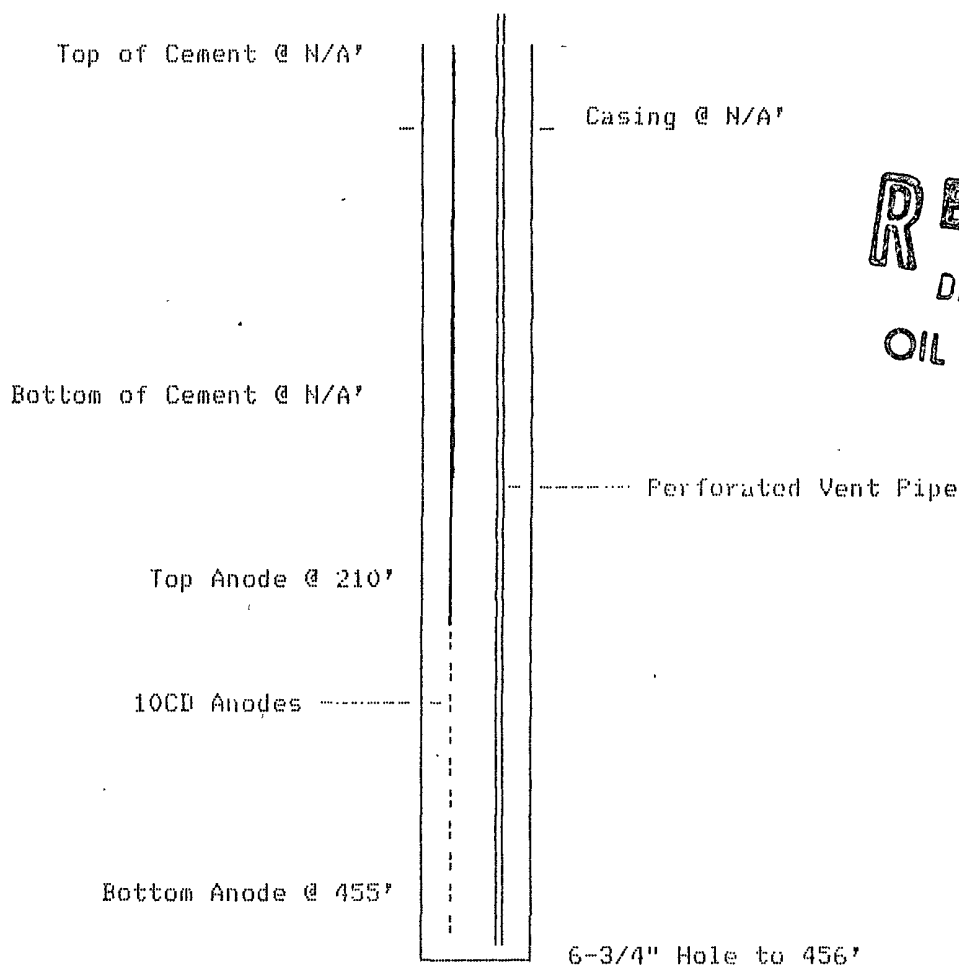

RECEIVED
DEC 11 1991
OIL CON.
DIST



Cox Canyon #9
SHEET NO. _____

JOB NO. 60102

DATE: 11-7-75

SURVEY:

BY: BT

TEST LOCATION		200'	7.1	300'	5.2	400'	5.7	
			4.3		5.1		4.8	#4
		210	4.0	#10	5.9	410	4.8	#4
			4.9		4.8		4.8	
			5.1		6.0	420	3.7	#3
			6.2		6.0		5.2	
			7.5		7.8		6.0	
			13.0		16.0		7.6	
			15.0		19.0		5.8	
			16.0		5.0	445	4.1	#2
		50	22.0	350	3.6	#8	4.3	
			32.0		4.0	455	4.3	#1
			40.0	360	4.2	#7	4.3	TD
			38.0		3.8			456'
			31.0	370	3.7	#6		
			29.0		3.6			
			22.0	380	4.1	#5		
			7.2		4.8			
		290	4.5	#9	5.8			
		95	5.0		6.4			
						500		

NOTES:

.55 Ω C.R.

8000 # Cows



GENERAL
CORROSION
SERVICES

Cox Canyon #9
SHEET NO. _____

JOB NO. 60102

DATE: 11-4-75

SURVEY: _____

BY: BT

TEST LOCATION						
			200	300		
	100		7.5	5.9		
			4.5	6.8		
			5.0	19.0		
			5.4	13.0		
			6.1	6.8		
	25		6.9	8.3		
			9.7	16.0		
			12.0	37.0		
			10.0	6.0		
			20.0	4.5		
	50	21.0	34.0	4.1		
		25.0	36.0	4.3		
		21.0	30.0	4.6		
		18.0	25.0	4.2		
			28.0	4.0		
	75		21.0	4.0		
	1st Log		8.4	4.5		
			5.9	5.0		TD 383
			5.1			
	95		6.2			
			200	300	400	
	100		6.1	5.79	5.3	4
			4.7	9.0	4.9	
			5.2	22.0	5.5	3
			6.0	12.0	5.8	
			6.5	7.4	4.9	2
	25		7.6	8.9	6.1	
			14.0	22.0	6.8	
			11.0	23.0	8.4	
			11.0	5.5	6.3	
			25.0	4.48	4.5	10
	50		32.0	4.4	5.0	
			34.0	4.47	5.5	TD 455'
			25.0	4.4		
			25.0	4.54		
			27.0	4.0		
	75		16.0	4.4	5	
			7.5	4.8		
			5.510	6.4		
			5.5	6.1		
	95		6.1	6.10		

NOTES: _____

