

1318

# 75 30-039-07797

E

# 413 30-039-24159

# 413R 30-039-24396

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS  
NORTHWESTERN NEW MEXICO  
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit K Sec. 23 Twp 30 Rng 7Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #75, #413, #413R

cps 1924w

Elevation 6260' Completion Date 7/29/66 Total Depth 570' Land Type\* N/ACasing, Sizes, Types & Depths N/AIf Casing is cemented, show amounts & types used N/AIf Cement or Bentonite Plugs have been placed, show depths & amounts used  
N/ADepths & thickness of water zones with description of water when possible:  
Fresh, Clear, Salty, Sulphur, Etc. 50' & 100'Depths gas encountered: N/AType & amount of coke breeze used: 10625 lbs.Depths anodes placed: 525', 460', 440', 385', 379', 373', 230', 211', 205', 199'Depths vent pipes placed: 525'Vent pipe perforations: 525'Remarks: gb #2

**RECEIVED**  
MAY 31 1991  
OIL CON. DIV.  
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

\*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.  
If Federal or Indian, add Lease Number.

WELL CASING  
CATHODIC PROTECTION CONSTRUCTION REPORT  
DATE 7-29-66

Date 7-29-66

|                                                      |                                       |                                                                           |                                                                 |                                  |         |
|------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------|-----------------------------------------------------------------|----------------------------------|---------|
| Well Name<br>SJ 306 #75 #413 #415L (WAS McElvain 2A) |                                       |                                                                           |                                                                 | CPS No.<br>157W 1824W            |         |
| Location<br>SW 23-30-7                               |                                       |                                                                           |                                                                 | Work Order No.<br>184-5222-50-20 |         |
| Anode Hole Depth<br>510                              | Total Drilling Rig Time<br>57 1/2 Hrs | Type & Size Bit Used<br>47341 - 190<br>7 3/8 - 22699 - 280 - 703091 - 100 |                                                                 | No. Sacks Mud Used<br>2          |         |
| No. Sacks Lost Circulation Mat'l Used<br>1           | Anode Depth                           |                                                                           |                                                                 |                                  |         |
|                                                      | # 1 525                               | # 2 460                                                                   | # 3 440                                                         | # 4 385                          | # 5 379 |
| Total Lbs. Coke Used<br>10,625                       | Anode Output (Volts)                  |                                                                           |                                                                 |                                  |         |
|                                                      | # 1 2.2                               | # 2 2.8                                                                   | # 3 2.7                                                         | # 4 2.8                          | # 5 3.3 |
| Total Circuit Resistance<br>Volts 12.5               | Amps 12.0                             | Ohms 1.04                                                                 | No. Ft. Surface Cable Conduit<br>3807 Anodes - 235 Surface 4042 |                                  |         |

Drilling Log (Attach Hereto). ☐

Remarks: 3/4" Hose to No. 1 Anode

Perforated opposite Anodes -

15 lbs Phosphate circulated thru G.B.


175 lbs Calcium Chloride added to hole

Intermittently While Coking

All Construction Completed

*Harrell*  
(Signature)

GROUND BED LAYOUT SKETCH

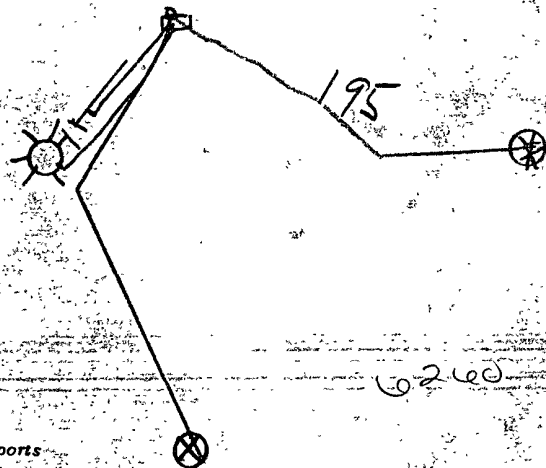

THE UNIVERSITY OF CHICAGO PRESS

RECEIVED

[illegible]

THE UNIVERSITY OF CHICAGO

1998

7-9-99-65

Page of 2