

1473

30-045-24366

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit C Sec. 8 Twp 31 Rng 8Name of Well/Wells or Pipeline Serviced OXNARD #1A


cps 6217w

Elevation N/A Completion Date 12/31/86 Total Depth 500' Land Type* N/ACasing, Sizes, Types & Depths N/AIf Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

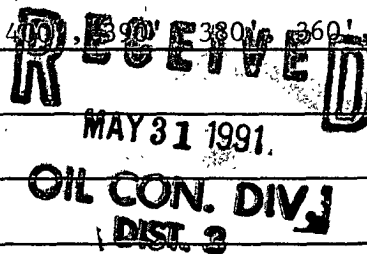Fresh, Clear, Salty, Sulphur, Etc. 300'Depths gas encountered: N/AType & amount of coke breeze used: 2000 lbs.Depths anodes placed: 485', 470', 460', 410', 400', 390', 380', 360', 350', 340'Depths vent pipes placed: 500'Vent pipe perforations: 220'Remarks: (gb #1

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

BURGE CORROSION SYSTEMS, INC.

P.O. BOX 1359 - PHONE 334-6141
AZTEC, NEW MEXICO 87410

Drilling Log (Attach Hereto). ☒ 6217W

Completion Date December 31, 19


Well Name <u>Oxnard #1-A</u>				Location <u>Phillips Texas Petroleum</u>					
Type & Size Bit Used								Work Order No.	
Anode Hole Depth <u>500</u>		Total Drilling Rig Time <u>10</u>		Total Lbs. Coke Used <u>2000#</u>		Lost Circulation Mat'l Used		No. Sacks Mud Used	
Anode Depth	#1 <u>485</u>	#2 <u>470</u>	#3 <u>460</u>	#4 <u>410</u>	#5 <u>400</u>	#6 <u>390</u>	#7 <u>380</u>	#8 <u>360</u>	#9 <u>350</u>
Anode Output (Amps)	#1 <u>2.3</u>	#2 <u>3.4</u>	#3 <u>3.8</u>	#4 <u>3.0</u>	#5 <u>3.1</u>	#6 <u>3.8</u>	#7 <u>3.4</u>	#8 <u>2.3</u>	#9 <u>2.7</u>
Anode Depth	#11	#12	#13	#14	#15	#16	#17	#18	#19
Anode Output (Amps)	#11	#12	#13	#14	#15	#16	#17	#18	#19
Total Circuit Resistance						No. 8 C.P. Cable Used		No. 2 C.P. Cable Used	
Volts <u>11.7</u>	Amps <u>14.0</u>	Ohms <u>34</u>			<u>4230'</u>				

Remarks: Had to fill hole w/water to log. Used 500' of 1" vent pipe with 220' of perforations.

All Construction Completed

Cody Munkres
(Signature)

GROUND BED LAYOUT SKETCH

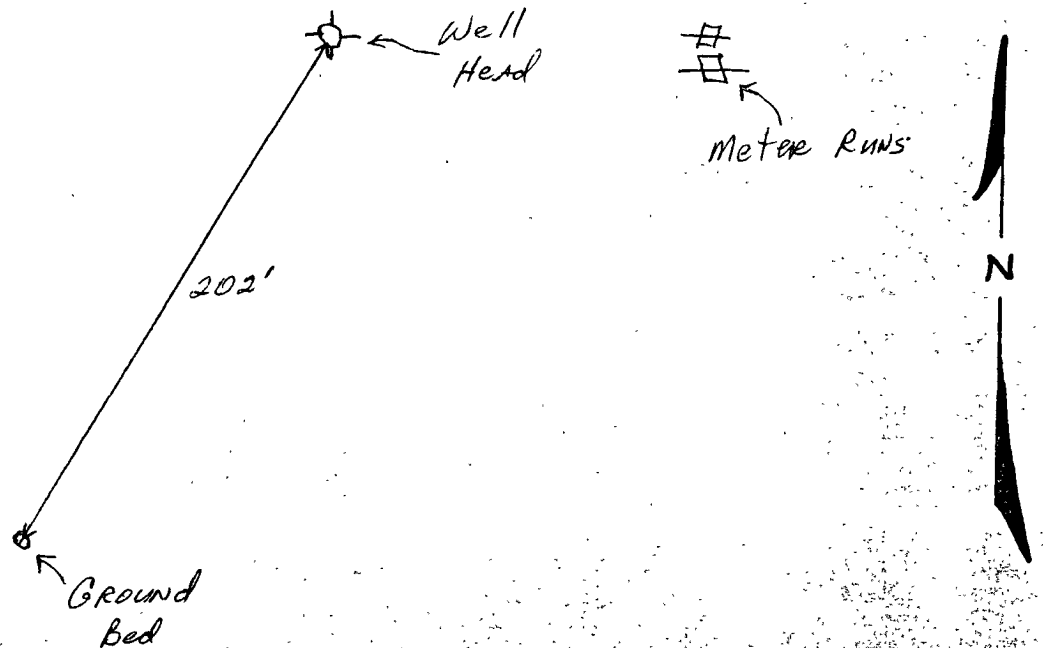

COMPANY Union Texas Petroleum **DAILY DRILLING REPORT** December 31 1986

WATER AT	FEET	HOLE MADE:
300'		500'

[illegible]

REMARKS:

REMARKS: Water volume was very small. Had to go to injection at 300'

Driller

Tool Dresser