

30-045-21608

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit L Sec. 25 Twp 31 Rng 14

Name of Well/Wells or Pipeline Serviced PINON MESA B #1

cps 2035w

Elevation 5616' Completion Date 11/8/88 Total Depth 360' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 45' & 150' NO SAMPLE

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 320', 290', 250', 220', 210', 190', 175', 160', 135', 105'

Depths vent pipes placed: 356'

Vent pipe perforations: 320'

Remarks: gb #1

RECEIVED
MAY 31 1991

ON. DIV.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Drilling Log (Attach Here) ☐

Completion Date 11/8/88

CPS #	Well Name, Line or Plant	Work Order #	Static	Ins Union Check
2035W	PINON MESA B-1	45098A	.72V 600'S	☒ Good ☐ Bad
Location L-25-31-14	Anode Size 2" X 60"	Anode Type DURATION	Size Bit 6 3/4"	
Depth Drilled 360'	Depth Logged 356'	Drilling Rig Time	Total Lbs. Coke Used	Lost Circulation Mat'l Used
Anode Depth #1 320'	#2 290'	#3 250'	#4 220'	#5 210'
#6 190'	#7 175'	#8 160'	#9 135'	#10 105'
Anode Output (Amps) #1 4.9	#2 4.6	#3 4.8	#4 4.1	#5 4.8
#6 4.5	#7 4.7	#8 4.8	#9 4.8	#10 4.4
Anode Depth #11	#12	#13	#14	#15
#16	#17	#18	#19	#20
Anode Output (Amps) #11	#12	#13	#14	#15
#16	#17	#18	#19	#20
Total Circuit Resistance Volts 12.06	Amps 26.1	Ohms .46	No. 8 C.P. Cable Used	No. 2 C.P. Cable Used

Remarks: WATER AT 45 & 150', TOOK WATER SAMPLE, WOULD NOT SETTLE OUT
INSTALLED 356' OF 1" P.V.C. VENT PIPE, PERFORATED 320'
LAYED 1/2" FUEL GAS LINE IN WIRE DITCH.

6.B 4170.00
Rectifier Size: T.R.G. V A 2695.00
Addn'l Depth: ~~0~~
Depth Credit: ~~144' 3.30~~ - 504.00 V
Extra Cable: 215' 25 53.75 V
Ditch & 1 Cable: 195' 75 146.25 V
25' Meter Pole: ~~0~~
20' Meter Pole: ~~0~~
10' Stub Pole: ~~0~~
JCT. BOX 249.00


All Construction Completed

JE Stallo
(Signature)

GROUND BED LAYOUT SKETCH

11810.00 V
TAX 590.50 V
TOTAL \$12400.50

Sketch

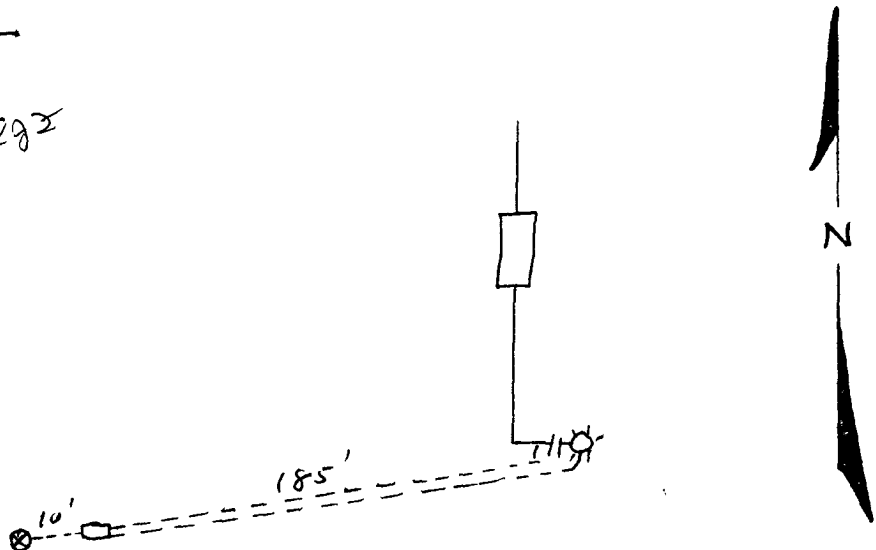

D. CRASS DRILLING CO.

Drill No. 3

DRILLER'S WELL LOG

S. P. No. PINON Mesa #81 Date 11-8-88
Client Meridian Oil Co. Prospect _____
County SAN JUAN State New Mex.

If hole is a redrill or if moved from original staked position show distance
and direction moved: _____

FROM	TO	FORMATION — COLOR — HARDNESS
0	30	SANDSTONE
30	40	SHALE
40	45	SAND ✓
45	140	SHALE
140	150	SAND
150	220	SHALE
220	230	SAND
230	240	SHALE
240	250	SAND
250	320	SHALE
320	360	SANDY SHALE

Mud _____ Bran _____ Lime _____

Rock Bit Number _____ Make _____

Remarks: Water @ 45 & 150'

Driller RONNIE BROWN