

1532

E

#1 30-045-11489

#100 30-045-26957

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit M Sec. 9 Twp 32 Rng 10Name of Well/Wells or Pipeline Serviced BROWN #1, #100

cps 2100w

Elevation 6781' Completion Date 3/10/89 Total Depth 500' Land Type* N/ACasing, Sizes, Types & Depths N/AIf Casing is cemented, show amounts & types used N/AIf Cement or Bentonite Plugs have been placed, show depths & amounts used
N/ADepths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. DAMP AT 250'Depths gas encountered: N/AType & amount of coke breeze used: N/ADepths anodes placed: 465', 405', 395', 385', 375', 345', 308', 299', 290', 281'Depths vent pipes placed: 500'Vent pipe perforations: 300'Remarks: (gb #2)RECEIVED
MAY 21 1991OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHOLIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Drilling Log (Attach Hereto) ☒Completion Date 3-10-89

CPS #	Well Name, Line or Plant:	Work Order #	Static:	Ins. Union Check
2100-W	Brown #100	350-4A	600' w = .64	☒ Good ☐ Bad
Location:	Anode Size:	Anode Type:	Size Bit:	
M9-32-10	2" x 60"	Duriron	6 3/4"	
Depth Drilled	Depth Logged	Drilling Rig Time	Total Lbs. Goke Used	Loss Circulation Mat'l Used
500'	495'			
Anode Depth				
# 1 465'	# 2 405'	# 3 395'	# 4 385'	# 5 375'
# 6 345'	# 7 308'	# 8 299'	# 9 290'	# 10 281'
Anode Output (Amps)				
# 1 2.5	# 2 3.1	# 3 3.5	# 4 3.6	# 5 2.9
# 6 2.8	# 7 2.4	# 8 3.6	# 9 4.0	# 10 2.5
Anode Depth				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Anode Output (Amps)				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Total Circuit Resistance	No. 8 C.P. Cable Used		No. 2 C.P. Cable Used	
Volts 12.1	Amps 13.9	Ohms 871		


Remarks: DRILLED 500' LOGGED 495'. DRILLER SAID DAMP AT 250'. INSTALLED 500' OF 1" PVC VENT PIPE, PERFORATED BOTTOM 300'

Flow 45' NEGATIVE TO METER RUN OUTLET IF SET
Flow AC FROM 69S-W

Rectifier Size: 40 v 16 A
 Addn'l Depth: _____
 Depth Credit: 5' 5.75
 Extra Cable: 485' .20
 Ditch & 1 Cable: 510' .70
 25' Meter Pole: _____
 20' Meter Pole: _____
 10' Stub Pole: 1
 Junction Box: 1

All Construction Completed

M. J. Williams
(Signature)

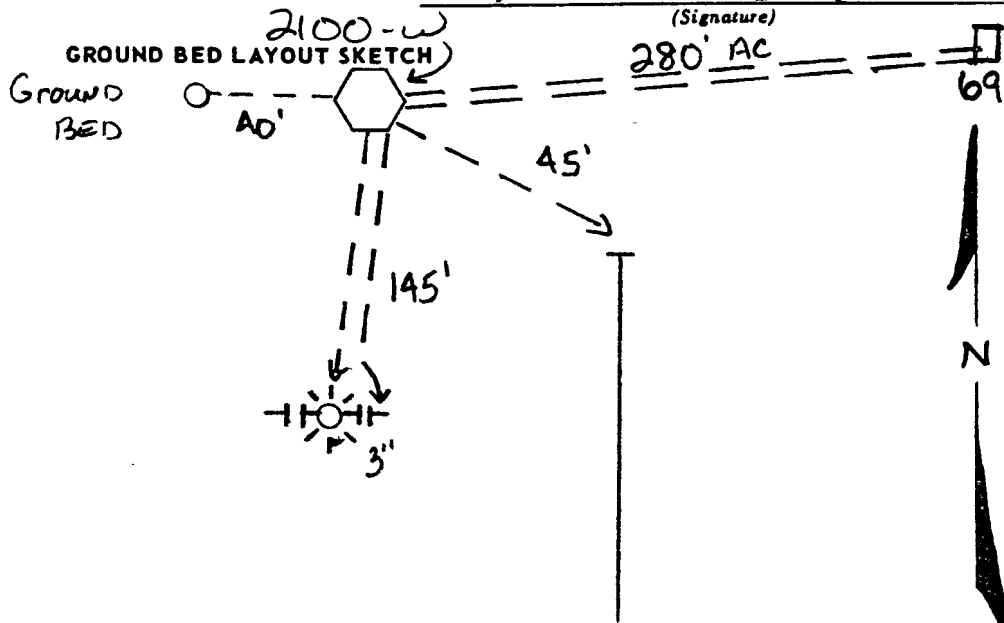

3,870.00
 599.00
 - 18.75 ✓
 97.00 ✓
 357.00 ✓
 144.50 ✓
 237.00
 5285.75
 264.29
 5550.04 *ok 9*

~~FIN 81-0400695~~