

A#2A 30-045-26713
A#4 30-045-07106
A#8 30-045-21557

3894

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit 0 Sec. 26 Twp 28 Rng 9

Name of Well/Wells or Pipeline Serviced HANCOCK A #2A, #4, #8

cps 195lw

Elevation 5955' Completion Date 5/20/88 Total Depth 400' Land Type* N/A

Casing, Sizes, Types & Depths 40' OF 8" PVC SURFACE CASING

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 40' NO SAMPLE

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 325', 315', 305', 295', 260', 250', 240', 205', 190', 150'

Depths vent pipes placed: 385'

Vent pipe perforations: 360'

Remarks: gb #1

RECEIVED

MAY 31 1991

OIL CON. DIV

DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Drilling Log (Attach Hereto) ☐Completion Date 5/29/88

CPS #	Well Name, Line or Plant	Work Order #	Size	Ins. Union Chart
1951W	HAUCCOCK - A-2A	54041A		☐ Good ☒ Bad
	8	2054041A		
Location	Anode Size	Anode Type	Size Bar	
0-26-26-9	2" X 60"	DURION	6 3/4"	
Depth Drilled	Depth Logged	Drilling Rig Time	Total Lbs. Coke Used	Low Calculation Mat'l Used
400	385			
Anode Depth				
#1 325	#2 315	#3 305	#4 295	#5 260
#6 250	#7 240	#8 205	#9 190	#10 15
Anode Output (Amps)				
#1 6.6	#2 6.7	#3 6.9	#4 6.6	#5 6.0
#6 6.6	#7 6.4	#8 6.1	#9 5.8	#10 5.8
Anode Depth				
#11	#12	#13	#14	#15
#16	#17	#18	#19	#20
Anode Output (Amps)				
#11	#12	#13	#14	#15
#16	#17	#18	#19	#20
Total Circuit Resistance				
Volts 11.8	Amps 33.3	Ohms 35	No. 8 C.P. Cable Used	No. 2 C.P. Cable Used

Remarks: WATER AT 40' WOULD NOT SETTLE OUT FOR WATER SAMPLE
INSTALLED 40' of 8" P.V.C. CASING, 2 Hr. SETTING TIME. INSTALLED 385'
of 1" P.V.C. VENT pipe, perforated 360'.

We need TO INSTALL 2 INS UNIONS AT WELL HEAD

G.B. #407400 ✓

Rectifier Size: 40V 16A 669.00 ✓

Add'l. Depth

Depth Credit: -115 -402.50 ✓

Extra Cable: 190' 45.60 ✓

Ditch & 1 Cable: 410' 287.00 ✓

25' Meter Pole: -

20' Meter Pole: 1 297.00 ✓

10' Stub Pole: -

Junction Box: 1 225.00 ✓

2 Joints of 8" P.V.C. casing 200.00 ✓

2 Hr. setting time 276.00 ✓

5671.10 ✓

TAX 283.56 ✓

5954.66 ✓


2K 250

All Construction Completed

(Signature)

HAUCCOCK
A-5

HAUCCOCK
A-4

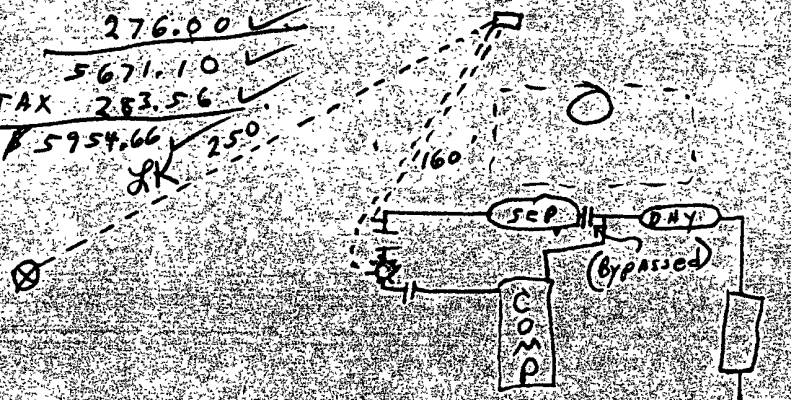

5956

(505) 325-1946

Date: 5/20/88

Company Mexican oil

Well No. HABCOCK A-2A Location O-26-28-9

Volts Applied 11.8 Amperes 31.1

		Volts Applied		Amperes	
5		230	1.8	455	
10		235	2.7	460	
15		240	3.0	465	
20		245	3.1	470	
25		250	3.1	475	
30		255	3.2	480	
35		260	2.9	485	
40	2.5	265	2.7	490	
45	2.7	270	2.6	495	
50	2.6	275	2.3	500	
55	2.5	280	2.3	505	
60	2.9	285	2.5	510	
65	2.9	290	3.0	515	
70	2.8	295	3.1	520	
75	2.7	300	3.1	525	
80	2.8	305	3.1	530	
85	2.4	310	3.2	535	
90	2.0	315	3.0	540	
95	1.6	320	3.1	545	
100	2.2	325	3.1	550	
105	2.6	330	2.9	555	
110	2.4	335	2.9	560	
115	2.4	340	2.8	565	
120	1.9	345	2.7	570	
125	1.6	350	2.9	575	
130	1.2	355	1.5	580	
135	1.3	360	1.4	585	
140	1.4	365	1.4	590	
145	2.9	370	1.2	595	
150	3.2	375	1.4	600	
155	2.9	380	1.2	605	
160	2.8	385		610	
165	2.3	390		615	
170	2.0	395		620	
175	2.1	400		625	
180	2.6	405		630	
185	3.0	410		635	
190	3.0	415		640	
195	2.8	420		645	
200	2.5	425		650	
205	3.0	430		655	
210	2.9	435		660	
215	2.6	440		665	
220	2.3	445		670	
225	1.9	450		675	
					680
					685
					690
					695
					700
					705
					710
					715
					720
					725
					730
					735
					740
					745
					750
					755
					760
					765
					770
					775
					780
					785
					790
					795
					800
					805
					810
					815
					820
					825
					830
					835
					840
					845
					850
					855
					860
					865
					870
					875
					880
					885
					890
					895
					900

D. CRASS

DRILLING CO.

Drill No. 3

1951

DRILLER'S WELL LOG

S. P. No. HANCOCK A-2A Date 5-19-88
Client Meridian Oil Co. Prospect _____
County SAN JUAN State New Mex.

If hole is a redrill or if moved from original staked position show distance
and direction moved: _____

FROM	TO	FORMATION — COLOR — HARDNESS
0	35	SAND
35	70	SANDY shale
70	125	Shale
125	140	SAND
140	210	Shale
210	230	SANDstone
230	390	Shale
390	400	SANDstone

Mud _____ Brm _____ Lime _____

Rock Bit Number _____ Make _____

Remarks: Water @ 40'
Set 40' CASING. 2 Hrs.

Driller RONNIE BROWN