

1532

E

#1 30-045-11489
#100 30-045-26957DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)Operator MERIDIAN OIL INC. Location: Unit M Sec. 9 Twp 32 Rng 10Name of Well/Wells or Pipeline Serviced BROWN #1, #100
cps 2100wElevation 6781' Completion Date 3/10/89 Total Depth 500' Land Type* N/ACasing, Sizes, Types & Depths N/AIf Casing is cemented, show amounts & types used N/AIf Cement or Bentonite Plugs have been placed, show depths & amounts used
N/ADepths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. DAMP AT 250'Depths gas encountered: N/AType & amount of coke breeze used: N/ADepths anodes placed: 465', 405', 395', 385', 375', 345', 308', 299', 290', 281'Depths vent pipes placed: 500'Vent pipe perforations: 300'Remarks: (gb #2)RECEIVED
MAY 21 1991
OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHOLIC PROTECTION CONSTRUCTION REPO.
DAILY LOG

Drilling Log (Attach Hereto) ☒

Completion Date 3-10-89

CPS #	Well Name, Line or Plant	Work Order #	Static:	Ins. Union Check						
2100-W	BROWN #100	3504A	600' W = .64	☒ Good ☐ Bad						
Location: M9-32-10	Anode Size: 2" x 60"	Anode Type: Duriron	Size Bit: 6 3/4"							
Depth Drilled: 500'	Depth Logged: 495'	Drilling Rig Time	Total Lbs. Gels Used	Lost Circulation Mat'l Used						
Anode Depth	#1 465'	#2 405'	#3 395'	#4 385'	#5 375'	#6 345'	#7 308'	#8 299'	#9 290'	#10 281'
Anode Output (Amps)	#1 2.5	#2 3.1	#3 3.5	#4 3.6	#5 2.9	#6 2.8	#7 2.4	#8 3.6	#9 4.0	#10 2.5
Anode Depth	#11	#12	#13	#14	#15	#16	#17	#18	#19	#20
Anode Output (Amps)	#11	#12	#13	#14	#15	#16	#17	#18	#19	#20
Total Circuit Resistance	Volts 12.1	Amps 13.9	Ohms 871	No. 8 C.P. Cable Used	No. 2 C.P. Cable Used					


Remarks: DRILLED 500' LOGGED 495' DRILLER SAID DAMP AT 250'. INSTALLED 500' OF 1" PVC VENT PIPE, PERFORATED BOTTOM 300'

FLOW 45' NEGATIVE TO METER RUN OUTLET IF SET
FLOW AC FROM 69S-W

Rectifier Size: 40 V 16 A
Addn'l Depth _____
Depth Credit: 5' 3.75
Extra Cable: 485' .20
Ditch & 1 Cable: 510' .70
25' Meter Pole: _____
20' Meter Pole: _____
10' Stub Pole: 1
Junction Box: 1

All Construction Completed

M. Sullivan
(Signature)

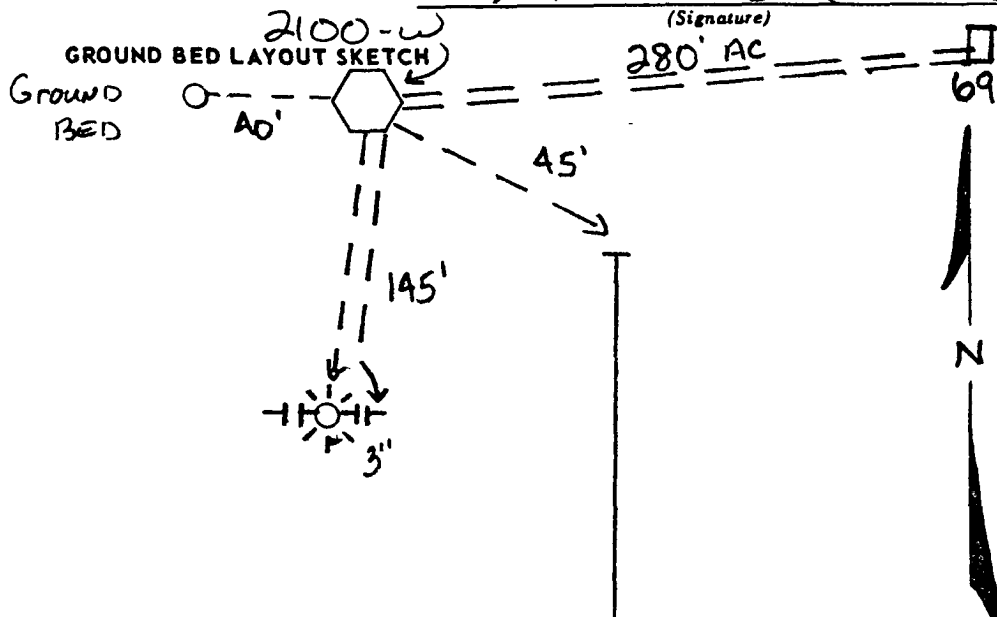

3,870.00
599.00
- 18.75 ✓
97.00 ✓
357.00 ✓
144.50 ✓
237.00
5285.75
264.29
5550.04 OK

(H₂O) (H₂O) (H₂O) (H₂O)

Don Scott

1802 ln 10

Drilling Services For:

Phone; (307) 754-2056

Job Number: CP75-0207-89

Location: _____

Prospect: _____

Manager: _____

Date: _____ to _____

~~Inv # 89-204~~

~~TOTAL INVOICE:~~ ~~NET 30 DAYS~~ ~~FIN 81-0490695~~