

25-30-039-07164

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

84-30-039-07157

Operator MERIDIAN OIL CO. Location: Unit M Sec. 3 Twp. 27 Rng. 5

Name of Well/Wells or Pipeline Serviced SAN JUAN 27-5 # 25 & # 84

Elevation _____ Completion Date 9/26/90 Total Depth 440 Land Type _____

Casing Strings, Sizes, Types & Depths 40 ft. 8" PVC Casing

If Casing Strings are cemented, show amounts & types used _____

If Cement or Bentonite Plugs have been placed, show depths & amounts used _____

Depths & thickness of water zones with description of water: Fresh, Clear,
Salty, Sulphur, Etc. water at 180 ft., got sample

Depths gas encountered: _____

Ground bed depth with type & amount of coke breeze used: _____

410 ft. with 2900 lbs. of Ashbury Petroleum Coke

Depths anodes placed: 395, 385, 375, 365, 355, 325, 315, 305, 295, 285

Depths vent pipes placed: 430 ft. 1" PVC Vent Pipe

Vent pipe perforations: Perforated 250 ft.

Remarks: _____

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included

Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING CATHODIC PROTECTION CONSTRUCTION REPORT DAILY LOG

Drilling Log (Attach Hereto) ☐Completion Date 9-26-90

CPS #	Well Name, Line or Plant:	Work Order #	Static:	Ins. Union Check
737-W	55 27-5 #25 55 27-5 #84			☒ Good ☐ Bad
Location:	Anode Size:	Anode Type:	Size Bit:	
M3-27-5	2" X 60"	ANOTEC	6 3/4	
Depth Drilled	Depth Logged	Drilling Rig Time	Total Lbs. Cable Used	Lost Circulation Mat'l Used
440'	410'		3900 #	
Anode Depth				
# 1 395	# 2 385	# 3 375	# 4 365	# 5 355
# 6 325	# 7 315	# 8 305	# 9 295	# 10 285
Anode Output (Amps)				
# 1 4.2	# 2 4.2	# 3 5.6	# 4 5.3	# 5 5.7
# 6 3.9	# 7 5.3	# 8 5.7	# 9 5.6	# 10 4.5
Anode Depth				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Anode Output (Amps)				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Total Circuit Resistance		No. 8 C.P. Cable Used		No. 2 C.P. Cable Used
Volts 12.2		Amps 14.7		Ohms .82

Remarks: Set 40' of 8" PVC casing. Driller said water at 180'. Blew
water after connection. Got water sample. Ran 430' of 1" PVC vent
pipe. Perforated 250' of vent pipe. Left coke breeze approximate
240'

Rectifier Size: _____ V _____ A
 Addn'l Depth: _____
 Depth Credit: _____
 Extra Cable: 10'
 Ditch & 1 Cable: 24'
 25' Meter Pole: _____
 20' Meter Pole: _____
 10' Stub Pole: _____
 Junction Box: 1

All Construction Completed

William L. Knight Jr.
 (Signature)

GROUND BED LAYOUT SKETCH

C.G.B. #1

27.5 #25

C.G.B. #2

24'

Rectifier

27.5 #84

N

CONSTRUCTION LOGGING READINGS

Meridian 011

CPS #: 737.4 WELL NAME: S527-5²⁵ LOCATION: M3-27-5 DATE: 9-26-90

TOTAL VOLTS: 12.2 TOTAL AMPS: 14.7 OHMS RESISTANCE: .82

												ANODE READINGS			
DEEP	LOG ANODE	ANODE NO.	DEEP	LOG ANODE	ANODE NO.	DEEP	LOG ANODE	ANODE NO.	DEEP	LOG ANODE	ANODE NO.	NO.	DEPTH	NO COKE	WITH COKE
5			185	1.30		365	1.7	4	545			1	325	1.9	4.2
10			190	1.30		370	1.9		550			2	385	1.3	4.2
15			195	1.80		375	1.6	8	555			3	375	2.0	5.6
20			200	1.60		380	1.2		560			4	365	2.0	5.3
25			205	1.0		385	1.3	2	565			5	355	2.1	5.7
30			210	1.2		390	1.2		570			6	325	1.3	3.9
35			215	1.1		395	1.5	1	575			7	315	1.6	5.3
40			220	1.6		400	1.2	1	580			8	305	1.9	5.7
45			225	1.2		405	1.1		585			9	295	1.6	5.6
50			230	1.5		410	1.1	70	590			10	285	1.4	4.5
55			235	1.4		415			595						
60			240	1.80		420			600						
65			245	1.60		425			605						
70			250	1.30		430			610						
75			255	1.30		435			615						
80			260	1.40		440			620						
85			265	1.40		445			625						
90			270	1.30		450			630						
95			275	1.20		455			635						
100			280	1.90		460			640						
105			285	1.3	10	465			645						
110			290	1.3		470			650						
115			295	1.4	9	475			655						
120			300	1.6		480			660						
125			305	1.6	8	485			665						
130			310	1.5		490			670						
135			315	1.5	7	495			675						
140			320	1.3		500			680						
145			325	1.2	6	505			685						
150			330	1.90		510			690						
155			335	1.40		515			695						
160			340	1.20		520			700						
165			345	1.30		525			705						
170			350	1.70		530			710						
175			355	1.2	5	535			715						
180	140		360	1.3		540			720						

REMARKS: Set 40' of 8" PVC casing. Driller said
 water at 180'. Blew water after making connection,
 got water sample.

API WATER ANALYSIS REPORT FORM

Laboratory No. 25-901002-003B

Company MERIDIAN OIL		Sample No. CAS 737-W		Date Sampled 9-26-90	
Field Blanco		Legal Description M3-27-5		County or Parish RIO ARriba	
Lease or Unit		Well SJ. 27-5 # 25		Depth 180'	
Type of Water (Produced, Supply, etc.)		Sampling Point		Water, B/D	
				Sampled By W. Knight Jr.	



TECH, Inc.
333 East Main
Farmington
New Mexico
87401
505/327-3311

DISSOLVED SOLIDS

CATIONS

mg/l

me/l

Sodium, Na (calc.)

Calcium, Ca

Magnesium, Mg

Barium, Ba

ANIONS

Chloride, Cl

Sulfate, SO_4

Carbonate, CO_3

Bicarbonate, HCO_3

OTHER PROPERTIES

pH

Specific Gravity, 60/60 F.

Resistivity (ohm-meters) 71.5 F.


Total Dissolved Solids (calc.)

Iron, Fe (total)

Sulfide, as H_2S

REMARKS & RECOMMENDATIONS: ATTN: M.D. McFarland.

TOO MUCH SUSPENDED SOLID TO ANALYZE

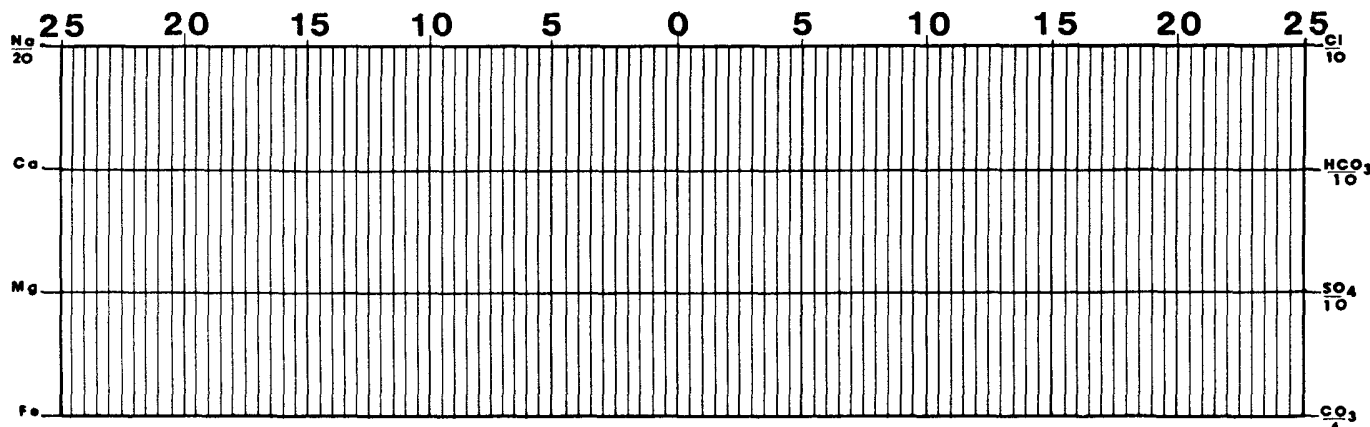

Date Received 2nd Oct, 1990.	Preserved	Date Analyzed 5th Oct, 1990.	Analyzed By R.H.
---------------------------------	-----------	---------------------------------	---------------------