

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS IN
NORTHWEST NEW MEXICO

OPERATOR: Williams Production Company LOCATION: G 19 32 11 LEASE NUMBER: NM-010910

NAME OF WELL/WELLS OR PIPELINE SERVICED: HOLT #001 PC
DUALWELL N/A

30-045 21485

ELEVATION: 6596' GR COMPLETION DATE: 11/22/76 TOTAL DEPTH: 415 ft. LAND TYPE: FED

CASING: 7-5/8" 26.4# K-55 Set @ N/A ft. Casing is not cemented.

CEMENT PLUG--Top:N/A' Bottom: N/A' Used 0 sx. Class "B" (1.18 cu.ft./sk).

WATER DEPTH: 120' Water zone thickness not available. WATER DESCRIPTION: Fresh


DEPTH OF GAS: N/A'

COKE: 7695 lbs. of Metallurgical coke breeze used.

NUMBER & TYPE OF ANODES: 10CD TOP ANODE @ 180 ft. BOTTOM ANODE @ 370 ft.

VENT PIPE: 1" PVC Set @ 415 ft. Vent pipe perforated from 160 ft. to 415 ft.

REMARKS: _____

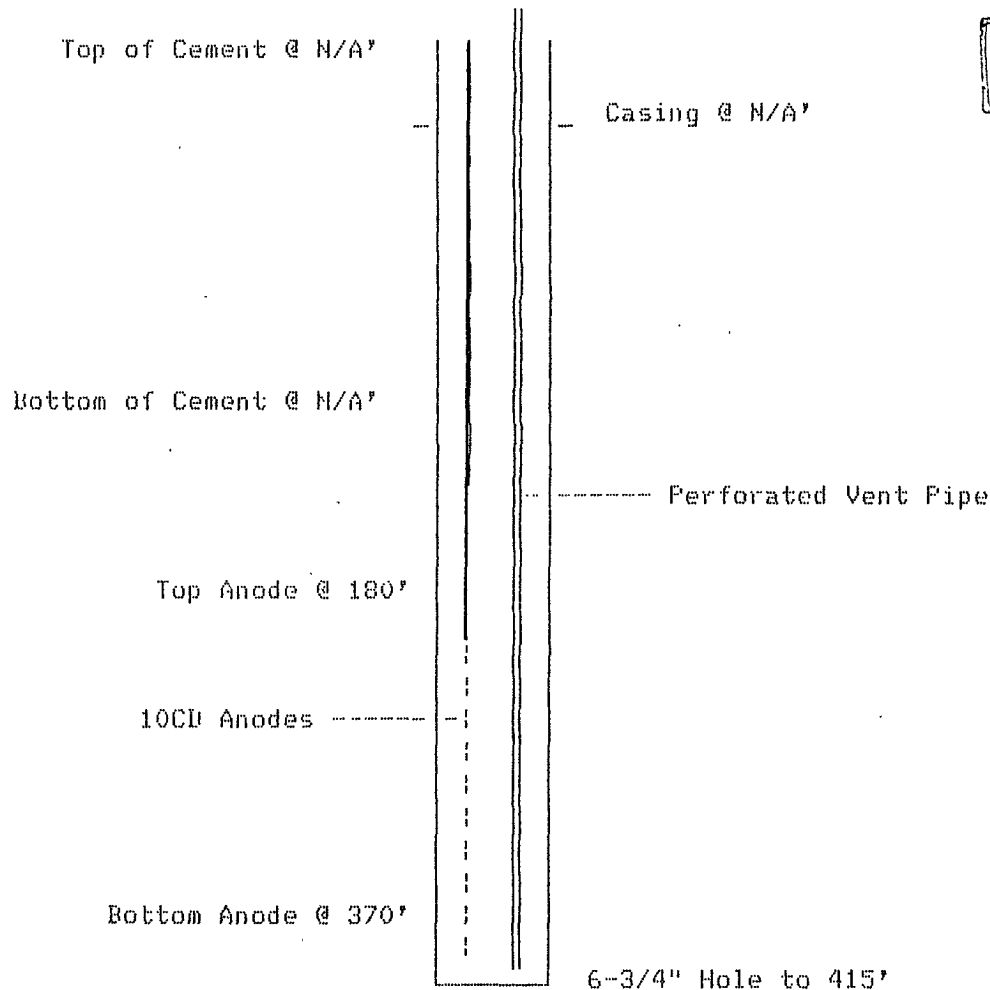

RECEIVED
DEC 11 1991
OIL CON. DIV.
DIST. 3

WELL TYPE GROUND BED DATA

DATA SHEET NO. 1

7617-W

COMPANY Northwest pipeline JOB No. 8913 DATE: 11-22-76WELL: Holt #1 PIPELINE: _____LOCATION: SEC. 19 TWP. 32 RGE. 11 CO. SAN JUAN STATE NEW MEXICO

ELEV. _____ FT: ROTARY _____ FT: CABLE TOOL _____ FT: CASING _____ FT.

GROUNDBED: DEPTH 415 FT. DIA. 6 3/4 IN. GAB 5810 LBS. ANODES 10-CO-251

DEPTH, FT.	DRILLER'S LOG	DRILL PIPE TO STRUCTURE			EXPLORING ANODE TO STRUCTURE			DEPTH, TOP OF ANODES
		E	I	R	E	I	R	
120	120' First water						20.0	
							26.0	
30							14.0	
							10.2	
40							9.4	
							10.6	
50							12.0	
							14.0	
60							36.0	
							16.0	
70							6.7	
							6.4	
80							5.5	180
							6.8	
90							8.8	
							10.8	
200							10.7	
							12.0	
10							15.0	
							13.0	
20							9.7	
							8.3	
30							8.4	
							8.8	
40							10.6	
							11.0	
50							5.7	250
							6.5	
60							5.9	
							5.7	265
70							5.3	
							5.3	275
80							5.4	
							6.6	
90							9.4	
							10.6	
300							10.7	
							8.0	
10							6.1	2710
							5.1	
20							4.6	320
							5.6	
30							5.5	

GROUNDBED RESISTANCE: (1) VOLTS _____ + AMPS _____ = _____ OHMS

(2) VIBROGROUND .65 OHMS

cathodic protection service

DATA SHEET NO. 2[illegible]

(2) VIBROGROUND 65 OHMS

