

#1 30-045-09449
#7 30-045-20846
#215 30-045-27075

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit M Sec. 15 Twp 30 Rng. 10

Name of Well/Wells or Pipeline Serviced SUNRAY B #1, #7, #215

cps 2068w

Elevation 6344' Completion Date 1/9/89 Total Depth 320' Land Type* N/A

Casing, Sizes, Types & Depths 40' CASING

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 120' NO SAMPLE

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 280', 260', 250', 230', 220', 210', 170', 160', 150', 140'

Depths vent pipes placed: 325'

Vent pipe perforations: 220'

Remarks: gb #3

RECEIVED

MAY 31 1991

OIL CON. DIV

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Comp 1-11-89

Drilling Log (Attach Hereto) ☒

Completion Date 1-9-89

CPS #	Well Name, Line or Plant	Work Order #	Static	In. Union Check
2068-w	SUNRAY "B" # 215	3411A		☒ Good ☒ Bad
Location: M15-30-10		Anode Size: 2" x 60"	Anode Type: Duriron	Size Bit: 6 3/4"
Depth Drilled: 320'	Depth Logged: 320'	Drilling Rig Time	Total Lbs. Coke Used	Lost Circulation Mat'l Used
No. Sacks Mud Used				
Anode Depth				
# 1 280'	# 2 260'	# 3 250'	# 4 230'	# 5 220'
# 6 210'	# 7 170'	# 8 160'	# 9 150'	# 10 140'
Anode Output (Amps)				
# 1 3.5	# 2 4.3	# 3 4.8	# 4 4.2	# 5 4.9
# 6 4.2	# 7 4.6	# 8 5.0	# 9 4.5	# 10 3.8
Anode Depth				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Anode Output (Amps)				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Total Circuit Resistance		No. 8 C.P. Cable Used		No. 2 C.P. Cable Used
Volts 11.8	Amps 19.2	Ohms .614		

Remarks: DRILLED 320; LOGGED 320'. DRILLER SAID WATER AT 120', NO SAMPLE. INSTALLED 325' of 1" PVC VENT pipe, PERFORATED BOTTOM 220'

* CAN TIE AC INTO EXISTING RECTIFIER 207-W. WILL NEED BREAKER BOX FOR 207-W

Rectifier Size: 40 V 16 A

Addn'l Depth_

Depth Credit: 180' 3.50

Extra Cable: 630' .24

Ditch & 1 Cable: 535' .70

25 'Meter Pole:_____

20' Meter Pole: _____

10' Stub Pole: 1

JUNCTION BOX: 1

CASING TIME: 2.5 hrs

All Construction Completed


M. R. L.

(Signature)

WELL IS
NOT TIED IN
YET

207-0

GROUND BED LAYOUT SKETCH

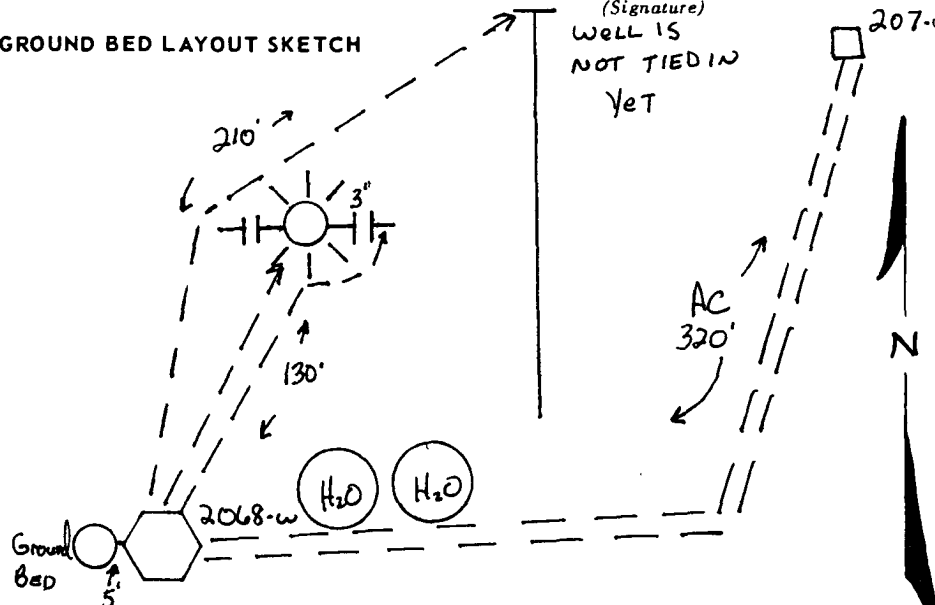

4,074.00

669.00 RECT.

-630.00 CREDIT ✓

151.20 ex. CABLE ✓

324.50 DITCH + 1 ✓

158.50 STUB

225.00 J. Box

345.00 CASING

5367.20

268.36 TAX

5635.560197

4344

D. CRASS DRILLING CO.

Drill No. 3

DRILLER'S WELL LOG

S. P. No. SUNRAY B #215 Date 1-9-89
Client Meridian Oil Co. Prospect _____
County SAN JUAN State New Mex.

If hole is a redrill or if moved from original staked position show distance and direction moved: _____

FROM	TO	FORMATION — COLOR — HARDNESS
0	120	SAND
120	150	SANDY SHALE
150	180	SHALE
180	210	SANDSTONE
210	260	SHALE
260	320	SANDY SHALE

Mud _____ Brn _____ Lime _____

Rock Bit Number _____ Make _____

Remarks: 40' CASING 2.5 Hrs.
Water @ 120'

Driller RONNIE BROWN