

107-30-039-60093

174-30-039-06952

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator Union Oil Company of California Location: Unit Sec. 19 Twp 27N Rng 6WName of Well/Wells or Pipeline Serviced Rincon Unit #107 MV & Rincon Unit #174 DKElevation 6592' Completion Date 10/22/1965 Total Depth 360' Land Type* FCasing, Sizes, Types & Depths NoneIf Casing is cemented, show amounts & types used None

If Cement or Bentonite Plugs have been placed, show depths & amounts used

None

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. Water 105'Depths gas encountered: NAType & amount of coke breeze used: 6840 lbsDepths anodes placed: 240'Depths vent pipes placed: ?Vent pipe perforations: ?Remarks: El Paso Natural Gas was operator when this ground bed was installed.This was first ground bed installed on this location.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

RECEIVED
MAY 2 1966
OIL CON. DIV.
DET. 3

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

11

4 3/4" DRAG BIT - 120' # 2

Date 10-22-65

Well Name RINCON #107 & RINCON #174			CPS No. 687W		
Location SW 19-27-6			Work Order No. 184-33444-50-20 184-54265-50-20		
Anode Hole Depth 360'	Total Drilling Rig Time 24 hrs	Type & Size Bit Used 4 3/4" DRAG BIT # 40010 - 160' 4 3/4" DRAG BIT # 10123 - 80'	No. Sacks Mud Used 1		
No. Sacks Lost Circulation Mat'l Used 0	Anode Depth, ft #1 360 #2 155 #3 175 #4 154 #5 148 #6 112				
Total Lbs. Coke Used 6840 lbs	Anode Output (Volts) #1 3.5 #2 3.0 #3 3.5 #4 4.4 #5 3.8 #6 4.0				
Total Circuit Resistance Volts 11.2	Amps 9.8	Ohms 1.14	No. Ft. Surface Cable Conduit 1105'		


Drilling Log (Attach Hereto). ☐

Remarks: STATES (H174) 600' west - 166' + 20' 600' west - 166'
Installed a 30V D.C. 3 NEA Terminal Rectifier.
Used 1652' of cable (18 strands) in Sand Bed

All Construction Completed

Ernest Phelps
(Signature)

GROUND BED LAYOUT SKETCH

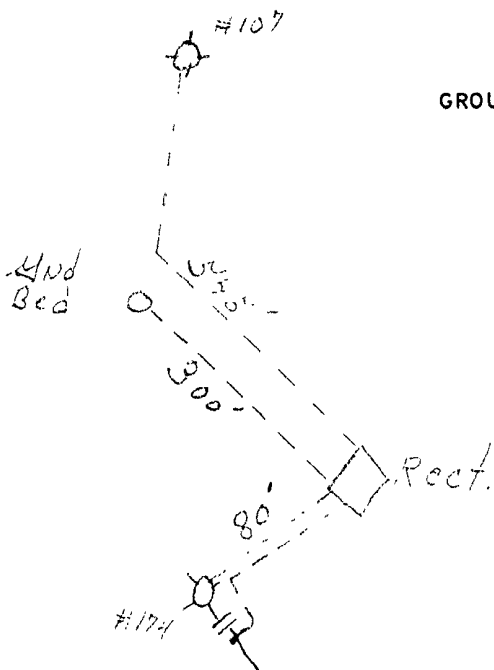

2757' 18 W, 18 E

N

1967

EVENING

Company Supervisor