

1334

E


11-A 30-045-23288

108 30-045-27003

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SE Sec. 23 Twp 32 Rng 7Name of Well/Wells or Pipeline Serviced ALLISON UNIT #11A, #108

cps 1658w

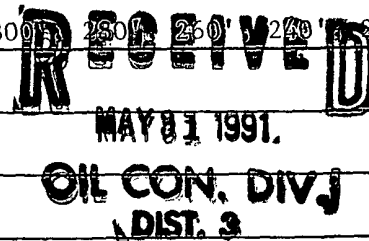Elevation 6549' Completion Date 9/1/83 Total Depth 440' Land Type* N/ACasing, Sizes, Types & Depths N/AIf Casing is cemented, show amounts & types used N/AIf Cement or Bentonite Plugs have been placed, show depths & amounts used
N/ADepths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. WATER SAND 80' - 100'Depths gas encountered: N/AType & amount of coke breeze used: 4400 lbs.Depths anodes placed: 405', 385', 365', 345', 320', 300', 280', 260', 240', 320'Depths vent pipes placed: 440'Vent pipe perforations: 360'Remarks: gb #1

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Drilling Log (Attach Hereto) ☐Completion Date 9/1/83CPS # 1658W Well Name, Line or Plant: ALLISON/11A Work Order # 57604 Static: 181 Ins Union Check

				☒ Good ☐ Bad
--	--	--	--	---

Location: <u>SE 23-32-7</u>	Anode Size: <u>2" x 60"</u>	Anode Type: <u>DURIRON</u>	Size Bit: <u>6 3/4"</u>
-----------------------------	-----------------------------	----------------------------	-------------------------

Depth Drilled: <u>440'</u>	Depth Logged: <u>436'</u>	Drilling Rig Time	Total Lbs Goke Used: <u>4400</u>	Lost Circulation Mat'l Used	No. Sacks Mud Used
----------------------------	---------------------------	-------------------	----------------------------------	-----------------------------	--------------------

Anode Depth	# 1 <u>405</u>	# 2 <u>385</u>	# 3 <u>365</u>	# 4 <u>345</u>	# 5 <u>320</u>	# 6 <u>300</u>	# 7 <u>280</u>	# 8 <u>260</u>	# 9 <u>240</u>	# 10 <u>220</u>
-------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	-----------------

Anode Output (Amps)	# 1 <u>237</u>	# 2 <u>325</u>	# 3 <u>325</u>	# 4 <u>345</u>	# 5 <u>350</u>	# 6 <u>300</u>	# 7 <u>290</u>	# 8 <u>305</u>	# 9 <u>370</u>	# 10 <u>365</u>
---------------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	-----------------

Anode Depth	# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20
-------------	------	------	------	------	------	------	------	------	------	------

Anode Output (Amps)	# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20
---------------------	------	------	------	------	------	------	------	------	------	------

Total Circuit Resistance	Volts <u>12.64</u>	Amps <u>15.4</u>	Ohms <u>.82</u>	No. 8 C.P. Cable Used	No. 2 C.P. Cable Used
--------------------------	--------------------	------------------	-----------------	-----------------------	-----------------------

Remarks: Drilled to 240' water sand 80-100'. Set over night
blow water next AM. Sample too muddy. 80' plan
vent pipe balance perforated. Filled hole thru
drill pipe. Logged & loaded.

Rectifier Size: 40 V 16 A

Addn'l Depth


Depth Credit: ~~64'~~ - 64' ✓Extra Cable: 165' ✓Ditch & 1 Cable: 210' ✓

25' Meter Pole:

20' Meter Pole: X

10' Stub Pole:


All Construction Completed



(Signature)

GROUND BED LAYOUT SKETCH

TIME		
DATE	REG	OT
<u>9-1</u>	<u>8</u>	<u>3</u>

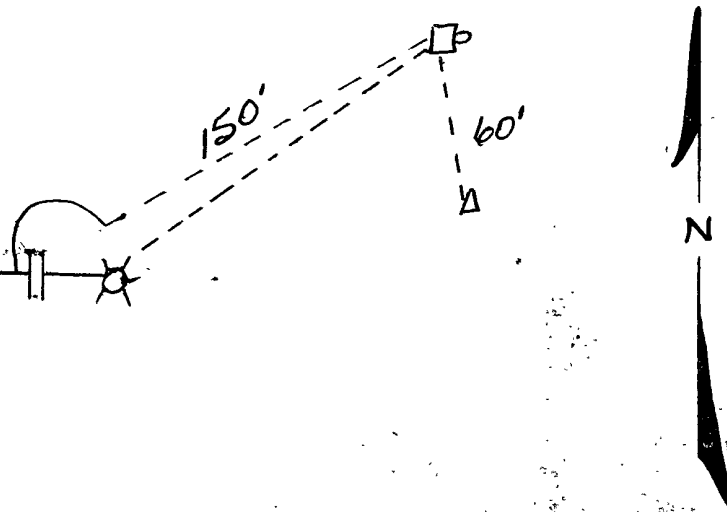

WELL NO. 211A CONTRACTOR SK Drilling RIG NO. 3 REPORT NO. 1658 DATE 8-831 1983
EASE.

SIGNED: Bobby Sanderson _____
Toolpusher _____
Company Supervisor Tom I. Ford

SIGNED: Toolpusher

Company Supervisor

