District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W Grand Ave , Artesia, NM 88210

District III

1000 R10 Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico **Energy Minerals and Natural Resources**

Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

June 16, 2008 For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office.

Form C-144

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Closed-Loop System, Below-Grade Tank, or

Proposed Alternative Method Per	mit or Closure Plan Application
Type of action: X Permit of a pit, closed-loop system	n, below-grade tank, or proposed alternative method
Closure of a pit, closed-loop system Instructions: Please submit one application (Form C-144) per individual.	m, below-grade tank, or proposed alternative method 181920
Please be advised that approval of this request does not relieve the operator of habit environment. Not does approval relieve the operator of its responsibility to comply with the complex of the operator of the responsibility to comply with the operator of the operator	the any other applicable governmental authority's rules, routhstions a result in pollution of surface water or the the any other applicable governmental authority's rules, routhstions a result and the property of the any other applicable governmental authority's rules, routhstions and the property of the any other applicable governmental authority's rules, routhstions are related to the property of the property
Operator: Burlington Resources Oil & Gas Company, LP	OGRID#: 14538 - EMAR 118
Address: PO Box 4289, Farmington, NM 87499	OIL CONS. DIV. DIST. 3
Facility or well name: San Juan 28-5 Unit #60	OIL GOING. SIM
	CD Permit Number:
U/L or Qtr/Qtr: A(NENE) Section: 29 Township: 28N	Range: 5W County: Rio Arriba
	Al Trust or Indian Allotment NAD: X 1927 1983
Surface Switch. A Federal State Filivate Military	T
Pit: Subsection F or G of 19.15.17.11 NMAC	X Closed-loop Systems: Subsection H of 19.15.17.11 NMAC
Temporary: Drilling Workover	Drying Pad X Tanks Haul-off Bins Other:
Permanent Emergency Cavitation	Lined Unlined
Liner type: Thickness milLLDPEHDPEPVC	Liner type: Thickness mil LLDPE HDPE PVCOther:
Other String-Reinforced	Seams: Welded Factory Other:
Seams: Welded Factory Other	Volume: 500 bbl 104 yd3
Volume: bbl Dimensions: L xW xD	Dimernsions: Length 45' x Width 10'
Below-grade tank: Subsection I of 19.15.17 11 NMAC	Fencing: Subsection D of 19.15.17 11 NMAC
Volume:bbl	Chain link, six feet in height, two strangs of barbed wire at top
Type of fluid:	Four foot height, four strands of barbed wire evenly spaced between
Tank Construction Material:	one and four feet
Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off	Netting: Subsection E of 19.15.17.11
Visible sidewalls and liner	Screen Netting Other Monthly inspections
Visible sidewalls only	Signs: Subsection C of 19.15.17 11 NMAC
Other:	12"x 24", 2" lettering, provided Operator's name, site location, and
Liner type: Thickness:mil HDPE PVC	emergency telephone numbers
Other:	X Signed in compliance with 19.15.3.103 NMAC
Alternative Method:	Administrative Approvals and Exceptions:
Submittal of an exception request is required. Exceptions must be	Justifications and/or demonstrations of equivalency are required. Please
submitted to the Santa Fe Environmental Bureau office for consideration	refer to 19.15.17 NMAC for guidance.
of approval.	Please check a box if one or more of the following is requested, if not leave blank:
	Administrative approval(s): Requests must be submitted to the
	appropriate division district or the Santa Fe Environmental Bureau office for consideration of approval. (Fencing in Design Plan)
	Exception(s): Requests must be submitted to the Santa Fe
	Environmental Bureau office for consideration of approval.

Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.					
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	□Yes	□No			
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	□Yes	□No			
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	□No			
(Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	□NA				
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	□No			
(Applied to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	□NA				
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	□Yes	□No			
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site.					
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	Yes	□No			
- Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland.	Yes	□No			
- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine.					
- Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	∐Yes	∐No			
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	Yes	□No			
Within a 100-year floodplain	∏Yes	□No			
- FEMA map					
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC					
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the d	ocuments ar	e attached.			
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Operating and Maintence Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC					
Previously Approved Design (attach copy of API Number: or Permit					
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.					
Geologic and Hydrogeologic Data (required for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (required for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC					
X Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC X Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC					
Previously Approved Design (attach copy of API Number:					

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC					
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are att	tached.				
Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15.17.9 NMAC					
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC					
Climatological Factors Assessment					
Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC					
Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC					
Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC					
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC					
Quality Control/Quality Assurance Construction and Installation Plan					
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC					
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC					
Nuisance or Hazardous Odors, including H2S, Prevention Plan					
Emergency Response Plan					
Oil Field Waste Stream Characterization					
Monitoring and Inspection Plan					
Erosion Control Plan					
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC					
Proposed Closure: 19.15.17.13 NMAC					
Type: Drilling Workover Emergency Cavitation Permanent Pit Below-grade Tank X Closed-loop System Altern	native				
Proposed Closure X Waste Excavation and Removal					
On-site Closure Method (only for temporary pits and closed-loop					
☐ In-place ☐ On-site Trench					
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau f	or				
	01				
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC					
Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommentations of acceptable source	ı				
	l .				
materiui are providea delow. Requests regarding changes to certain string criteria may require administrative approval from the appropriate					
material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of					
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.					
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste.	∐Yes ∏No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	∏Yes ∏No ∏NA				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste	□NA □Yes □No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	□NA □				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste.	□NA □Yes □No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	NA Yes No NA Yes No NA NO				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste.	NA				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	NA Yes No NA Yes No NA NO				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	NA Yes No NA Yes No NA NO				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial	NA Yes No NA Yes No NA NO				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	NA Yes No NA Yes No NA Yes No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic	NA Yes No NA Yes No NA Yes No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time	NA				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	NA				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time	NA				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	NA				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	NA Yes No NA Yes No NA Yes No Yes No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Buraui office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells. Ground water is between 50 and 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells. Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells. Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site. Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image. Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site. Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal	NA Yes No NA Yes No NA Yes No Yes No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	NA Yes No NA Yes No NA Yes No Yes No Yes No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Written confirmation or verification from the municipality; Written approval obtained from the municipality	NA Yes No NA Yes No NA Yes No Yes No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland.	NA Yes No NA Yes No NA Yes No Yes No Yes No Yes No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Witten confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland.	NA Yes No NA Yes No NA Yes No Yes No Yes No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes,or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Witten confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland. proposed site Witten confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	NA Yes No NA Yes No NA Yes No Yes No Yes No Yes No Yes No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Within 500 feet of a wetland. Proposed site Within the area overlying a subsurface mine. Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	NA Yes No NA Yes No NA Yes No Yes No Yes No Yes No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is nore than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Within 500 feet of a wetland. Proposed site Within the area overlying a subsurface mine. Within the area overlying a subsurface mine. Regiment of Geology & Mineral Resources; USGS; NM	NA Yes No NA Yes No NA Yes No Yes No Yes No Yes No Yes No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Within 500 feet of a wetland. Proposed site Within the area overlying a subsurface mine. Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	NA Yes No NA Yes No NA Yes No Yes No Yes No Yes No Yes No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Within 500 feet of a wetland. Proposed site Within the area overlying a subsurface mine. Within the area overlying a subsurface mine. Regimental Resources; USGS; NM	NA Yes No NA Yes No NA Yes No Yes No Yes No Yes No Yes No				

Waste Excavation and Removal Closure Plan Checklist: (19 15 17.13 NM	
to the closure plan. Please indicfate, by a check mark in the box, that the documents are a X Protocols and Procedures - based upon the appropriate requirements of	
Confirantion Sampling Plan (if applicable) - based upon the appropriate	
X Disposal Facility Name and Permit Number (for liquids, drilling fluids	
Soil Backfill and Cover Design Specifications - based upon the approp	riate requirements of Subsection H of 19.15.17 13 NMAC
X Re-vegetation Plan - based upon the appropriate requirements of Subse	ection I of 19.15.17.13 NMAC
Site Reclamation Plan - based upon the appropriate requirements of Su	bsection G of 19 15 17 13 NMAC
Waste Removal Closure for Closed-loop Systems That Utilize Haul-off E facilities for the disposal of liquids, drilling fluids and drill cuttings.	
Disposal Facility Name Envirotech, Basin Disposal	Disposal Facility Permit Number. NM-01-0011 & NM-01-005
On-Site Closure Plan Checklist: (19 15 17 13 NMAC) Instructions: Each of the check mark in the box, that the documents are attached.	following items must bee attached to the closure plan. Please indicate, by a
Siting Criteria Compliance Demonstrations - based upon the appropria	-
Proof of Surface Owner Notice - based upon the appropriate requirement	
Construction and Design of Burial Trench (if applicable) based upon the Protocols and Procedures - based upon the appropriate requirements of	••••
Confirmation Sampling Plan (if applicable) - based upon the appropria	
Waste Material Sampling Plan - based upon the appropriate requirement	
Disposal Facility Name and Permit Number (for liquids, drilling fluids	
Soil Cover Design - based upon the appropriate requirements of Subse	ction H of 19.15.17.13 NMAC
Re-vegetation Plan - based upon the appropriate requirements of Subse	ection I of 19 15.17.13 NMAC
Ste Reclamation Plan - based upon the appropriate requirements of Su	bsection G of 19.15.17.13 NMAC
Operator Application Certification:	
I hereby certify that the information submitted with this application is true, accurate	e and complete to the best of my knowledge and belief.
Name (Print): Crystal Tafoya	Title: Regulatory Technician
Signature: Constal Talays	Date 7/17/2008
e-mail address: <u>crystal tafoya@conocoghillips.com</u>	Telephone: 505-326-9837
OCD Approval: Permit Application (including closure plan)	losure Plan (only)
OCD Representative Signature: Branch Sell	Approval Date: 7-18-09
Title: Enviro/spec	OCD Permit Number
Closure Report (required within 60 days of closure completion): Subsection K of 19.15.1	7.13 NMAC Closure Completion Date:
Closure Method: Waste Excavation and Removal On-Site Closure Alto	ometive Cleaves
Waste Excavation and Removal On-Site Closure Alte	ernative Closure
Closure Report Attactment Checklist: Instructions: Each of the following items box, that the documents are attached.	must be attached to the closure report. Please indicate, by a check mark in the
Proof of Closure Notice	
Proof of Deed Notice (if applicable) Plot Plan	
Confirmation Sampling Analytical Results	
Waste Material Sampling Analytical Results	
Disposal Facility Name and Permit Number	
Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique	
Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation)	
Re-vegetation Application Rates and Seeding Technique	LongitudeNAD
Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) On-site Closure Latitude:	NAD
Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) On-site Closure Latitude: Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is true.	e, accurate and complete to the best of my knowledge and belief I also certify that the
Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) On-site Closure Latitude: Operator Closure Certification:	e, accurate and complete to the best of my knowledge and belief I also certify that the
Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) On-site Closure Latitude: Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is true closure complies with all applicable closure requirements and conditions specified in the applicable closure requirements.	e, accurate and complete to the best of my knowledge and belief I also certify that the proved closure plan

Form C-144 Oil Conservation Division

NEW MEXICO OIL CONSERVATION COMMISSION

Well Location and Acreage Delication Plat

September	14,	19	62
	September	September 14,	September 14, 19

SAN JUAN 28-5 UNIT SF079521-A EL PASO NATURAL GAS COMPANY Lease Operator 60 29 28-N 5-W NIPM Townshire Lange Well No. Unit Letter Section EAST Line 990 Feet From NORTH Line, Pert Fram Located 320 tire = 6715 RIO ARRIBA De ficate i Acre we County G. L. Elevation DAKOTA BASIN DAKOTA Name of Producing Formation

- Is the Operator the only owner in the dedicate Lacreage outline for the plat below?
 Yes So.
- 2. If the answer to question one is "no", have the interests of all the owners beel considered by communitization agreement or otherwise? Yes No If answer is "yes", Type of Consideration.
- 3. If the answer to question two is "no", list all the owners and their respective interests relow.

Owner Lan, Description

RECEIVED

NOV1 1962

OIL CON. COM.
DIST. 3

Section B.

This is to certify that the information in Section A above is true and complete to the best of my knowledge and belief.


El Paso Materal Gas Company

Operator

ORIGINAL SIGNED H.E. MCANALLY

(Address)

Paraington, Nov Nexteo

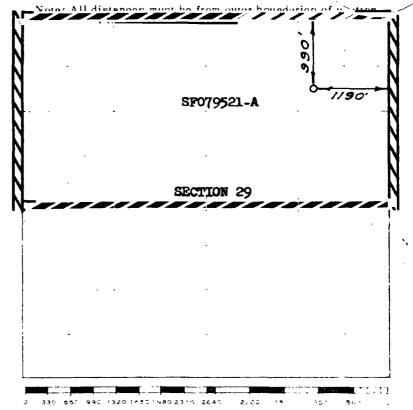

Scale 1 inches equal 1 m le

This is to certify that the above plat was prepared from facilitatives of actual surveys made by me or under my supervision and that the same are time and correct to the best of my knowledge and belief.

(Seal)

Farmington, New Mexico

Date Survey SEPTEMBER 13, 1962

Registered Professional Engineer and or Land Surveyor

Burlington Resources Oil & Gas Company, LP Closed-loop Plans

Closed-loop Design Plan

BR's closed loop system will not entail a drying pad, temporary pit, below grade tank or sump. It will include an above ground tank suitable for holding the cuttings and fluids for rig operations. The tank will be sufficient volume to maintain a safe free board between disposal of the liquids and solids from rig operations.

- 1. Fencing is not required for an above ground closed-loop system
- 2. It will be signed in compliance with 19.15.3.103 NMAC
- 3. A frac tank will be on location to store fresh water

Closed-loop Operating and Maintenance Plan

BR's closed-loop tank will be operated and maintained to contain liquids and solids in order to prevent contamination of fresh water sources, in order to protect public health and the environment. To ensure the operation is maintained the following steps will be followed:

- 1. The liquids will be vacuumed out and disposed of at the Basin Disposal facility (Permit # NM-01-005). Solids in the closed-loop tank will be vacuumed out and disposed of at Envirotech (Permit # NM-01-0011) on a periodic basis to prevent over topping.
- 2. No hazardous waste, miscellaneous solid waste or debris will be discharged into or stored in the tank. Only fluids or cutting used or generated by rig operations will be placed or stored in the tank.
- 3. The division district office will be notified within 48 hours of the discovery of compromised integrity of the closed-loop tank. Upon the discovery of the compromised tank, repairs will be enacted immediately
- 4. All of the above operations will be inspected and a log will be signed and dated. During rig operations the inspection will be daily.

Closed-loop Closure Plan

The closed-loop tank will be closed in accordance with 19.15.17.13. This will be done by transporting cuttings and all remaining sludges to Envirotech (Permit # NM-01-0011) immediately following rig operations. All remaining liquids will be transported and disposed of in the Basin Disposal facility (Permit # NM-01-005). The tanks will be removed from the location as part of the rig move. At time of well abandonment, the site will be reclaimed and re-vegetated to pre-existing conditions when possible.