District I

1625 N French Dr., Hobbs, NM 88240

District II

1301 W. Grand Ave., Artesia, NM 88210

District III

1000 Rio Brazos Rd, Aztec, NM 87410

District IV

1220 S St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-144

July 21, 2008

For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

Type of action:	X Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method
	Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method
	Modification to an existing permit
	Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system,
	below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances

environment. Nor does approval relieve the operator of its responsibility to comply with an	y other applicable governmental authority's rules, regulations or ordinances
Operator: Burlington Resources Oil & Gas Company, LP	OGRID#: 14538
Address: PO Box 4289, Farmington, NM 87499	
Facility or well name: Lackey #100S	
API Number: 30-045-34740 OCI	Permit Number:
U/L or Qtr/Qtr: B(NWNE) Section: 33 Township: 30N	Range: 11W County: San Juan
Center of Proposed Design: Latitude: 36.774371' N Lo	ngitude: 107.991985' W NAD: 1927 X 1983
Surface Owner: X Federal State Private Tribal	Trust or Indian Allotment
X String-Reinforced	LLDPE HDPE PVC Other dume: 7000 bbl Dimensions L 120' x W 55' x D 12'
	7000 et 2 militario 2 120 A 11 23 A 2 12
Type of Operation: P&A Drilling a new well Workover or Dril notice of intent)	ling (Applies to activities which require prior approval of a permit or
Drying Pad Above Ground Steel Tanks Haul-off Bins C Lined Unlined Liner type: Thickness mil Liner Seams: Welded Factory Other	LLDPE HDPE PVD Other 2122232436
X Below-grade tank: Subsection I of 19.15.17.11 NMAC	RECEIVED
Tank Construction material: Metal	OIL CONS. DIV. DIST. 3
Secondary containment with leak detection X Visible sidewalls, liner, 6-1 Visible sidewalls and liner Visible sidewalls only Other Liner Type: Thickness 30 mil X HDPE PVC	RECEIVED AUG 2003 OIL CONS. DIV. DIST. 3 Other
5 Alternative Method:	
Submittal of an exception request is required. Exceptions must be submitted to the S	anta Fe Environmental Bureau office for consideration of approval.

6'						
Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks)						
Chair hale except in height two etrands of barbed wire at ton / Paguired it located within 1000 feat of a parisonant recidence is shoot located institution or church)						
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)						
Four foot height, four strands of barbed wire evenly spaced between one and four feet						
X Alternate. Please specify Please see Design Plan						
7						
Netting: Subsection E of 19.15 17 11 NMAC (Applies to permanent pits and permanent open top tanks)						
X Screen Netting Other						
Monthly inspections (If netting or screening is not physically feasible)						
8						
Signs: Subsection C of 19.15 17.11 NMAC						
12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers						
X Signed in compliance with 19.15.3.103 NMAC						
9						
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19 15.17 NMAC for guidance.						
Please check a box if one or more of the following is requested, if not leave blank:						
Administrative approval(s): Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for cons	sideration of ar	oproval				
Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval						
10 City C twis (was Nicons with a) 10 15 17 10 NMAC						
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable						
source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the						
appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for						
consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.						
does not apply to drying pads of above grade-tanks associated with a closed-loop system.						
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.	Yes	X No				
- NM Office of the State Engineer - IWATERS database search; USGS; Data obtained from nearby wells						
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa	Yes	X No				
lake (measured from the ordinary high-water mark).						
- Topographic map; Visual inspection (certification) of the proposed site						
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial	Yes	X No				
application.						
(Applies to temporary, emergency, or cavitation pits and below-grade tanks)	NA					
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image						
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	No				
(Applied to permanent pits)	XNA					
- Visual inspection (certification) of the proposed site; Aerial photo, Satellite image	🖳					
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering	Yes	X No				
purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.		ZZ INO				
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site.						
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	Yes	X No				
adopted pursuant to NMSA 1978, Section 3-27-3, as amended Written confirmation or verification from the managinality. Written approval obtained from the managinality.						
 Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland. 	mv==	V N₁-				
- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes	XNo				
Within the area overlying a subsurface mine.	Yes	X No				
- Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	🗀 🖽	AINO				
Within an unstable area.	∏Yes	X No				
- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological	ا تا	٠.٠٠				
Society; Topographic map						
Within a 100-year floodplain	Yes	XNo				
- FEMA map	1					

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15 17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
X Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19 15 17.9 NMAC
X Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9
X Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
X Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
X Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17 12 NMAC
X Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of
19.15.17 9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API
12
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15 17.9 NMAC
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17 9
Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC
Design Plan - based upon the appropriate requirements of 19 15 17.11 NMAC
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
l o
Previously Approved Operating and Maintenance Plan API
13
Permanent Pits Permit Application Checklist: Subsection B of 19 15.17.9 NMAC
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15.17.9 NMAC
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
Climatological Factors Assessment
Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17 11 NMAC Dike Protection and Structural Integrity Design based upon the appropriate requirements of 19.15 17.11 NMAC
Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19 15.17 11 NMAC
Quality Control/Quality Assurance Construction and Installation Plan
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17 12 NMAC
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19 15.17.11 NMAC
Nuisance or Hazardous Odors, including H2S, Prevention Plan
Emergency Response Plan
Oil Field Waste Stream Characterization
Monitoring and Inspection Plan
Erosion Control Plan
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17 9 NMAC and 19.15.17.13 NMAC
14
Proposed Closure: 19 15.17 13 NMAC
Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type. X Drilling Workover Emergency Cavitation P&A Permanent Pit X Below-grade Tank Closed-loop System
Lalternative Proposed Closure Method: X Waste Excavation and Removal (Below Grade Tank)
Waste Removal (Closed-loop systems only)
X On-site Closure Method (only for temporary pits and closed-loop systems)
X In-place Burial On-site Trench
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan.
Please indicate, by a check mark in the box, that the documents are attached.
X Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
X Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)
X Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
X Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC
X Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Form C-144 Oil Conservation Division

Page 3 of 5

16 Waste Remoyal Closure For Closed-loop Systems That Utilize Above Ground Ster					
Instructions Please identify the facility or facilities for the disposal of liquids, drilling are required.	fluids and drill cuttings. Use attachment if more than two fa	u ilities			
Disposal Facility Name.	Disposal Facility Permit #:				
Disposal Facility Name.	Disposal Facility Permit #				
Will any of the proposed closed-loop system operations and associated activities Yes (If yes, please provide the information No	es occur on or in areas that will not be used for future so	ervice and operations?			
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specification - based upon the appropriate Re-vegetation Plan - based upon the appropriate requirements of Subset Site Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Plan - based upon the appropriate requirements of Subset Reclamation Pla	ction I of 19 15 17.13 NMAC	C			
17 Siting Criteria (Regarding on-site closure methods only: 19 15.17.10 NMA Instructions: Each string criteria requires a demonstration of compliance in the closure plan is certain siting criteria may require administrative approval from the appropriate district office for consideration of approval Justifications and/or demonstrations of equivalency are required.	Recommendations of acceptable source material are provided belo or may be considered an exception which must be submitted to the				
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - tWATERS database search; USGS. Data obta	uned from nearby wells	Yes X No			
Ground water is between 50 and 100 feet below the bottom of the buried waste		Yes X No			
- NM Office of the State Engineer - ¡WATERS database search; USGS, Data obta	ned from nearby wells	N/A			
Ground water is more than 100 feet below the bottom of the buried waste.		X Yes No			
- NM Office of the State Engineer - ıWATERS database search, USGS; Data obta	ned from nearby wells	□N/A			
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other signific (measured from the ordinary high-water mark).	cant watercourse or lakebed, sinkhole, or playa lake	Yes X No			
- Topographic map; Visual inspection (certification) of the proposed site		□Vac VNo			
Within 300 feet from a permanent residence, school, hospital, institution, or church in - Visual inspection (certification) of the proposed site; Aerial photo, satellite image	**	Yes X No			
Within 500 horizontal feet of a private, domestic fresh water well or spring that less that purposes, or within 1000 horizontal fee of any other fresh water well or spring, in exist - NM Office of the State Engineer - iWATERS database; Visual inspection (certific Within incorporated municipal boundaries or within a defined municipal fresh water within pursuant to NMSA 1978, Section 3-27-3, as amended.	ence at the time of the initial application cation) of the proposed site cell field covered under a municipal ordinance adopted	Yes XNo			
 Written confirmation or verification from the municipality; Written approval obtivition 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual insp 	. ,	Yes X No			
Within the area overlying a subsurface mine. - Written confirantion or verification or map from the NM EMNRD-Mining and M		Yes XNo			
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & M		Yes XNo			
Topographic map Within a 100-year floodplain - FEMA map		Yes X No			
On-Site Closure Plan Checklist: (19 15 17.13 NMAC) Instructions: Each by a check mark in the box, that the documents are attached.	of the following items must bee attached to the closur	e plan. Please indicate,			
X Siting Criteria Compliance Demonstrations - based upon the appropriate					
X Proof of Surface Owner Notice - based upon the appropriate requiremen					
Construction/Design Plan of Burial Trench (if applicable) based upon the					
Construction/Design Plan of Temporary Pit (for in place burial of a dryi		9.15.17 11 NMAC			
X Protocols and Procedures - based upon the appropriate requirements of Confirmation Sampling Plan (if applicable) - based upon the appropriate					
X Waste Material Sampling Plan - based upon the appropriate requirement	•				
X Disposal Facility Name and Permit Number (for liquids, drilling fluids a		not be achieved)			
X Soil Cover Design - based upon the appropriate requirements of Subsect					
X Re-vegetation Plan - based upon the appropriate requirements of Subsec	tion I of 19.15 17 13 NMAC				
X Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC					

Operator Application : I hereby certify that the integral in t	Certification: formation submitted with this application is true, a	accurate and complete to the	e best of my knowledge and belief.
Name (Print).	Crystal Tafoya	Title:	Regulatory Technician
Signature:	Central Talour	Date	8/21/08
e-mail address	crystal.tafoya@conocophillips cou	Telephone.	505-326-9837
0 OCD Approval: \ \[\int\]	Permit Application (including closure plan)	Closure Plan (only)	OCD Conditions (see attachment)
OCD Representative S	- mangan 1) o		Approval Date: 8-27-08
itle: <u>Fu</u>	strol spec	OCD Per	mit Number:
nstructions: Operators are report is required to be su		or to implementing any clos letion of the closure activiti en completed.	NC sure activities and submitting the closure report. The closure ies. Please do not complete this section of the form until an re Completion Date:
Closure Method: Waste Excavation If different from a	and Removal On-site Closure Method	d Alternative Closur	re Method Waste Removal (Closed-loop systems only)
nstructions: Please iden ere utilized.		drilling fluids and drill cut	tings were disposed. Use attachment if more than two facilities
Disposal Facility Name			ty Permit Number:
Disposal Facility Name			ty Permit Number
	ystem operations and associated activities perforn demonstrate complilane to the items below)	ned on or in areas that will i	not be used for future service and opeartions?
Required for impacted Site Reclamation	areas which will not be used for future service an (Photo Documentation) ad Cover Installation		
Re-vegetation App	olication Rates and Seeding Technique		
Closure Report Att		following items must be at	tached to the closure report. Please indicate, by a check mark in
Proof of Closure	Notice (surface owner and division)		
Ħ	otice (required for on-site closure)		
=	-site closures and temporary pits)		
片	mpling Analytical Results (if applicable)		
<u></u>	Sampling Analytical Results (if applicable)		
<u>=</u>	Name and Permit Number		
= "	and Cover Installation pplication Rates and Seeding Technique		
==	(Photo Documentation)		
On-site Closure	· ·	Longitude:	NAD ☐ 1927 ☐ 1983
5			
			e and complete to the best of my knowledge and belief I also certify that closure plan.
Iame (Print):		Title:	
ignature.		Date Date	
-mail address:		Telephone:	

Form C-144

New Mexico Office of the State Engineer POD Reports and Downloads

Township: 30N	Range: 11W S	Sections: 27,28,29	9,32,33,34	
NAD27 X:	Y:,	Zone:	Search Radius:	
County:	Basin:		Number:	Suffix:
Owner Name: (First)	(Last)	e All	O Non-Domestic	O Domestic
POD / Su	rface Data ReportWater C	Avg Dep	oth to Water Report	
(Clear Form	WATERS Menu	Help	
	WATE	R COLUMN REPOR	T 08/20/2008	
-	s are 1=NW 2=NE s are biggest to	=	Depth	Depth Wate

Zone

X

Well

360

150

Record Count: 2

POD Number

RG 50669

SJ 03251

Tws Rng Sec q q q

30N 11W 32 3 4 4

30N 11W 27

Colum

Water

310

77

Well

Water

Colum


New Mexico Office of the State Engineer POD Reports and Downloads


						,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	
Township: 29N	Range: 11W	Sections: 3,4,	5				
NAD27 X:	Y:	Zone:		Search Radius:	1		
County:	Basin:			Number:	Suffix:		
Owner Name: (First)	(La	nst) ② All		○ Non-Domestic	○ Domes	tic	
POD / Surface Data Report Avg Depth to Water Report Water Column Report							
[Clear Form	iWATERS Mer	<u>nu</u> (Help			
	WA	TER COLUMN RE	PORT	08/20/2008		- quantitativa per esta continue.	
		NE 3=SW 4=SE) to smallest)		Depth	Depth	Wat∈	

Tws Rng Sec q q q Zone X

No Records found, try again


POD Number

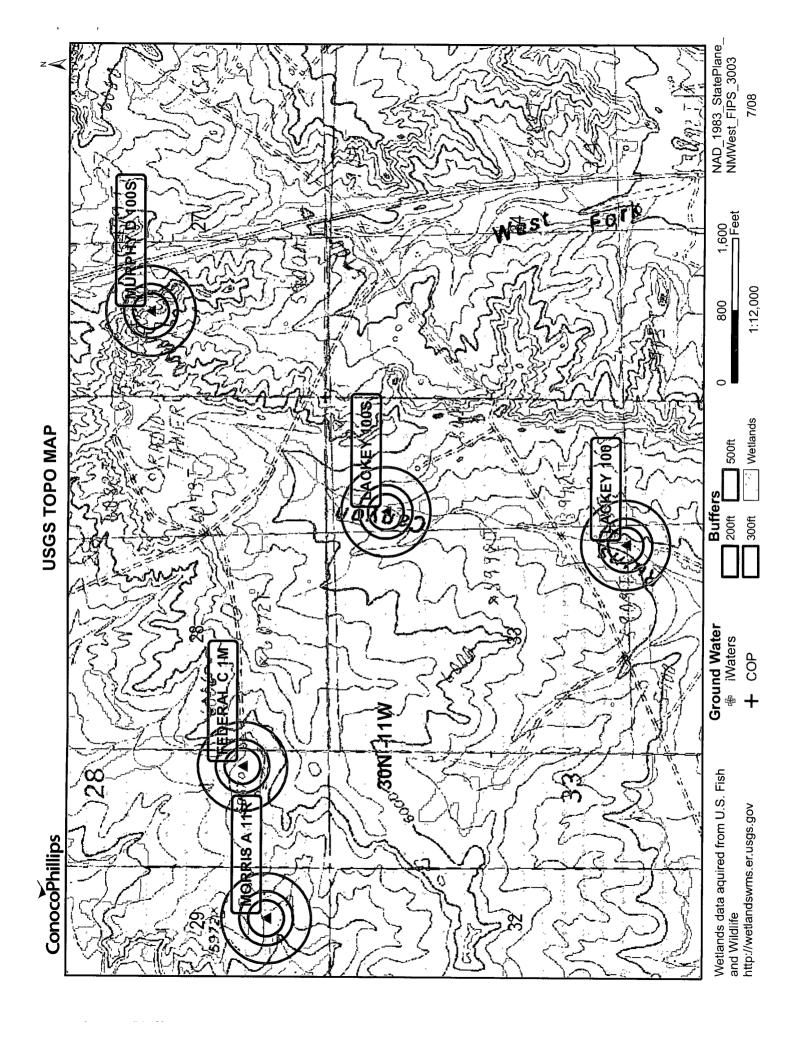


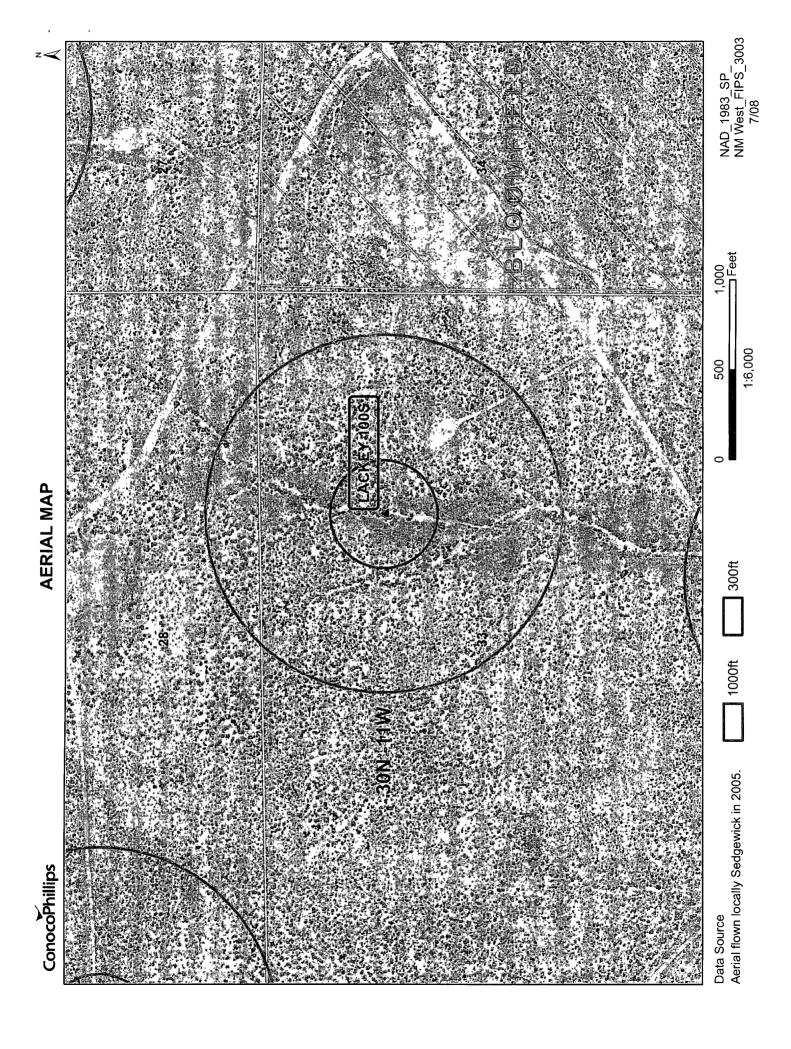


Lackey #100S Mines, Mills and Quarries Web Map

Mines, Mill	s & Quarries Commodity Groups
Δ	Aggregate & Stone Mines
•	Coal Mines
*	Industrial Minerals Mines
•	Industrial Minerals Mills
	Metal Mines and Mill Concentrate
	Potash Mines & Refineries
3	Smelters & Refinery Ops.
*	Uranium Mines
•	Uranium Mills

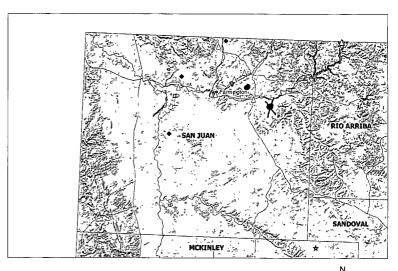





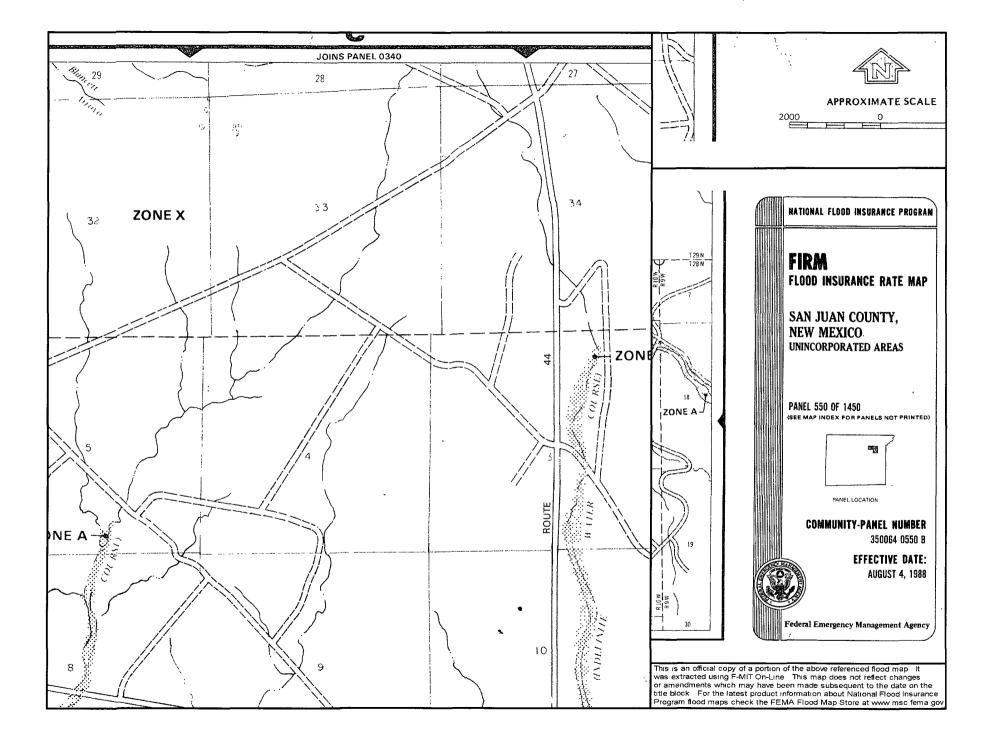

Siting Criteria Compliance Demonstrations

The Lackey #100S is not located in an unstable area. The location is not over a mine and is not on the side of a hill. The location of the excavated pit material will not be located within 300' of any continuously flowing watercourse or 200' from any other watercourse.

Hydrogeological Report for Lackey #100S

Regional Geological context:

The Nacimiento Formation is of Paleocene age (Baltz, 1967, p. 35). It crops out in a broad band inside the southern and western margins of the central basin and in a narrow band along the west face of the Nacimiento Uplift. The Nacimiento is a nonresistant unit and typically erodes to low, rounded hills or forms badland topography.

The Nacimiento Formation occurs in approximately only the southern two-thirds of the San Juan Basin where it commformably overlies and intertongues with the Ojo Alamo Sandstone (Fassett, 1974, p. 229). The Nacimiento Formation grades laterally into the main part of the Animas Formation (Fassett and Hinds, 1971, p. 34); thus, in this area, the two formations occupy the same stratigraphic interval.

Strata of the Nacimiento Formation were deposited in lakebeds in the central basin area with lesser deposition in stream channels (Brimhall, 1973, p. 201). In general, the Nacimiento consists of drab, interbedded black and gray shale with discontinuous, white, medium- to very coarse grained arkosic sandstone (Stone e al., 1983, p.30). Stone et al. indicated that the formation may contain more sandstone than commonly reported because some investigators assume the slope-forming strata in the unit area shales, whereas in many places the strata actually are poorly consolidated sandstones. Total thickness of the Nacimiento Formation ranges from about 500 to 1,300 feet. The unit generally thickens from the basin margins toward the basin center (Steven et al., 1974). The sandstone deposits within the Nacimiento Formation are much thinner than the total thickness of the formation because their environment of deposition was localized stream channels (Brimhall, 1973, p. 201). The thickness of the combined San Jose, Animas, and Nacimiento Formations ranges from 500 to more than 3.500 feet.

Hydraulic Properties:

Reported well yields for 53 wells completed in either the Animas or Nacimiento Formations range from 2 to 90 gallons per minute and the median yield is 7.5 gallons per minute. The primary use of water from Nacimiento and Animas Formations is domestic and livestock supplies. There are no known aquifer tests for the Animas or Nacimiento Formations, but specific capacities reported for six wells range from 0.24 to 2.30 gallons per minute per foot of drawdown (Levings et al., 1990).

The Animas and Nacimiento Formations are in many ways hydrologically similar to the San Jose Formation because sands in both units produce approximately the same quantities of water. However, the greater percentage of fine materials in the Animas and Nacimiento Formations may restrict downward vertical leakage to the Ojo Alamo Sandstone or Kirtland Shale. The poorly cemented fine material is highly erodible, forms a badland terrain, and supports only spotty vegetation. These conditions are more conductive to runoff than retention of precipitation.

References:

Baltz, E.H., 1967, Stratigraphy and regional tectonic implications of part of Upper Cretaceous rocks, east-central San Juan Basin, New Mexico: USGS Professional Paper

552, 101 p.

Brimhall, R.M., 1973, Ground-water hydrology of Tertiary rocks of the San Juan Basin, New Mexico, in Fassett, J.E., ed., Cretaceous and Tertiary rocks of the Southern Colorado Plateau: Four Corners Geological Society Memoir, p. 197-207.

Fassett, J.E., 1974, Cretaceous and Tertiary rocks of the eastern San Juan Basin, New Mexico and Colorado, in Guidebook of Ghost Ranch, central-northern New Mexico: New Mexico Geological Society, 25th Field Conference, p. 225-230.

Fassett, J.E., and Hinds, J.S., 1971, Geology and fuel resources of the Fruitland Formation and Kirtland Shale of the San Juan Basin, New Mexico and Colorado: USGS Professional Paper 676, 76 p.

Levings, G.W., Craigg, S.d., Dam, W.L., Kernodle, J.M., and Thorn, C.R., 1990, Hydrogeology of the San Jose, Nacimiento, and Animas Formations in the San Juan structural basin, New Mexico, Colorado, Arizona, and Utah: USGS Hydrologic Investigations Atlas HA-720-A, 2 sheets.

Stone, W.J., Lyford, F.P., Frenzel, P.F., Mizell, N.H., and Padgett, E.T., 1983, Hydrogeology and water resources of San Juan Basin, New Mexico: New Mexico Bureau of Mines and Mineral Resources, Hydrologic Report 6.

Tafoya, Crystal

From:

Tafoya, Crystal

Sent:

Wednesday, August 20, 2008 2:25 PM 'mark_kelly@nm.blm.gov'

To: Subject:

Surface Owner Notification

The following well locations temporary pit will be closed on-site. Please feel free to contact me at any time if you have any questions.

Howell A #1B Huerfano Unit #556 Lackey #100S Morris A #11R Heaton Com LS 8 #100

Thanks & Have a great day,

Crystal L. Tafoya Regulatory Technician ConocoPhillips Company San Juan Business Unit Phone: (505) 326-9837

Email: Crystal.Tafoya@conocophillips.com

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico

Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
Submit to Appropriate District Office

1220 South St. Francis Dr. Santa Fe, NM 87505

JUN 13 2008

Form C-102

State Lease - 7 Copies Fee Lease - 3 Copies

Bureau of Land Management Farmington Field Office


AMMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

30-045	Pi Number			Pool Code 71629		3 Pool Name BASIN FRUITLAND COAL			
⁴ Property Cod 7237			5 Property Name LACKEY						⁶ Well Number 100S
7 OGRID No. 14538	o		8 Operator Name BURLINGTON RESOURCES OIL & GAS COMPANY LP						⁹ Elevation 5 966
					10 SURFACE I	LOCATION			
UL or lot no. B	Section 33	Township 30-N	Range 11-W	Lot Idn	Feet from the 660	North/South line NORTH	Feet from the 1445	East/West line EAST	County SAN JUAN
			11 F	Bottom H	ole Location	If Different Fro	m Surface		
UL or lot no. B	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres 325.58	1	or Infill 14 C	onsolidation	Code 15	Order No.				

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

O ₁₆		3			<u> </u>
16 BLM 1996		BLM S 89'28'05" W	2634.8' (M) 2643.3' (R)	BLM 1969	OPERATOR CERTIFICATION
	WELL FLAG NAD 83 LAT: 36.774371° N	.099			I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or
14	VG: 107.991985° W		1445'	£3	has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a
==-	NAD 27				voluntary pooling agreement or a compulsory pooling order
11	NT:36°46.462000' N : 107°59.481739' W	E/2 DEDICATED ACRE SF-076386 SECTION 33	AGE	2724.5' 2722.1'	heretofore entered by the division.
		T-30-N, R-11-W			Signature //
					Crystal Walker Printed Nume
			i		Regulatory Technician
				011' E 016'21	Title and E-mail Address
				ZZ	April 15th, 2008 Date
			Ī	BLM 1969	18 SURVEYOR CERTIFICATION
					I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys mode by me or under my supervision, and that the same is true and correct to the best of my belief
		SF-04	3260-A		Date of Survey: 3/20/08 Signature and Seal of Professional Surveyor:
	BLM 1969		BLM 1969 C.C		Certificate Number: NM 11393

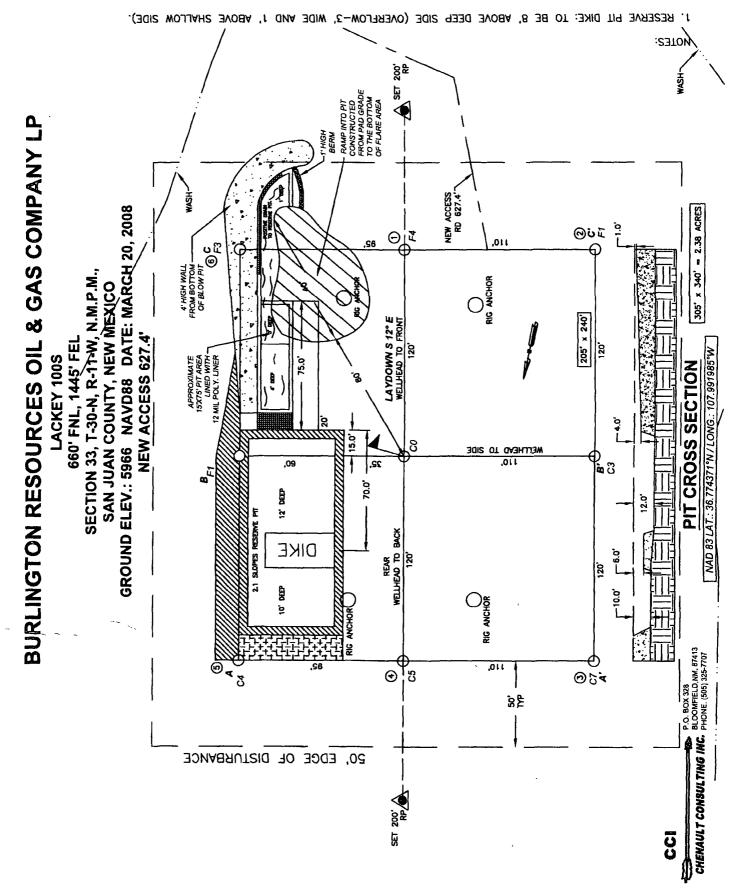


BURLINGTON RESOURCES OIL & GAS COMPANY LP

LACKEY 100S

660' FNL, 1445' FEL

SECTION 33, T-30-N, R-11-W, N.M.P.M., SAN JUAN COUNTY, NEW MEXICO

ELEV.: 5966 NAVD88

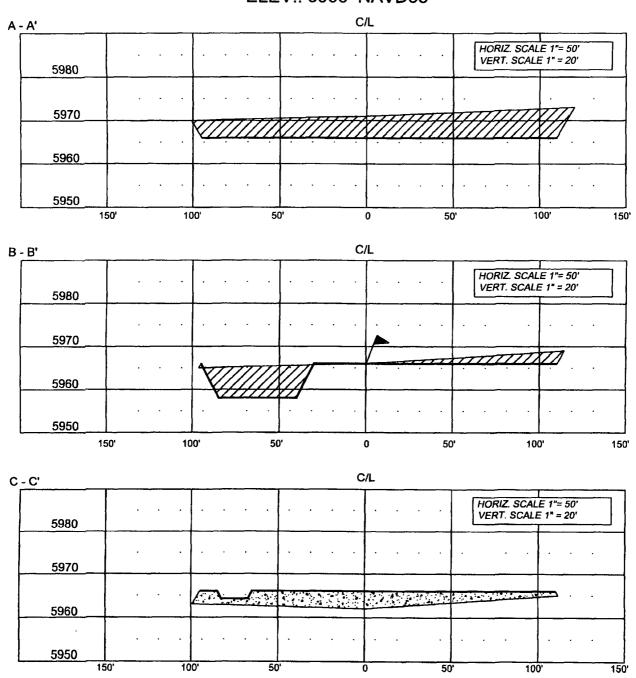

NOTE: CCI IS NOT LIABLE FOR UNDERGROUND UTILITIES

CONTRACTOR SHOULD CALL ONE-CALL FOR LOCATION OF ANY MARKED OR UNMARKED BURIED PIPELINES OR CABLES ON WELL PAD AND OR ACCESS ROAD PRIOR TO CONSTRUCTION.

REVISIONS							
NO.	DESCRIPTION	REVISED BY	DATE				
1	ISSUED FOR REVIEW	AF	3/20/08				
			 				
							
1 1							

CCI

P.O BOX 328 BLOOMFIELD.NM. 87413 PHONE: (505) 325-7707

CHENAULT CONSULTING INC.

Burlington Resources Oil & Gas Company, LP San Juan Basin Pit Design and Construction Plan

In accordance with Rule 19.15.17 the following information describes the design and construction of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

- 1. BR will design and construct a temporary pit to contain liquids and solids and prevent contamination of fresh water and protect public health and environment.
- 2. Prior to constructing the pit, topsoil will be stockpiled in the construction zone for later use in restoration.
- 3. BR will post a well sign, not less than 12" by 24", on the well site prior to construction of the temporary pit. The sign will list the operator on record as the operator; the location of the well site by unit letter, section, township range; and emergency telephone numbers.
- 4. BR shall construct all new fences utilizing 48" steel mesh field-fence (hogwire) on the bottom with a single strand of barbed wire on top. T-posts shall be installed every 12 feet and corners shall be anchored utilizing a secondary T-post. Temporary pits will be fenced at all times excluding drilling or workover operations, when the front side of the fence will be temporarily removed for operational purposes.
- 5. BR shall construct the temporary pit so that the foundation and interior slopes are firm and free of rocks, debris, sharp edges or irregularities to prevent liner failure.
- 6. BR shall construct the pit so that the slopes are no steeper than two horizontal feet to 1 vertical foot.
- 7. Pit walls will be walked down by a crawler type tractor following construction
- 8. All temporary pits will be lined with a 20-mil, string reinforced, LLDPE liner, complying with EPA SW-846 method 9090A requirements.
- 9. Geotextile will be installed beneath the liner when rocks, debris, sharp edges or irregularities cannot be avoided.
- All liners will be anchored in the bottom of a compacted earth-filled trench at least 18 inches deep.
- 11. BR will minimize liner seams and orient them up and down, not across a slope. Factory seams will be used whenever possible. BR will ensure all field seams are welded by qualified personnel. Field seams will be overlapped four to six inches and will be oriented parallel to the line of maximum slope. BR will minimize the number of field seams in corners and irregularly shaped areas.
- 12. The liner shall be protected from any fluid force or mechanical damage through the use of mud pit slides, or a manifold system.
- 13. The pit shall be protected from run-off by constructing and maintaining diversion ditches around the location or around the perimeter of the pit in some cases.
- 14. The volume of the pit shall not exceed 10 acre-feet, including freeboard.
- 15. Temporary blow pits will be constructed to allow gravity flow to discharge into lined drill pit.
- 16. The lower half of the blow pit (nearest lined pit) will be lined with the same 20 mil liner. The upper half of the blow pit will remain unlined as allowed in Rule 19.15.17.11 F.11.
- 17. BR will not allow freestanding liquids to remain on the unlined portion of a temporary blow pit.

Burlington Resources Oil & Gas Company, LP San Juan Basin Maintenance and Operating Plan

In accordance with Rule 19.15.17 the following information describes the operation and maintenance of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

- 1. BR will operate and maintain a temporary pit to contain liquids and solids and prevent contamination of fresh water and protect public health and environment.
- 2. BR will conserve drilling fluids by transferring liquids to pits ahead of the rigs whenever possible. All other drilling fluids will be disposed at Basin Disposal Inc., permit # NM-01-005.
- 3. BR will not discharge or store any hazardous waste in any temporary pit.
- 4. If any pit liner's integrity is compromised, or if any penetration of the liner occurs above the liquid's surface, then BR shall notify the Aztec Division office by phone or email within 48 hours of the discovery and repair the damage or replace the liner.
- 5. If a leak develops below the liquid's level, BR shall remove all liquids above the damaged liner within 48 hours and repair the damage or replace the liner. BR shall notify the Aztec Division office by phone or email within 48 hours of the discovery for leaks less than 25 barrels BR shall notify the Aztec Division office as required pursuant to Subsection B of 19.15.3.116 NMAC shall be reported within twenty-four (24) hours of discovery of leaks greater than 25 barrels. In addition, immediate verbal notification pursuant to Subsection B, Paragraph (1), and Subparagraph (d) of 19.15.3.116 NMAC shall be reported to the division's Environmental Bureau Chief.
- 6. The liner shall be protected from any fluid force or mechanical damage through the use of mud pit slides, or a manifold system.
- 7. The pit shall be protected from run-off by constructing and maintaining diversion ditches around the location or around the perimeter of the pit in some cases.
- 8. BR shall immediately remove any visible layer of oil from the surface of the temporary pit after cessation of a drilling or workover operation. Oil absorbent booms will be utilized to contain and remove oil from the pit's surface. An oil absorbent boom will stored on-site until closure of pit.
- 9. Only fluids generated during the drilling or workover process may be discharged into a temporary pit.
- 10. BR will maintain the temporary pit free of miscellaneous solid waste or debris.
- 11. During drilling or workover operations, BR will inspect the temporary pit at least once daily to ensure compliance with this plan. Inspections will be logged in the IADC reports. BR will file this log with the Aztec Division office upon closure of the pit.
- 12. After drilling or workover operations, BR will inspect the temporary pit weekly so long as liquids remain in the temporary pit. A log of the inspections will be stored at BR's office electronically and will be filed with the Aztec Division office upon closure of the pit.
- 13. BR shall maintain at least two feet of freeboard for a temporary pit.
- 14. BR shall remove all free liquids from a temporary pit within 30 days from the date the operator releases the drilling rig.
- 15. BR shall remove all free liquids from a cavitation pit within 48 hours after completing cavitation. BR may request additional time to remove liquids from the Aztec Division office if it is not feasible to remove liquids within 48 hours.

Burlington Resources Oil & Gas Company, LP San Juan Basin Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of pit closure. Closure report will be filed on C-144 and incorporate the following:

- Details on Capping and Covering, where applicable.
- Plot Plan (Pit Diagram)
- Inspection Reports
- Sampling Results
- C-105
- Copy of Deed Notice will be filed with County Clerk

- 1. All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves.
- 2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.
- 3. The surface owner shall be notified of BR's closing of the temporary pit as per the approved closure plan using certified mail, return receipt requested.
- 4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.
- 5. Notice of Closure will be given to the Aztec Division office between 72 hours and one week of closure via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.
- 6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at a licensed disposal facility.
- 7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.
- 8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

Components	Tests Method	Limit (mg/Kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	2500
GRO/DRO	EPA SW-846 8015M	5,00
Chlorides	EPA 300.1	1000/500

- 9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.
- 10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.
- 11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011
- 12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Reshaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 13. Notification will be sent to OCD when the reclaimed area is seeded.
- 14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (unimpacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Туре	Variety or Cultivator	PLS/A
Western wheatgrass	Arriba	3.0
Indian ricegrass	Paloma or Rimrock	3.0
Slender wheatgrass	San Luis	2.0
Crested wheatgrass	Hy-crest	3.0
Bottlebrush Squirreltail	Unknown	2.0
Four-wing Saltbrush	Delar	.25

Species shall be planted in pounds of pure live seed per acre: Present Pure Live Seed (PLS) = Purity X Germination/100 Two lots of seed can be compared on the basis of PLS as follows:

Source No. One (poor quality)

Purity

50 percent

Germination

40 percent

Percent PLS

20 percent

Source No. two (better quality)

Purity

80 percent

Germination

63 percent

Percent PLS

50 percent

5 lb. bulk seed required to make 2 lb. bulk seed required to make

1 lb. PLS 1 lb. PLS

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.


Burlington Resources Oil & Gas Company, LP San Juan Basin Below Grade Tank Design and Construction

In accordance with NMAC 19.15.17 the following information describes the design and construction of below grade tanks on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all below grade tanks (BGT). A separate plan will be submitted for any BGT which does not conform to this plan.

- 1. BR will design and construct a BGT to contain liquids and to prevent contamination of fresh water and protect public health and environment.
- 2. BR will use the general location sign posted on location. If no general sign is posted a separate sign at the location of the BGT will be provided.
- 3. BR shall construct fencing around the BGT using 4 foot hog wire fencing topped with two strands of barbed wire, or with a pipe top rail. A six foot chain link fence topped with three strands of barbed wire will be use if the well location is within 1000 feet of permanent residence, school, hospital, institution or church.
- 4. BR will construct a expanded metal covering on the top of the BGT
- 5. BR shall ensure that a below-grade tank is constructed of materials resistant to the below-grade tank's particular contents and resistant to damage from sunlight.
- 6. The BR below-grade tank system shall have a properly constructed foundation consisting of a level base free of rocks, debris, sharp edges or irregularities to prevent punctures, cracks or indentations of the liner or tank bottom.
- 7. BR shall construct a below-grade tank to prevent overflow and the collection of surface water run-on.
- 8. BR will construct and use a below-grade tank that does not have double walls. The below-grade tank's side walls will be open for visual inspection for leaks, the below-grade tank's bottom is elevated a minimum of six inches above the underlying ground surface and the below-grade tank is underlain with a geomembrane liner to divert leaked liquid to a location that can be visually inspected.
- 9. BR shall equip below-grade tanks designed in this manner with a properly operating automatic high-level shut-off control device and manual controls to prevent overflows.
- 10. The geomembrane liner shall consist of 30-mil flexible PVC or 60-mil HDPE liner, or an equivalent liner material that the appropriate division district office approves. The geomembrane liner shall have a hydraulic conductivity no greater than 1 x 10-9 cm/sec. The geomembrane liner shall be composed of an impervious, synthetic material that is resistant to petroleum hydrocarbons, salts and acidic and alkaline solutions. The liner material shall be resistant to

ultraviolet light. Liner compatibility shall comply with EPA SW-846 method 9090A.

11. The general specification for design and construction are attached in the BR document.

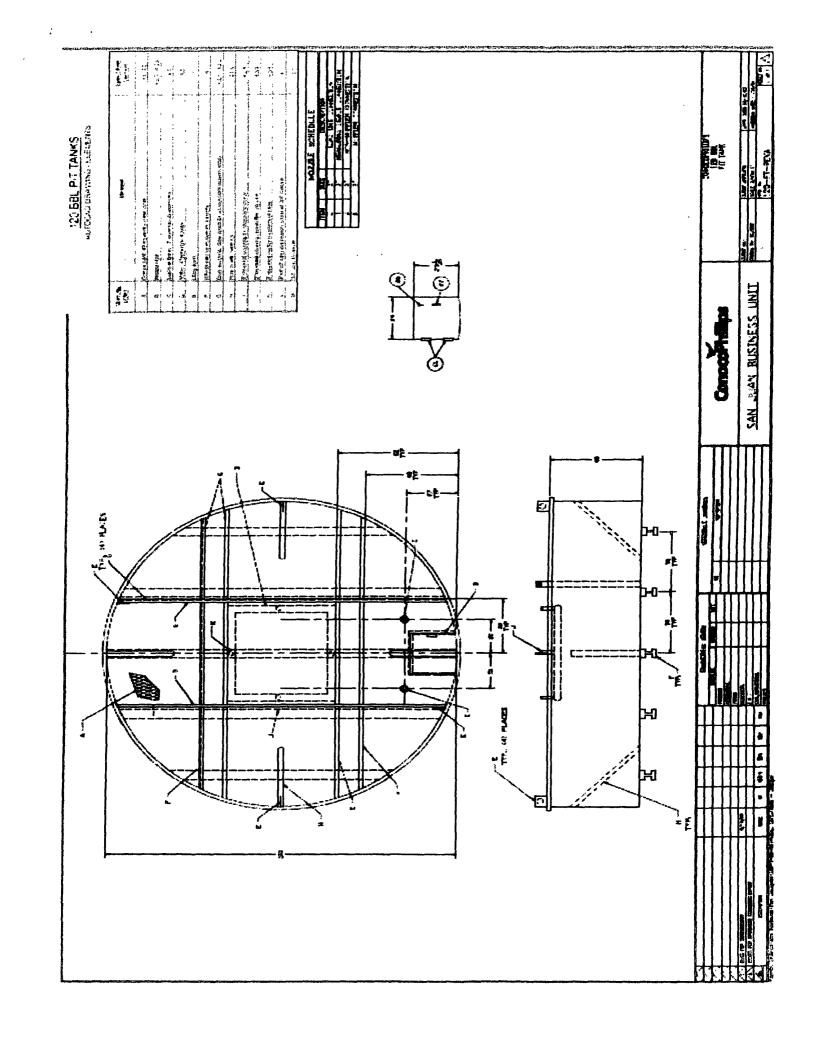

Burlington Resources Oil & Gas Company, LP San Juan Basin Below Grade Tank Maintenance and Operating Plan

In accordance with Rule 19.15.17 the following information describes the operation and maintenance of Below Grade Pit (BGT) on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all BGT. A separate plan will be submitted for any BGT which does not conform to this plan.

- 1. BR will operate and maintain a BGT to contain liquids and solids and prevent contamination of fresh water and protect public health and environment.
- 2. BR shall not allow a below-grade tank to overflow or allow surface water run-on to enter the below-grade tank.
- 3. BR shall continuously remove any visible or measurable layer of oil from the fluid surface of a below-grade tank in an effort to prevent significant accumulation of oil overtime.
- 4. BR shall inspect the below-grade tank at least monthly and maintain a written record of each inspection for five years.
- 5. BR shall maintain adequate freeboard to prevent overtopping of the below-grade tank.

Burlington Resources Oil & Gas Company, LP San Juan Basin Below Grade Tank Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of Below Grade Tanks (BGTs) on Burlington Resources Oil & Gas Company, LP locations hereinafter known as BR locations. This is BR's standard procedure for all BGTs. A separate plan will be submitted for any BGT which does not conform to this plan.

General Requirements:

- 1. BR shall close a below-grade tank within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the division requires because of imminent danger to fresh water, public health or the environment.
- BR shall close an existing below-grade tank that does not meet the requirements
 of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not
 included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years
 after June 16, 2008, if not retrofitted to comply with Paragraphs (1) through (4) of
 Subsection I of 19.15.17.11 NMAC.
- BR shall close a permitted below-grade tank within 60 days of cessation of the below-grade tank's operation or as required by the transitional provisions of Subsection B of 19.15.17.17 NMAC in accordance with a closure plan that the appropriate division district office approves. The closure report will be filed on C-144
- 4. BR shall remove liquids and sludge from a below-grade tank prior to implementing a closure method and shall dispose of the liquids and sludge in a division-approved facility.
- 5. BR shall remove the below-grade tank and dispose of it in a division-approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.
- 6. If there is any on-site equipment associated with a below-grade tank, then BR shall remove the equipment, unless the equipment is required for some other purpose.
- 7. BR shall test the soils beneath the below-grade tank to determine whether a release has occurred. BR shall collect, at a minimum, a five point, composite sample; collect individual grab samples from any area that is wet, discolored or showing other evidence of a release; and analyze for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 0.2 mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration, as determined by EPA method 418.1 or other EPA method that the division approves, does not exceed 100

mg/kg; and the chloride concentration, as determined by EPA method 300.1 or other EPA method that the division approves, does not exceed 250 mg/kg, or the background concentration, whichever is greater. BR shall notify the division of its results on form C-141.

- 8. If BR or the division determines that a release has occurred, then BR shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC, as appropriate.
- If contamination is confirmed by field sampling. BR will follow the Guidelines For Remediation Of Leaks, Spills, and Releases NMOCD August 1993 when remediating contaminants identified
- 10. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, then BR shall backfill the excavation with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover; recontour and re-vegetate the site.
- 11. Notice of Closure will be given to the Aztec Division office between 72 hours and one week of closure via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.
- 12. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on C-144 and incorporate the following:
 - Details on Capping and Covering, where applicable.
 - Sampling Results
- 13. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

- 15. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.
- 16. The surface owner shall be notified of BR's closing of the below-grade tank as per the approved closure plan using certified mail, return receipt requested.