<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

# State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.
For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Closed-Loop System, Below-Grade Tank, or
Proposed Alternative Method Permit or Closure Plan Application

Pit, Closed-Loop System, Below-Grade Tank, or
Proposed Alternative Method Permit or Closure Plan Application
Type of action:  Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method  Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method  Modification to an existing permit  Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request
ease be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the avironment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
Operator: Williams Operating Co., LLC OGRID #: 120782
Address: PO Box 640 / 721 S Main Aztec, NM 87410
Facility or well name: JAECO 26-3 22 #001A
API Number:3003930050 OCD Permit Number:
U/L or Qtr/Qtr O Section 22 Township 26N Range 03W County: Rio Arriba
Center of Proposed Design: Latitude <u>36° 28' 1.04527'' N</u> Longitude <u>107° 07 49.14641</u> NAD: □1927 ⊠ 1983
Surface Owner: 🗌 Federal 🗌 State 🗌 Private 🔀 Tribal Trust or Indian Allotment
2.
∑ <u>Pit</u> : Subsection F or G of 19.15.17.11 NMAC
Temporary: ☑ Drilling ☐ Workover
☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A
☐ Lined ☐ Unlined Liner type: Thickness _20mil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other
⊠ String-Reinforced
Liner Seams: Welded Factory Other Volume: 17,500 bbl Dimensions: L 140' x W 60' x D 12'
☐ Closed-loop System: Subsection H of 19.15.17.11 NMAC  Type of Operation: ☐ P&A ☐ Drilling a new well ☐ Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)
☐ Drying Pad ☐ Above Ground Steel Tanks ☐ Haul-off Bins ☐ Other ☐ Lined ☐ Unlined Liner type: Thicknessmil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other ☐ CONTROL OF CONTROL O
Liner Seams: Welded Factory Other
Below-grade tank: Subsection I of 19.15.17.11 NMAC
Below-grade tank: Subsection I of 19.15.17.11 NMAC  Volume:bbl Type of fluid:
Below-grade tank: Subsection I of 19.15.17.11 NMAC  Volume:bbl Type of fluid:  Early Construction material:
Below-grade tank: Subsection I of 19.15.17.11 NMAC  Volume:bbl Type of fluid:  Tank Construction material:  Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off  Visible sidewalls and liner Visible sidewalls only Other
Secondary containment with leak detection [ ] Visible sidewalls, liner, o-inch lift and automatic overflow shut-off
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other
5.  Altownstive Method:

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)						
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, linstitution or church)	hospital,					
Four foot height, four strands of barbed wire evenly spaced between one and four feet						
Alternate. Please specifyper BLM/Tribal requirements						
7.  Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)						
Screen Netting Other						
Monthly inspections (If netting or screening is not physically feasible)						
8. Signs: Subsection C of 19.15.17.11 NMAC						
12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers						
⊠ Signed in compliance with 19.15.3.103 NMAC						
9.  Administrative Approvals and Exceptions:  Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.  Please check a box if one or more of the following is requested, if not leave blank:  Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau of consideration of approval.  Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	office for					
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying above-grade tanks associated with a closed-loop system.	priate district pproval.					
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ⊠ No					
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☒ No					
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applies to temporary, emergency, or cavitation pits and below-grade tanks)  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ⊠ No ☐ NA					
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applies to permanent pits)	☐ Yes ☐ No ☐ NA					
<ul> <li>Visual inspection (certification) of the proposed site; Aerial photo; Satellite image</li> <li>Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.</li> <li>NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site</li> </ul>	☐ Yes ⊠ No					
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ⊠ No					
Within 500 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☒ No					
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☒ No					
Within an unstable area.  - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☒ No					
Within a 100-year floodplain FEMA map						

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC  Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.  Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC  Previously Approved Design (attach copy of design) API Number:  or Permit Number:
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC  Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.  Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9  Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC  Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC  Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC  Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
<ul> <li>□ Previously Approved Design (attach copy of design)</li> <li>□ Previously Approved Operating and Maintenance Plan</li> <li>□ API Number:</li></ul>
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.  Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H <sub>2</sub> S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.  Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative  Proposed Closure Method: Waste Excavation and Removal  Waste Removal (Closed-loop systems only)  On-site Closure Method (Only for temporary pits and closed-loop systems)  In-place Burial On-site Trench Burial  Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.    Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC   Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC   Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)   Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC   Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

C-144 Page 3 of 19 JAECO 26-3 22 #1A

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.I Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if the state of the disposal of liquids and drill cuttings.							
facilities are required.							
Disposal Facility Name: Disposal Facility Permit Number:							
Disposal Facility Name: Disposal Facility Permit Number:							
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future service. Yes (If yes, please provide the information below) No	vice and operations?						
Required for impacted areas which will not be used for future service and operations:  Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC  Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC  Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	C						
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate disting considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justif demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.	rict office or may be						
Ground water is less than 50 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☑ No ☐ NA						
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☑ No ☐ NA						
Ground water is more than 100 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	⊠ Yes □ No □ NA						
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	⊠ Yes □ No						
<ul> <li>Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.</li> <li>Visual inspection (certification) of the proposed site; Aerial photo; Satellite image</li> </ul>	☐ Yes ☑ No						
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No						
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ⊠ No						
Within 500 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☑ No						
Within the area overlying a subsurface mine.  - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ⊠ No						
<ul> <li>Within an unstable area.</li> <li>Engineering measures incorporated into the design; NM Bureau of Geology &amp; Mineral Resources; USGS; NM Geological Society; Topographic map</li> </ul>	☐ Yes ☑ No						
Within a 100-year floodplain FEMA map	☐ Yes ⊠ No						
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan by a check mark in the box, that the documents are attached.  Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC  Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC  Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC  Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.  Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC  Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC  Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC  Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cann Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC  Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	15.17.11 NMAC						

Operator Application Certification:  I hereby certify that the information submitted with this application is true, accur	ate and complete to the best of my knowledge and belief.
Name (Print): Michael K. Lane	Title: Sr. EH & S Specialist
Signature:	Date: 10/8/08
e-mail address: myke.lane@williams.com	Telephone: 505-634-4219
OCD Approval: Permit Application (including closure plan) (Closure P	lan (only) OCD Conditions (see attachment)
OCD Representative Signature: Bol Dell	Approval Date: <u>10-23-08</u>
Title: En siro (spec	OCD Permit Number:
Closure Report (required within 60 days of closure completion): Subsection Instructions: Operators are required to obtain an approved closure plan prior to The closure report is required to be submitted to the division within 60 days of the section of the form until an approved closure plan has been obtained and the closure plan prior to the division within 60 days of the division within 60 days o	to implementing any closure activities and submitting the closure report. The completion of the closure activities. Please do not complete this
22. Closure Method: ☐ Waste Excavation and Removal ☐ On-Site Closure Method ☐ Alterna ☐ If different from approved plan, please explain.	ative Closure Method   Waste Removal (Closed-loop systems only)
Closure Report Regarding Waste Removal Closure For Closed-loop Systems Instructions: Please indentify the facility or facilities for where the liquids, drift two facilities were utilized.	lling fluids and drill cuttings were disposed. Use attachment if more than
Disposal Facility Name:	
Disposal Facility Name:  Were the closed-loop system operations and associated activities performed on or	
Yes (If yes, please demonstrate compliance to the items below) No	
Required for impacted areas which will not be used for future service and operate    Site Reclamation (Photo Documentation)   Soil Backfilling and Cover Installation   Re-vegetation Application Rates and Seeding Technique	ions:
24.  Closure Report Attachment Checklist: Instructions: Each of the following it mark in the box, that the documents are attached.  □ Proof of Closure Notice (surface owner and division) □ Proof of Deed Notice (required for on-site closure) □ Plot Plan (for on-site closures and temporary pits) □ Confirmation Sampling Analytical Results (if applicable) □ Waste Material Sampling Analytical Results (required for on-site closure) □ Disposal Facility Name and Permit Number □ Soil Backfilling and Cover Installation □ Re-vegetation Application Rates and Seeding Technique □ Site Reclamation (Photo Documentation)	
On-site Closure Location: Latitude Longin	tude NAD: \[ \] 1927 \[ \] 1983
Operator Closure Certification:  I hereby certify that the information and attachments submitted with this closure in the content of the cont	report is true, accurate and complete to the best of my knowledge and
belief. I also certify that the closure complies with all applicable closure requirer  Name (Print):	
Signature:	Date:

District.l Form C-102 State of New Mexico 1625 N. French Dr., Hobbs, NM 88240 Revised June 10, 2003 Energy, Minerals & Natural Resources Department. Submit to Appropriate District Office 1361 W. Grand Avenue, Artesia, NM 88210 OIL CONSERVATION DIVISION State Lease - 4 Copies District III 1220 South St. Francis Dr. 1000 Kie Benzos Rd., Aztec, NM 87410 Fee Lease - 3 Copies Santa Fe, NM 87505 District IV 1120 S. St. Francis Dr., Santa Fc. NM 87505 ☐ AMENDED REPORT WELL LOCATION AND ACREAGE DEDICATION PLAT API Number BLANCO MESAVERDE 72319 Property Code Well Number Property Name 22 OGRID No. Operator Name Elevation 7362 120782 JAECO 10 Surface Location UL or lot no. Feet from the Fast/West line Let Ide North South lin Section Township Feet from the Coemin SOUTH 1850 EAST RTO ARRIBA 790 0 22 26N 319 11 Bottom Hole Location If Different From Surface UL or lot no. Section Township North/South line Feet from the East/West line <sup>10</sup> Dedicated Acres <sup>3</sup> John or Intili Consolidation Code Order No. E/2 320NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION 5285.58 17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief. Signature Printed Name 00 Title and E-mail Address 5280 Oate SECTION 22 18 SURVEYOR CERTIFICATION 5280.00 I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. APRIL 6, 2006 1850 06 5284.07 Appressional

# Hydrogeological Report Williams Production Company, LLC JAECO 26-3 22 #1A Regional Hydrological Context

### **Referenced Well Location:**

The referenced well and pit is located on the Jicarilla Reservation in Rio Arriba County, New Mexico. This site is positioned in the northeastern portion of the San Juan Basin, an asymmetrical syncline that extends from northwestern New Mexico into southwestern Colorado (Carson National Forest DEIS, 2007). Elevation of the referenced well is approximately 7362 feet MSL.

### General Regional Groundwater Description:

As a portion of the San Juan Basin, the Jicarilla Reservation is underlain by sandstone aquifers of the Colorado Plateau. The primary aquifer of potential concern at this location is the Unita-Animas Aquifer, composed primarily of Lower Tertiary rocks in the San Juan Basin. The aquifer consists of the San Jose Formation; the underlying Animas formation and its lateral equivalent, the Nacimiento formation; and the Ojo Alamo Sandstone. The thickness of the Unita-Animas aquifer generally increases toward the central part of the basin. In the northeastern part of the San Juan Basin, the maximum thickness of the aquifer is approximately 3500 feet (USGS, 2001). This aquifer contains fresh to moderately saline water.

Groundwater generally flows toward the San Juan River and it tributaries, where it becomes alluvial groundwater or is discharged to stream flow. Additional information regarding the Hydrogeologic setting can be found in the provided references.

**Site Specific Information:** 

Surface Hydrology: The pit is located in uplands on a western slope. According to

topographic maps, there is a drainage located less than 200 feet north of the pit. However field inspections at the time the well pad was sited indicate this drainage to be insignificant with no well defined channel or

banks for some 1000+feet west of the site.

1st Water Bearing Formation:San Jose, TertiaryFormation Thickness:Approximately 2200 ft.Underlying Formation:Nacimiento, Tertiary

**Depth to Groundwater:** Depth to groundwater is estimated at greater than 100 feet bgs. The four

nearest iWATERS wells for which water depth information was available were located between 3.5 and 7 miles from the pit. All of these wells have recorded depth to groundwater between 210 and 750 feet. (see

Siting Criteria Map I for details).

### **References:**

Allen, Erin. Undated. Colorado Plateau Aquifers.

http://academic.emporia.edu/schulmem/hydro/TERM%20PROJECTS/2007/Allen/Aquifer.html.

New Mexico Energy, Minerals and Natural Resources Department, Division of Mining and Minerals. Database. 2008. Internet accessed October 2008.

New Mexico Office of the State Engineer. October 2008. iWaters database. Internet accessed August 2008.

New Mexico WQCC. 2005. State of New Mexico Water Quality Act and the Water Control Commission Regulations.

United States Department of Agriculture, Forest Service. 2008. Final Environmental Impact Statement for Surface Management of Gas Leasing and Development. Jicarilla Ranger District, Carson National Forest, Rio Arriba County, New Mexico.


United States Department of the Interior. Bureau of Land Management. 2003. Final Farmington Resource Management Plan and Final Environmental Impact Statement. Farmington Field Office, Farmington, New Mexico.

United States Department of the Interior. Bureau of Indian Affairs. 2008. BIA, Jicarilla Agency and Jicarilla Apache Nation information for GIS databases. Dulce, New Mexico.

United States Geological Survey. 2001. Groundwater Atlas of the United States: Arizona, Colorado, New Mexico and Utah. USGS Publication HA 730-C; <a href="http://capp.water.usgs.gov">http://capp.water.usgs.gov</a>.

Page 7 of 19 Jaeco 26-3 22 #1A

Township: 26N Range: 03W Sections:
NAD27 X: Y: Zone: Search Radius:
County: Number: Suffix:
Owner Name: (First) (Last) Non-Domestic Domestic All
POD / Surface Data ReportAvg Depth to Water ReportWater Column Report
WATER COLUMN REPORT 10/01/2008
(quarters are 1=NW 2=NE 3=SW 4=SE) (quarters are biggest to smallest)  Depth Depth Water
(in feet)         POD Number       Tws Rng Sec q q q Zone       X       Y Well Water Column
No Records found, try again
New Mexico Office of the State Engineer POD Reports and Downloads
Township: 26N Range: 04W Sections:
NAD27 X: Y: Zone: Search Radius:
County: Basin: Number: Suffix:
Owner Name: (First) (Last) C Non-Domestic C Domestic All
POD / Surface Data ReportAvg Depth to Water ReportWater Column Report
WATER COLUMN REPORT 10/01/2008
(quarters are 1=NW 2=NE 3=SW 4=SE) (quarters are biggest to smallest) Depth Depth Water
(in feet)  POD Number Tws Rng Sec q q q Zone X Y Well Water Column
No Records found, try again

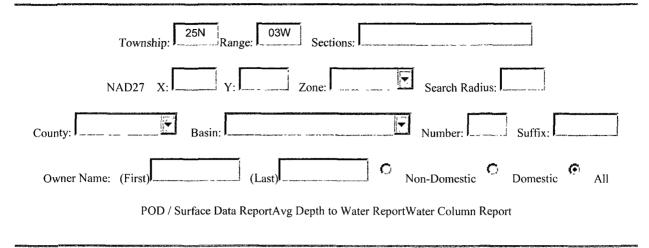

# WATER COLUMN REPORT 10/01/2008

(quarters are 1=NW 2=NE 3=SW 4=SE)
(quarters are biggest to smallest)

(qu	arter	s are	s pr	gge	SC	LO	smallest)			peptn	Depth	water	(in reet)
POD Number	Tws	Rng	Sec	q	q ç	I	Zone	X	Y	Well	Water	Column	
RG 79470	25N	03W	24	4	4 4	l l				504	125	379	
RG 45161	25N	03W	33	3	4 1	L				640	165	475	
RG 49658	25N	03W	36	1	4 4	l				160	18	142	
SJ 02203	25N	03W	01	2	4					665	245	420	
SJ 01305	25N	03W	8 0	3	1 3	3				750	265	485	
SJ 02695	25N	03W	13	1	2 3	3				510	225	285	
SJ 02224	25N	03W	18	1	1 4	1				325	56	269	
SJ 02520	25N	03W	22	2	2 3	3				1000	850	150	
SJ 02520 DCL	25N	03W	22	2	2 3	3				1000	850	150	
SJ 02949	25N	03W	23	4	1 4	ŀ				260	75	185	
SJ 02414	25N	03W	25	2	1 2	2				250	130	120	
SJ 03228	25N	03W	25	2	2 1	L				550	160	390	
SJ 03231	25N	03W	25	3	2 4	1				335	90	245	
SJ 02416	25N	03W	26	1	4 4	l				150	110	40	
SJ 02519	25N	03W	27	2	1 3	3				1215	650	565	
SJ 02519 DCL	25N	03W	27	2	1 3	3				1215	650	565	
SJ 02517 DCL	25N	03W	32	1	3 2	2				250	100	150	
SJ 02517	25N	03W	32	1	3 2	2				250	100	150	
SJ 02518 DCL	25N	03W	33	1	2 4	ł				250	110	140	
SJ 02415	25N	03W	35	2	4 2	2				50	30	20	
SJ 01453	25N	03W	36	2	2					132	70	62	
SJ 02076	25N	03W	36	4	4 2	2				295	75	220	

Record Count: 22

Township: 27N Range: 04W Sections:
NAD27 X: Zone: Search Radius:
County: Basin: Number: Suffix:
Owner Name: (First) (Last) Non-Domestic C Domestic All
POD / Surface Data ReportAvg Depth to Water ReportWater Column Report

# WATER COLUMN REPORT 10/01/2008


(quarters are 1=NW 2=NE 3=SW 4=SE) (quarters are biggest to smallest) Depth Depth Water (in feet) POD Number Water Tws Rng Secqqq Zone Well Column SJ 00048 27N 04W 01 143 SJ 01049 27N 04W 18 4 2 2 15 SJ 01205 27N 3054 04W 34 4 4 4 750 2304

Record Count: 3


because the solid or the solid or the solid or the solid or	AND THE CONTRACTOR OF STREET, SAND THE SAND TH		**************************************			***************************************		a exercise de la company de la			entropy and the second
	Tow	nship: 2	7N Range	03W	Sections:	Parameter in a measurement resistant		and the second s			
	NAD27	, <sub>X:</sub>	Y: -	Z	one:	X	Search Ra	ndius:			
County	September 200 Marie Septem	t •	Basin:			Ε	Number:	Su	ffix:		
Owne	er Name: (Firs	t)	(	Last)		o No	n-Domesti	c C Dor	nestic ©	All	
	1	POD / Surf	ace Data Re	portAvg Do	epth to Water	ReportWa	ter Columi	n Report			
alland constitutivanica cunto alumbaturunua		несторово артоме суднае уда возрада создада с	WATE	R COLUMN	REPORT	10/01/20	08		ATTECHNESIS SOUTH CO POST M		
POD Number	(quarter	s are b	=NW 2=NE iggest to c q q q			Y	Depth Well	Depth Water	Water Column	(in	feet)
No Records fou	ınd, try ag	ain									
			<b>N</b> / /	Marrian OG	Goodfaa Cta						
					ice of the Starts and Dow		er				
		www.completerischeinschein zu der der Steinbertreitschein		and the second s					and the state of t		***************************************
	Tow	vnship:	26N Range:	02W	Sections:						
	NAD27	X:	Y:	Z	one:		Search Ra	idius:	A Barbaran ( ) i		
County		¥	Basin:				Number:	Su	ffix:		T Target on the state of the st
Owne	er Name: (Firs	t)		Last)		C No	n-Domestic	c O Dor	mestic <b>©</b>	All	
	1	POD / Surf	face Data Re	portAvg De	epth to Water	· ReportWa	ter Columi	n Report			
the integral difference and another than the health high			conservations of tolinor (uncertainty sheet sheet	Останов биломического спостом ст				AND THE RESERVE OF THE PERSON	and the second s		Раумента
			WATE	R COLUMN	REPORT	10/01/20	80				
	(quarter	s are 1	=NW 2=NE	3=SW 4=	SE)						
DOD March and	_		iggest to			••	Depth	Depth	Water	(in	feet)
POD Number SJ 02963	<b>Tws</b> 26N	02W 02	<b>qqq</b> 332	Zone	Х	Y	<b>Well</b> 1300	Water	Column		
SJ 03102	26N	02W 04	1 4 1				630	210	420		
SJ 02842	26N	02W 10	4 1 1		· · · · · · · · · · · · · · · · · · ·		7603				
SJ 02889	26N	02W 12	3 3				7658				
SJ 03489 SJ 02449	26N 26N	02W 14 02W 21	2 2 2 4 1 4				600 605	350	255		
SJ 02101	26N	02W 21	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$				600	150	255 450		
SJ 03425	26N	02W 22	4 1 4				1500	*	200		
SJ 00419	26N	02W 22	4 4 1				160	15	145		
SJ 02964 SJ 02905	26N 26N	02W 23 02W 24					342 500	150 100	192 320		
DU U43U3	∠bN	∪∠w ∠4	233				500	180	320		

Record Count: 11

# Siting Criteria Map I Water Wells, Cathodic Wells, & Springs Williams Exploration and Production Company Jaeco 26-3 22 #1A T26N, R3W, Section 22, NMPM Rio Arriba County, New Mexico

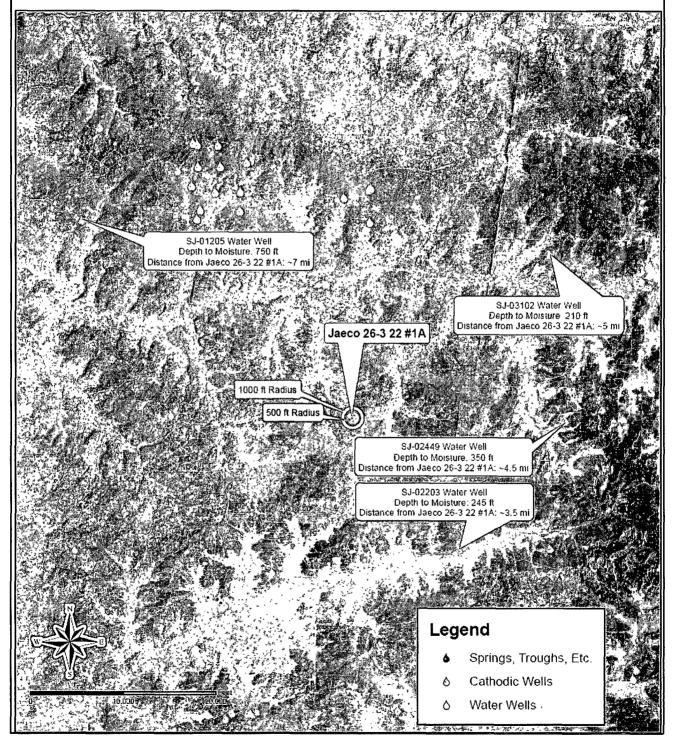

# Siting Criteria Map II Topographic Features Williams Exploration and Production Company Jaeco 26-3 22 #1A T26N, R3W, Section 22, NMPM Rio Arriba County, New Mexico

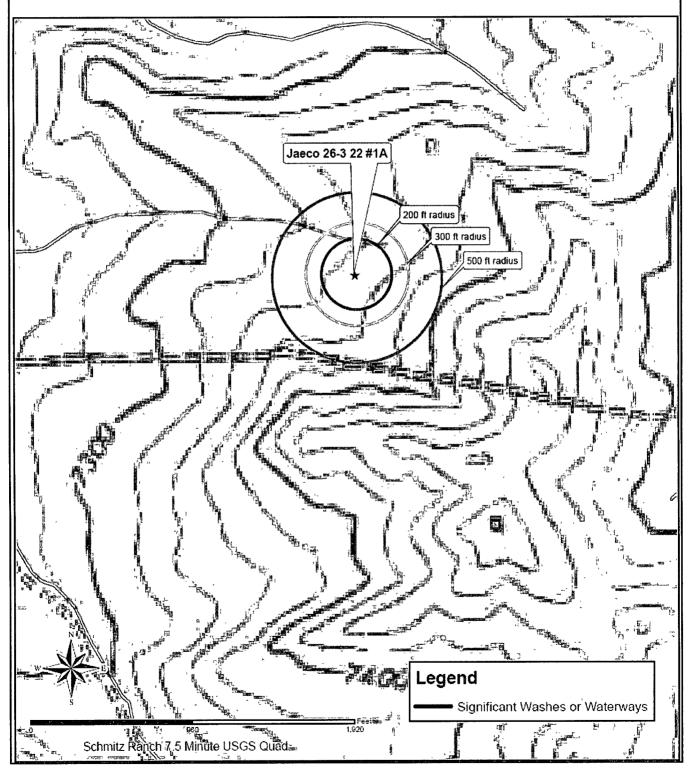


# FEMA Map - 100-Year Floodplain:

As this location is within the Jicarilla Reservation, FEMA maps are not available for the site. However, ortho and topographic maps indicate that the location is not within a floodplain.

# Siting Criteria Compliance Demonstrations:

The JAECO 26-3 22 #1A is not situated over a mine or a steep slope (see attached New Mexico Mines, Mills, and Quarries Map). Excavated pit material will not be located within 300 feet of a continuously flowing water course. The USFWS has not digitally mapped this area for wetlands, but topographic and ortho maps indicate that this upland region is not within 500 feet of any riparian areas or wetlands (see Siting Criteria Map II). The pit is not within 500 feet of any private, domestic fresh water well or spring or within 1000 feet of any other fresh water well or spring (see Siting Criteria Map I). The pit will not be within any incorporated municipal boundaries or defined municipal freshwater well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. The location of the pit is not within 300 feet of any permanent residence, school, hospital, institution, or church. Based on field inspections at the time of the well permitting and pad location there are no significant water courses within 200 feet of a pad or proposed pit.

# **MMQonline Public Version**

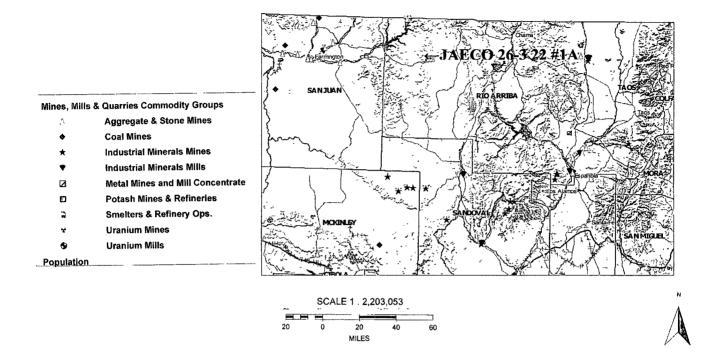

# Williams Production Co., LLC San Juan Basin: New Mexico Assets

Temporary Pit Maintenance & Operating Plan Drilling/Completion and Workover

In accordance with Rule 19.15.17 NMAC, the following plan describes the general operations and maintenance (O&M)of temporary pits on Williams Production Co, LLC (WPX) locations in the San Juan Basin of New Mexico. This is WPX's standard procedure for all temporary pits to be utilized for the drilling, completion and/or workover of oil and gas wells operated by WPX. For those temporary pits which do not conform to this standard O&M plan, a separate well specific O&M plan will be developed and utilized.

### General Plan Requirements:

- 1. WPX will operate and maintain a temporary pit to contain liquids and solids associated with drilling, completion and workover of oil and gas wells which will prevent contamination of fresh water resources and protect public health and the environment.
- 2. WPX will to the extent practical conserve drilling fluids for reuse by transferring liquids to pits ahead of the rigs. All other fluids will be disposed by evaporation or transport to Basin Disposal, Inc in Bloomfield, New Mexico (Permit # NM-01-005).
- 3. WPX shall maintain at least two (2) feet of vertical freeboard for a temporary pit.
- 4. WPX shall remove all free liquids from a temporary pit within 30 days from the date the drilling or workover rig is released.
- 5. Only fluids and solids generated during the drilling/completion/workover process may be discharged into a temporary pit. Other miscellaneous solid waste or debris will not be allowed.
- 6. WPX will not discharge or store any hazardous waste as defined under RCRA 40CFR 261 and 19.15.1.7.W(3) NMA in any temporary pit.
- 7. If any pit liner's integrity is compromised, or if any penetration of the liner occurs:
  - a. Above the liquid's surface, WPX shall repair the damage or replace the liner as necessary. WPX will notify the NMOCD Aztec District Office by phone or email within 48-hours of discovery.
  - b. Leak below the liquid's surface, WPX shall suspend operations, remove all liquids above the damaged liner within 48 hours, and repair the damage or replace the liner. WPX will notify and report to NMOCD as follows:
    - i. If the release is less than 25 bbls, the Aztec District Office by phone or email within 48-hours of discovery and repair.
    - ii. If the release is suspected to be greater than 25 bbls, the Aztec District Office and the Environmental Bureau Chief by phone for immediate verbal notification pursuant to 19.15.3.116.B (1)(d).
  - c. Written Spill/Release reports will be submitted on Form C-141 per 19.15.3.116.C NMAC within 15 days to the Aztec District Office.
- 8. The liner shall be protected from any fluid force or mechanical damage through the use of mud pit slides (secondary liner placed over the primary liner), and/or a manifold system.
- 9. Diversion ditches, around the location or around the perimeter of the pit, shall be maintained as protection from run-on.
- 10. WPX shall immediately remove any visible layer of oil from the surface of a temporary pit following cessation of drilling/completion/workover operations. Oil absorbent booms will be utilized to contain and remove oil. An oil absorbent boom will stored on-site until the pit is covered.
- 11. WPX will inspect the temporary pits as follows to ensure compliance with this plan:
  - d. Daily during drilling or workover operations. Inspections will be included with the IADC reports.
  - e. Weekly as long as liquids remain in the pit. Electronic copies of the inspections will be kept at the WPX San Juan Basin office.
  - f. Copies of the inspections will be filed with the NMOCD Aztec District office upon pit closure.
- 12. WPX shall remove all free liquids from a blow/flare (cavitation) pit within 48 hours after completing operations. WPX may request additional time to remove liquids from the Aztec District office if it is not feasible to meet the 48 hour requirement.

# Williams Production Co., LLC San Juan Basin: New Mexico Assets

Temporary Pit In-place Closure Plan Drilling/Completion and Workover (Groundwater > 100 feet bgs)

In accordance with Rule 19.15.17.13 NMAC, the following plan describes the general in-place closure requirements of temporary pits on Williams Production Co, LLC (WPX) locations in the San Juan Basin of New Mexico. This is WPX's standard procedure for all temporary pits to be utilized for the drilling, completion and/or workovers of oil and gas wells operated by WPX. For those temporary pits which do not conform to this standard closure plan, a separate well/pit-specific closure plan will be developed and utilized.

All closure activities will include proper documentation and will be submitted to OCD within 60 days of the pit closure on a Closure Report using Division Form C-144. The Report will include the following:

- Details on Capping and Covering, where applicable
- Plot Plan (Pit Diagram)
- Inspection reports
- Sampling Results
- Division Form C-105: WELL COMPLETION OR RECOMPLETION REPORT AND LOG
- Copy of Deed Notice filed with the County Clerk (formatted to meet County requirements)

# General Plan Requirements:

- 1. All free-standing liquids will be removed from the pit at the start of the closure process. Liquids will be removed in a manner that the appropriate District Office approves including: recycled, reused, reclaimed, evaporated, and/or disposed of in a Division-approved facility. Once all free liquids are removed, the sludge will be stabilized by one of the following methods depending on equipment availability: blending with clean stockpiled soils or dewatering using a Bowl Decanter Centrifuge, then blending with clean stockpiles soils.
- 2. The preferred method of closure for all temporary pits will be on-site closure by in-place burial, provided all the criteria in 19.15.17.13.B are met.
- 3. The surface owner shall be notified of WPX's proposed closure plan using a means that provides proof of notice (i.e. certified mail/return receipt requested).
- 4. Within six months of the "rig-off" status occurring, WPX will ensure that the temporary pit is covered and recontoured, and that reseeding is in progress.
- 5. Notice of Closure will be given to the Aztec District office between 72 hours and one week of the scheduled closure via email or phone. The notification of closure will include the following:
  - g. Operator's Name (WPX)
  - h. Well Name and API Number
  - i. Location (USTR)
- 6. The pit liner shall be removed above "mud level" after stabilization. Removal of the liner will consist of manually or mechanically cutting the liner at the mud level and removing all remaining liner. Care will be taken to remove "all" of the liner (i.e. anchored material). All excessive liner will be disposed of at a licensed disposal facility (probably San Juan Regional Landfill, operated by Waste Management under NMED Permit SWM-052426).

- 7. Solidification of the remaining pit contents shall be achieved by mixing non-waste-containing, earthen material. The solidification process will be accomplished using a combination of natural drying and mechanical mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed safe and stable. The mixing ratio shall not exceed 3 parts non-waste to 1 part pit contents.
- 8. A five-point composite sample will be taken of the pit using sampling tools; all samples will be tested per 19.15.17.13(B)(1)(b) NMAC. In the event that the criteria are not met (See Table 1), all contents will be handled per 19.15.17.13(B)(1)(a) (i.e. dig and haul to a Division-approved facility). Approval to haul will be requested of the Aztec District office prior to initiation.

Table 1: Closure Criteria for Temporary Pits in Non-sensitive Areas

Components	Testing Methods	Closure Limits (mg/Kg)
Benzene	EPA SW-846 Method 8021B or 8260B	0.2
BTEX	EPA SW-846 Method 8021B or 8260B	50
TPH	EPA SW-846 Method 8015 M(Full Range)*	2500
	or Method 418.1	
GRO/DRO	EPA SW-846 Method 8015M (GRO/DRO)	500
Chlorides	EPA SW-846 Method 300.1	1000

<sup>\*</sup> Preferred method

- 9. Upon completion of solidification and testing, the pit area will be backfilled with non-waste, earthen material compacted to native conditions to enable effective revegetation for successful evapotranspiration. A minimum of four feet of cover will be used, including replacement of one foot of suitable material to establish vegetation, or the background thickness of topsoil, whichever is greater.
- 10. Following cover, the site will be recontoured to meet the Surface Management Agency or surface owner requirements. Re-contouring will attempt to match fit, shape, line form, and texture of the surrounding geography. Re-shaping will provide drainage control, prevent ponding, and minimize erosion. Natural drainages will be unimpeded and stormwater Best Management Practices (BMPs) will be used to aid in soil stabilization and protect surface water quality.
- 11. Notification will be sent to the Aztec District office when the reclaimed area is seeded.
- WPX shall seed the disturbed areas the first growing season after the pit is covered. Seeding will be accomplished via drilling on the contour whenever practical, or by other Division-approved methods. Vegetative cover will equal 70% of the native perennial vegetative cover (unimpacted), consisting of at least three native plant species, including at least one grass, but not including noxious weeds. Cover will be maintained through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs. Note: WPX assumes the seeding stipulations, including mix and seeding methods, specified by the Surface Management Agency (BLM, BOR, USFS, Tribal, etc.) or Landowner as part of a surface use agreement or APD are Division-approved methods unless notified by the Division of their unacceptability.
- 13. Upon the abandonment of all wells on the pad, the temporary pit will be located with a steel marker no less than four inches in diameter, cemented in a hole three feet deep in the center of the on site burial. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the on site burial of the temporary pit. The plate will be easily removable and a four-foot tall riser will be threaded into the top of the collar marker and welded around the base with the operations information at the time of all wells on the pad abandoned. The information will include Operator Name, Lease Name, Well Name and number, USTR, and an indicator that the marker is an onsite pit burial location.