District I

1625 N French Dr., Hobbs, NM 88240

District II

1301 W Grand Ave, Artesia, NM 88210

1000 Rio Brazos Rd, Aztec, NM 87410

District IV

1220 S St Francis Dr , Santa Fe, NM 87505

#### State of New Mexico Energy Minerals and Natural Resources

Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-144 July 21, 2008

For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office

181	41	4

### Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

Type of action:	Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method
	Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method
	Modification to an existing permit
	X Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system,
	below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water of the

environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances
Operator: Burlington Resources Oil & Gas Company, LP OGRID#: 14538
Address: PO Box 4289, Farmington, NM 87499
Facility or well name: Johnston A Com C 9N
API Number: 30-039-30388 OCD Permit Number
U/L or Qtr/Qtr: E(SWNW) Section: 36 Township: 27N Range: 6W County: Rio Arriba
Center of Proposed Design: Latitude: 36.53495' N Longitude: 107.41288' W NAD: 1927 X 1983
Surface Owner: Federal X State Private Tribal Trust or Indian Allotment
X   Pit: Subsection F or G of 19.15.17.11 NMAC     Temporary
Closed-loop System: Subsection H of 19 15.17.11 NMAC  Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)  Drying Pad Above Ground Steel Tanks Haul-off Bins Other  Lined Unlined Liner type Thickness mil LLDPE HDPE PVD Other  Liner Seams Welded Factory Other
Liner Seams   Welded   Factory   Other      Below-grade tank:   Subsection 1 of 19.15.17.11 NMAC     Volume   bbl   Type of fluid     Tank Construction material:     Secondary containment with leak detection   Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off     Visible sidewalls and liner   Visible sidewalls only   Other     Liner Type   Thickness   mil   HDPE   PVC   Other
Alternative Method:  Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Fencing: Subsection D of 19.15 17.11 NMAC (Applies to permanent pn, temporary pits, and below-grade tanks)  Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, instead of barbed wire evenly spaced between one and four feet  X Alternate. Please specify 4' hogwire fence with a single strand of barbed wire on top.	uutton or chur	ch)
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)  Screen Netting Other  Monthly inspections (If netting or screening is not physically feasible)		
Signs: Subsection C of 19 15.17.11 NMAC  12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers  X Signed in compliance with 19.15.3 103 NMAC		
Administrative Approvals and Exceptions:  Justifications and/or demonstrations of equivalency are required Please refer to 19.15.17 NMAC for guidance.  Please check a box if one or more of the following is requested, if not leave blank:  Administrative approval(s): Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for consideration of approval.	aderation of ap	proval.
Siting Criteria (regarding permitting): 19.15.17.10 NMAC  Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.		
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes	XNo
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	Yes	<b>X</b> No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applies to temporary, emergency, or cavitation puts and below-grade tanks)	☐Yes ☐NA	XNo
<ul> <li>Visual inspection (certification) of the proposed site; Aerial photo; Satellite image</li> <li>Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.</li> <li>(Applied to permanent pits)</li> <li>Visual inspection (certification) of the proposed site; Aerial photo; Satellite image</li> </ul>	Yes XNA	□No
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	Yes	XNo
<ul> <li>NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site.</li> <li>Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended</li> <li>Written confirmation or verification from the municipality; Written approval obtained from the municipality</li> </ul>	Yes	XNo
Within 500 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site  Within the area overlying a subsurface mine.  - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	☐Yes ☐Yes	X No X No
Within an unstable area.  - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	Yes	XNo
Within a 100-year floodplain - FEMA map	Yes	XNo

Form C-144 Oil Conservation Division Page 2 of 5

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19 15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC
Tyungeologic Neport (Delow-grade Tailis) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NWAC   X   Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9
National Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
X Dosign Plan - based upon the appropriate requirements of 19.15.17.10 NMAC
X Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
X Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15 17.9 NMAC and 19 15.17.13 NMAC
Previously Approved Design (attach copy of design)  API or Permit
12
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19 15.17.9 NMAC Instructions Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17 9
Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC
Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17 12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15.17 9  NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design)  API
Previously Approved Operating and Maintenance Plan API
13
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17 9 NMAC
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15.17.9 NMAC
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
Climatological Factors Assessment
Certified Engineering Design Plans - based upon the appropriate requirements of 19 15.17.11 NMAC
Dike Protection and Structural Integrity Design. based upon the appropriate requirements of 19.15.17.11 NMAC
Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC  Quality Control/Quality Assurance Construction and Installation Plan
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19 15.17.11 NMAC
Nuisance or Hazardous Odors, including H2S, Prevention Plan
Emergency Response Plan
Oil Field Waste Stream Characterization
Monitoring and Inspection Plan
Erosion Control Plan
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15 17 13 NMAC
14
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type: XDrilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System  Alternative
Proposed Closure Method. Waste Excavation and Removal
Waste Removal (Closed-loop systems only)
X On-site Closure Method (only for temporary pits and closed-loop systems)
X In-place Burnal On-site Trench
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
15
Waste Excavation and Removal Closure Plan Checklist: (19.15.17 13 NMAC) Instructions: Each of the following items must be attached to the closure plan.
Please indicate, by a check mark in the box, that the documents are attached.
Protocols and Procedures - based upon the appropriate requirements of 19.15.17 13 NMAC
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) ☐ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17 13 NMAC
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15.17.13 NMAC
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15 17 13 NMAC

Form C-144 Oil Conservation Division Page 3 of 5

16 Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Ta		
Instructions: Please identify the facility or facilities for the disposal of liquids, drilling fluid are required	s and drill cuttings. Use attachment if more than two fac	ilities .
Disposal Facility Name Dis	posal Facility Permit #	
	posal Facility Permit #:	
Will any of the proposed closed-loop system operations and associated activities occurred. Yes (If yes, please provide the information No	cur on or in areas that will not be used for future ser	vice and operations?
Required for impacted areas which will not be used for future service and operations:  Soil Backfill and Cover Design Specification - based upon the appropriate re Re-vegetation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsect	Tof 19.15.17.13 NMAC	
17		
Siting Criteria (Regarding on-site closure methods only: 19.15.17 10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Reconcertain siting criteria may require administrative approval from the appropriate district office or may for consideration of approval. Justifications and/or demonstrations of equivalency are required. Plantage of the consideration of approval.	y be considered an exception which must be submitted to the So	
Ground water is less than 50 feet below the bottom of the buried waste.		Yes X No
- NM Office of the State Engineer - IWATERS database search; USGS: Data obtained	from nearby wells	∐N/A
Ground water is between 50 and 100 feet below the bottom of the buried waste		Yes X No
- NM Office of the State Engineer - iWATERS database search; USGS, Data obtained	from nearby wells	□N/A
Ground water is more than 100 feet below the bottom of the buried waste.		X Yes No
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained	from nearby wells	□N/A
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant v (measured from the ordinary high-water mark).	vatercourse or lakebed, sinkhole, or playa lake	Yes X No
- Topographic map; Visual inspection (certification) of the proposed site		·
Within 300 feet from a permanent residence, school, hospital, institution, or church in existe - Visual inspection (certification) of the proposed site; Aerial photo; satellite image	ence at the time of initial application.	Yes X No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than fiv purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence - NM Office of the State Engineer - iWATERS database; Visual inspection (certification	at the time of the initial application.	Yes XNo
Within incorporated municipal boundaries or within a defined municipal fresh water well find pursuant to NMSA 1978, Section 3-27-3, as amended.		Yes X No
<ul> <li>Written confirmation or verification from the municipality; Written approval obtained</li> <li>Within 500 feet of a wetland</li> <li>US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection</li> </ul>		Yes XNo
Within the area overlying a subsurface mine	(commence), or the proposed one	Yes X No
- Written confirantion or verification or map from the NM EMNRD-Mining and Miner	al Division	
Within an unstable area.  - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral	Resources; USGS; NM Geological Society;	Yes X No
Topographic map Within a 100-year floodplain - FEMA map		Yes X No
On-Site Closure Plan Checklist: (19.15.17 13 NMAC) Instructions: Each of the by a check mark in the box, that the documents are attached.	e following items must bee attached to the closure	plan. Please indicate,
X Siting Criteria Compliance Demonstrations - based upon the appropriate req	uirements of 19.15.17.10 NMAC	
X Proof of Surface Owner Notice - based upon the appropriate requirements of		
Construction/Design Plan of Burial Trench (if applicable) based upon the ap	propriate requirements of 19.15.17.11 NMAC	
Construction/Design Plan of Temporary Pit (for in place burial of a drying page 1)	ad) - based upon the appropriate requirements of 19.	15.17.11 NMAC
X Protocols and Procedures - based upon the appropriate requirements of 19.15	5.17 13 NMAC	İ
Confirmation Sampling Plan (if applicable) - based upon the appropriate req		
Waste Material Sampling Plan - based upon the appropriate requirements of		
X Disposal Facility Name and Permit Number (for liquids, drilling fluids and d	•	ot be achieved)
<ul> <li>Soil Cover Design - based upon the appropriate requirements of Subsection</li> <li>Re-vegetation Plan - based upon the appropriate requirements of Subsection</li> </ul>		
X Site Reclamation Plan - based upon the appropriate requirements of Subsection		

Form C-144 Oil Conservation Division

19	Contification			,
Operator Application  Thereby certify that the in	formation submitted with this application is true, acc	curate and complete to the	e hest of my knowledge and belief	
Name (Print):	Crystal Tafoya	Title	Regulatory Technician	
Signature:	1 LOT 6	Date:	10/3/08	=
e-mail address	crystal.tatiova@conocophillips.com	Telephone	505-326-9837	-
e-mail address	Grystal tarbya @ Corlocoprillips.com	recphone	• 505-520-9837	
20 OCD Approval: OCD Representative S	Permit Application (including closure plan)	"—	OCD Conditions (see attachment)  Approval Date:	09
-	noiro/spec			00
Title:	nuiro/spec	OCD Per	mit Number:	
Instructions. Operators as report is required to be su	ired within 60 days of closure completion): Sut re required to obtain an approved closure plan prior abmitted to the division within 60 days of the complet is been obtained and the closure activities have been o	to implementing any closion of the closure activiticompleted	sure activities and submitting the closure report.	
22				
Closure Method:  Waste Excavation	and Removal On-site Closure Method pproved plan, please explain	Alternative Closur	e Method Waste Removal (Closed-loop sy	stems only)
Instructions: Please ident were utilized.  Disposal Faculity Nam Disposal Faculity Nam Were the closed-loop s  Yes (If yes, please Required for impacted Site Reclamation Soil Backfilling an	e: system operations and associated activities performed	Disposal Facilit  Disposal Facilit  Disposal Facilit  On or in areas that will n	tings were disposed. Use attachment if more that y Permit Number: y Permit Number.	n two facilities
the box, that the docu.  Proof of Closure Proof of Deed N Plot Plan (for on Confirmation Sa Waste Material S Disposal Facility Soil Backfilling Re-vegetation A	Notice (surface owner and division) otice (required for on-site closure) -site closures and temporary pits) mpling Analytical Results (if applicable) Sampling Analytical Results (if applicable) Name and Permit Number and Cover Installation pplication Rates and Seeding Technique in (Photo Documentation)	llowing items must be att	ached to the closure report. Please indicate, by  NAD 1927	a check mark in
•	tification: formation and attachments submitted with this closur all applicable closure requirements and conditions s <sub>i</sub>			elief. I also certify that
Name (Print):		Title:		
Signature:		Date:		
e-mail address.		Telephone:		<del></del>

Township: 27N	Range: 06W	Sections:		
NAD27 X:	Y:	Zone:	Search Radius:	
County:	Basin:		Number: Suffix:	
Owner Name: (First)	(La	ast) All	O Non-Domestic O Domestic	
POD/S	urface Data Report	er.Column Rep	ort	
	Clear Form	iWATERS N	Menu Help	

#### WATER COLUMN REPORT 10/02/2008

	(quarter	s are	<b>e 1</b> =1	NW	2:	=NE	3=SW 4=SE)	)				
	(quarter	s are	e bi	gge	est	t t	o smallest)	)		Depth	Depth	Wat∈
POD Number	Tws	Rng	Sec	q	đ	đ	Zone	x	Y	Well	Water	Colun
SJ 03001	27N	06W	07	2	2	1				141	41	1(
SJ 02403	27N	06W	30	3	1	3				505	300	20
SJ_002137	27N	06W	32	1	4	4				1308	(485)	82
SJ-000.62	27N	06W	32	3	3	3				452	73017	15
CSJ_0.0061	27N	06W	32	3	3	3				445	(301)	14

Record Count: 5

Township: 26N Range: 06W Sections: Y: Zone: NAD27 X: Search Radius: County: Basin: Number: Suffix: Non-Domestic Domestic Owner Name: (First) (Last) All POD /. Surface Data Report Avg Depth to Water Report Water Column Report Clear Form iWATERS Menu Help

#### WATER COLUMN REPORT 10/02/2008

(quarters are 1=NW 2=NE 3=SW 4=SE)
(quarters are biggest to smallest)

POD Number Tws Rng Sec q q q Zone X

Depth Depth Wate Well Water Colum

No Records found, try again

	_					
Town	nship: 26N	Range: 05W	Sections:			
NAD27	X:	Y:	Zone:		Search Radius:	
County:		Basin:			Number:	Suffix:
Owner Name: (	First)	(L	ast) <b>③</b> All		O Non-Domestic	O Domestic
وغي	POD./-Su	rface Data Repor	t ter Column Repo	a divinition of street	to Water Report	
		Clear Form	WATERS M	enu	Help	
		W	ATER COLUMN R	EPORT	10/02/2008	in Algemen yakang ujuma antincin serepunyah annang gipertemben yak
POD Number	, –	s are 1=NW 2: s are biggest Rng Sec q q	t to smallest	•	Depth Y Well	Depth Wate Water Colum

No Records found, try again


Township: 27N Range: 05W Sections: NAD27 X: Y: Zone: Search Radius: - County: Basin: Number: Suffix: Owner Name: (First) O Non-Domestic O Domestic (Last) (a) All Avg Depth to Water Report POD / Surface Data Report Water Column Report Clear Form. iWATERS Menu Help


#### WATER COLUMN REPORT 10/02/2008


### (quarters are 1=NW 2=NE 3=SW 4=SE)

	(quarter	s are	e biq	gge	est	t to	smalles	st)		Depth	Depth	Wat€
POD Number	Tws	Rng	Sec	đ	q	<b>q</b>	Zone	x	Y	Well	Water	Colum
RG 81026	27N	05W	27	4	4	3				460	186	27
SJ 00199	27N	05W	03	2	1					1840		
SJ 00046	27N	05W	04	4	4					506	260	24


Record Count: 3

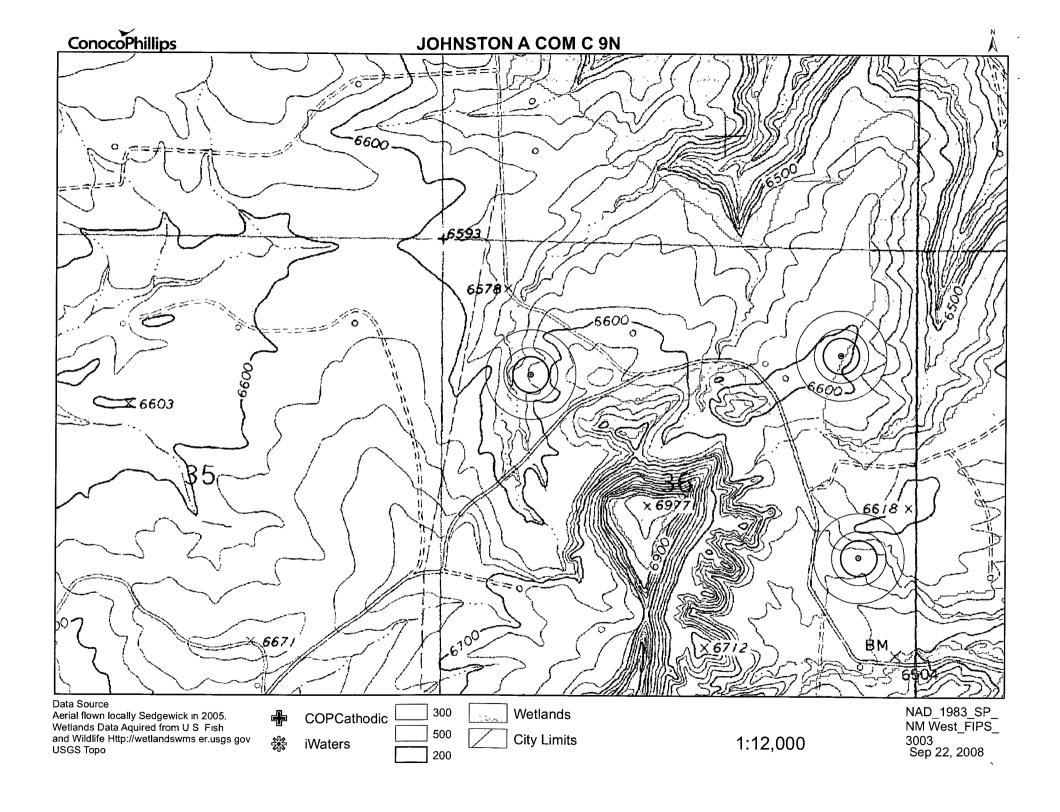


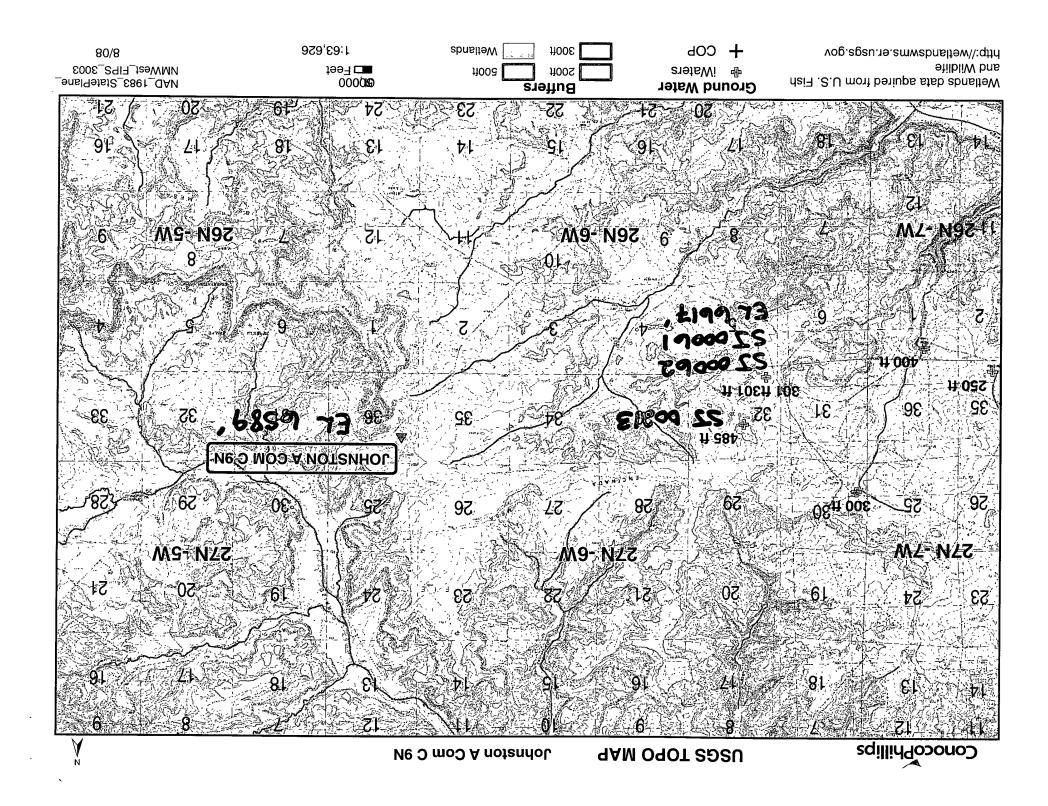


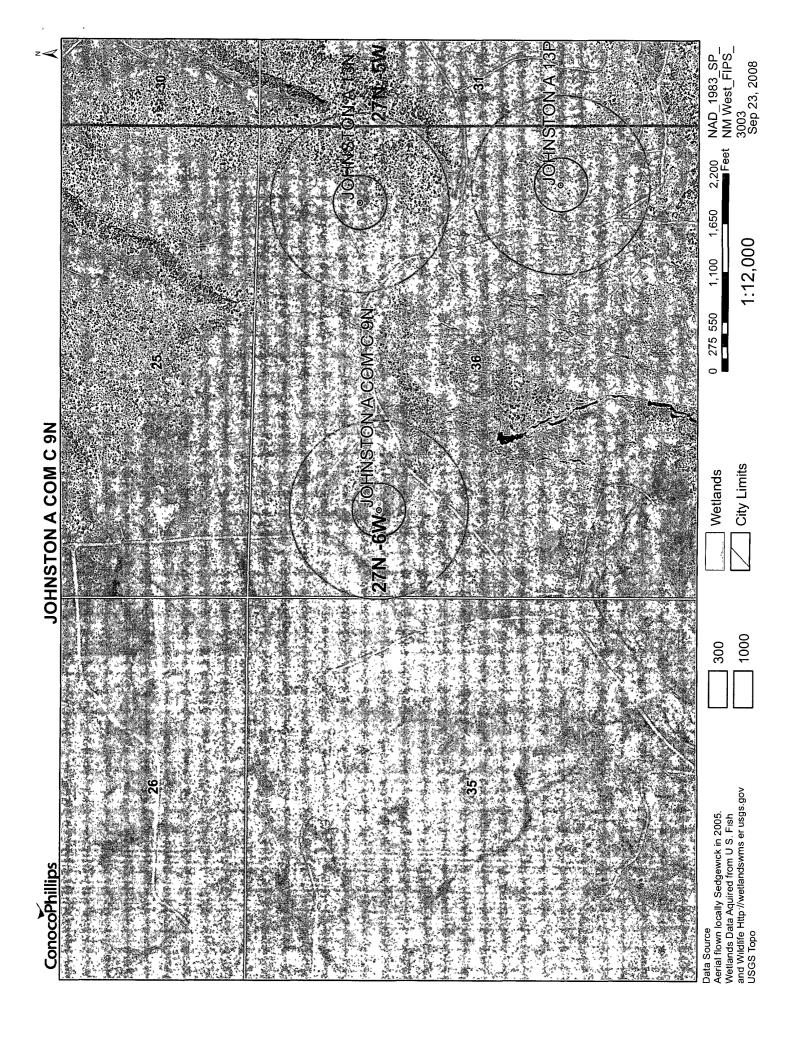


## Johnston A Com C 9N Mines, Mills and Quarries Web Map

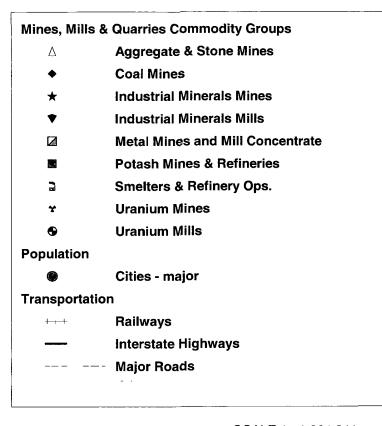

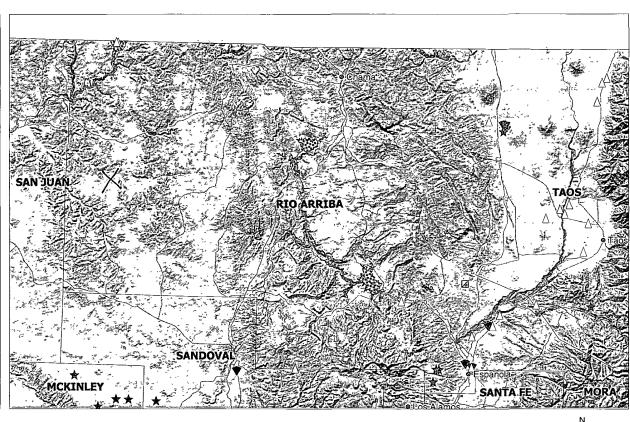





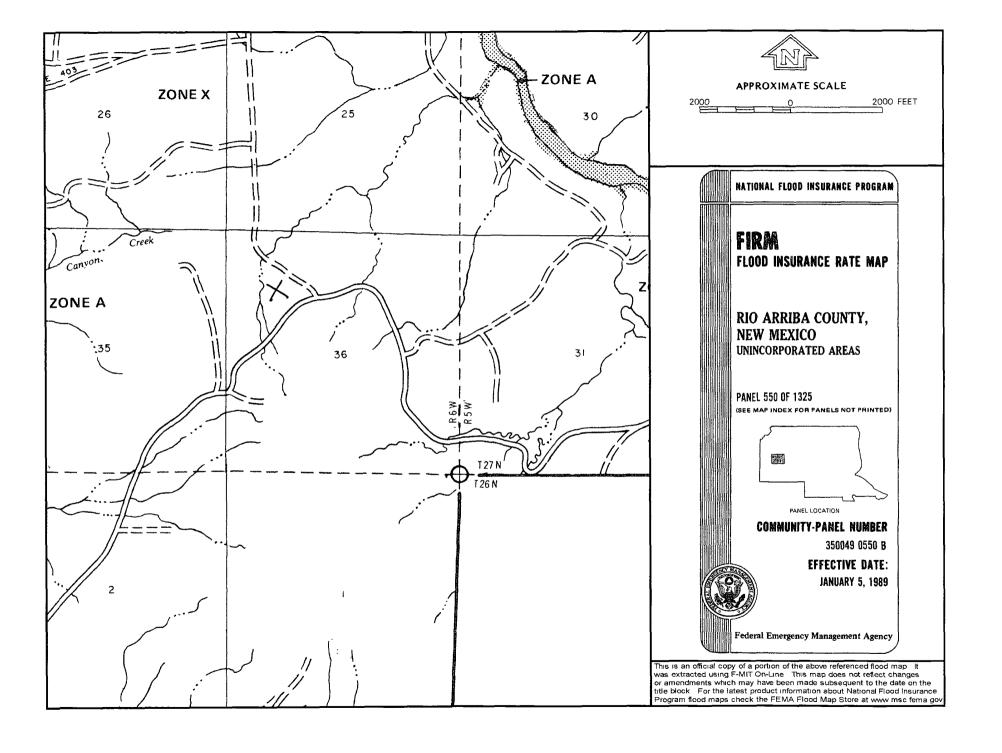

### Hydrogeological report for Johnston A Com C 9N

#### **Regional Hydrogeological context:**

The San Jose Formation of Eocene age occurs in New Mexico and Colorado, and its outcrop forms the land surface over much of the eastern half of the central basin. It overlies the Nacimiento Formation in the area generally south of the Colorado-New Mexico State line and overlies the Animas Formation in the area generally north of the State line.

The San Jose Formation was deposited in various fluvial-type environments. In general, the unit consists of an interbedded sequence of sandstone, siltstone, and variegated shale. Thickness of the San Jose Formation generally increases from west to east (200 feet in the west and south to almost 2,700 feet in the center of the structural basin). Ground water is associated with alluvial and fluvial sandstone aquifers. Thus, the occurrence of ground water is mainly controlled by the distribution of sandstone in the formation. The distribution of such sandstone is the result of original depositional extent plus any post-depositional modifications, namely erosion and structural deformation. Transmissivity data for San Jose Formation are minimal. Values of 40 and 120 feet squared per day were determined from two aquifer tests (Stone et al, 1983, table 5). The reported or measured discharge from 46 water wells completed in San Jose Formation ranges from 0.15 to 61 gallons per minute and the median is 5 gallons per minute. Most of the wells provide water for livestock and domestic use.

The San Jose Formation is a very suitable unit for recharge from precipitation because soils that form on the unit are sandy and highly permeable and therefore readily adsorb precipitation. However, low annual precipitation, relatively high transpiration and evaporation rates, and deep dissection of the San Jose Formation by the San Juan River and its tributaries all tend to reduce the effective recharge to the unit.

Stone et al., 1983, Hydrogeology and Water Resources of the San Juan Basin, New Mexico: Socorro, New Mexico Bureau of Mines and Mineral Resources Hydrologic Report 6, 70 p.

### Siting Criteria Compliance Demonstration & Hydro Geologic Analysis

The Johnston A Com C 9N is not located in an unstable area. The location is not over a mine and is not on the side of a hill as indicated on the Mines, Mills and Quarries Map and Topographic Map. The location of the excavated pit material will not be located within 300' of any continuously flowing watercourse or 200' from any other watercourse as indicated on the Topographic Map. The location is not within a 100-year floodplain area as indicated on the FEMA Map. The subject well has an elevation of 6589'. The iWATERS data points are located 32 and are SJ00213, SJ00062, and SJ00061 with depths of 485' and 301' as indicated on the TOPO Map. The iWATERS data provided the indication of groundwater depth is greater than 100'. The hydro geologic analysis indicates the groundwater depth and the San Jose formation will create a stable area for this new location.

DISTRICT I 1625 N. French Dr., Hobbs, N.M. 86240

## State of New Mexico Energy, Minerals & Natural Resources Department

Form C-102 Revised October 12, 2005

DISTRICT II 1301 W. Grand Avenue, Artesia, N.M. 88210

DISTRICT III 1000 Rio Brazos Rd., Aztec, N.M. 87410 OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505 Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

Certificate Number

10201

☐ AMENDED REPORT

#### DISTRICT IV. 1220 S. St. Francis Dr., Santo Fe, NM 87508

		<u> </u>	W	ELL L		N AND A	CREAGE DE	DICA	•			
	¹ API	Number	**		<sup>a</sup> Pool Code		,	B/	Pool Nam SIN DAK		ICO ME	SAVERDE
	<sup>4</sup> Property 0 (747370 N (47371 D	ode AV,		<u>-I</u>	- ; ,	*Proper JOHNSTON	y Name A COM C	. * We			ell Number 9N	
	70GRID N	<b>a</b> :		BURI	INGTON Ř	*Operato	or Name	)MPANY	' I P		6	Elevation 6589
									<b>1-1</b>	<u>\</u>		0009
UI	or lot no.	Section	Township	Range	Lot Idn	Feet from the	e Location	ne Fee	from the	East/Wes	t line	County
	E	36	27N	6W		1485'	NORTH		975'	WES		RIO ARRIBA
		<u>.</u>		11 Botto	om Hole	Location	If Different	From	Surface			
Ü	L or lot no.	Section	Township	Range	Lot Idn	Pest from the	North/South II	ne Fee	t from the	East/Wes	t line	County
* I	edicated Acr	ės .	39	Joint or	Infill <sup>,</sup>	<sup>14</sup> Consolidatio	ń Code	10,0x	der No.	1.	<del></del>	<u> </u>
	320.00	Acres -	(W/2)					ŀ				
j	NO ALLOY	VABLE W					TION UNTIL A				CEN CO	ONSOLIDATEI
	<u> </u>	<del></del>	OR A NO	ON-STA	NDARD (	JNIT HAS	BEEN APPROV	ED BY			\ OED!	WEIGA MICAL
	N 88'46'5 N 88'46'		2638.0 2638.3						01			TIFICATION tion contained hereis
7	FND 3X BC		<del></del>	0 3X BC	<del>,</del>			<del>]</del> ,	is true of	und complete t and that this o	to the best rpanisation	of my knowledge en either owns a
ı,			ė.	LM 1955		}			land inc	luding the pre	posed batte	eral interest in the m kále location or I
	<u>e</u>	<b>o</b> .				· · · · · · · · · · · · · · · · · · ·			a right t	to drill this w	ell at this	tocation pursuant to
3	2871.02*	<b>2</b>							héretofor	e entered by	the division	
2002.007	8				1	1						
						1			Signatu	ıre.		Date
1	975	_ხ.∫							Printed	Name		
7	ш <b>Е-290</b> -	39	E-290-	-44	1	1		1			R CEI	RTIFICATION
	6	LONG. 107.	138' N (NAD83) 42457' W (NAD	83)	!							ion shown on this p wal surveys made by
3			06338" N (NAD 25.51037" W (I						me or und		lsion, and t	that the same is fru
4	FND 314" BC			3	6 —			_		JULÝ 1	1, 200	7
	FND 3% BC BLM 1955				I	i			Date of	•	d Professio	nal Surveyor.
									182	PR	Ru	SELLI
i						1				JOB.	RUSSA	
	E-290-	-41	E-290-	39		r t					IEX/CO	\{\bar{\}}
l		4			<u> </u>			_	(#	8/ 600	201	\ <b>\\ \</b>
						1				10		SURVEYOR
1					l				\	A. T. S.	)	\$ / S
į						į				POFES	SIONALLA	
						§ 5			1	DAVID F		

### Burlington Resources Oil & Gas Company, LP San Juan Basin Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of pit closure. Closure report will be filed on C-144 and incorporate the following:

- Details on Capping and Covering, where applicable.
- Plot Plan (Pit Diagram)
- Inspection Reports
- · Sampling Results
- C-105
- Copy of Deed Notice will be filed with County Clerk

#### General Plan:

- All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves. The facilities to be used will be Basin Disposal (Permit #NM-01-005) and Envirotech Land Farm (Permit #NM-01-011).
- 2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.
- 3. The surface owner shall be notified of BR's closing of the temporary pit prior to closure as per the approved closure plan via certified mail, return receipt requested.
- 4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.
- 5. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email, or verbally. The notification of closure will include the following:
  - i. Operator's name
  - Location by Unit Letter, Section, Township, and Range. Well name and API number.
- 6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at the San Juan County Landfill located on CR 3100.
- 7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.
- 8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

Components	Tests Method	Limit (mg/Kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	2500
GRO/DRO	EPA SW-846 8015M	<b>_500</b>
Chlorides	EPA 300.1	1000/500
	· · · · · · · · · · · · · · · · · · ·	

- 9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.
- 10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.
- 11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011
- 12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Reshaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 13. Notification will be sent to OCD when the reclaimed area is seeded.
- 14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Туре	Variety or Cultivator	PLS/A
Western wheatgrass	Arriba	3.0
Indian ricegrass	Paloma or Rimrock	3.0
Slender wheatgrass	San Luis	2.0
Crested wheatgrass	Hy-crest	3.0
Bottlebrush Squirreltail	Unknown	2.0
Four-wing Saltbrush	Delar	.25

Species shall be planted in pounds of pure live seed per acre: Present Pure Live Seed (PLS) = Purity X Germination/100 Two lots of seed can be compared on the basis of PLS as follows:

Source No. two (better quality) Source No. One (poor quality) Purity 50 percent Purity 80 percent Germination 40 percent Germination 63 percent Percent PLS 20 percent Percent PLS 50 percent

5 lb. bulk seed required to make 2 lb. bulk seed required to make

1 lb. PLS 1 lb. PLS

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.