District 1 District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
13020 Bill Papara Bond, Artes NM 87410 1000 Rio Brazos Road, Aztec, NM 87410 1220 S. St. Francis Dr., Santa Fe, NM 87505

#### State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office. For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

	7	4	9
--	---	---	---

### Pit Closed-Loon System Relow-Grade Tank or

Proposed Alternative Method Permit or Closure Plan Application		
Proposed Alternative Method Permit or Closure Plan Application  Type of action:  Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method  Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method  Modification to an existing permit  Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method		
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request		
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.		
Operator: Williams Operating Co, LLC OGRID #: 120782		
Address: PO Box 640 / 721 S Main Aztec, NM 87410		
Facility or well name: Rosa Unit #378		
API Number:3003930410 OCD Permit Number:		
U/L or Qtr/Qtr G Section 27 Township 31N Range 5W County: Rio Arriba		
Center of Proposed Design:         Latitude         36.87215         Longitude         -107.34726         NAD:         □ 1927 ⋈ 1983		
Surface Owner: X Federal X State Private Tribal Trust or Indian Allotment		
2.		
∑ <u>Pit</u> : Subsection F or G of 19.15.17.11 NMAC		
Temporary:   Drilling   Workover		
☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A		
☐ Lined ☐ Unlined Liner type: Thickness 20 mil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other		
☐ String-Reinforced		
Liner Seams: ☐ Welded ☐ Factory ☐ Other Volume:		
Closed-loop System: Subsection H of 19.15.17.11 NMAC		
Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)		
Drying Pad Above Ground Steel Tanks Haul-off Bins Other		
□ Lined □ Unlined Liner type: Thicknessmil □ LLDPE □ HDPE □ PVC □ Other		
Type of Operation:		
4.    Below-grade tank: Subsection I of 19.15.17.11 NMAC   Volume: bbl Type of fluid:   Tank Construction material:   Secondary containment with leak detection   Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off		
Volume:bbl Type of fluid:		
Tank Construction material:		
Secondary containment with leak detection  Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off		
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other		
Liner type: Thicknessmil		

Alternative Method:

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)		
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital,		
institution or church)  [ Four foot height, four strands of barbed wire evenly spaced between one and four feet		
☐ Four root relight, rour straints of barbed wire evenly spaced between one and rour rect ☐ Alternate. Please specify per BLM APD Specifications		
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)		
☐ Screen ☐ Netting ☐ Other		
Monthly inspections (If netting or screening is not physically feasible)		
8.		
Signs: Subsection C of 19.15.17.11 NMAC		
12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers		
⊠ Signed in compliance with 19.15.3.103 NMAC		
Administrative Approvals and Exceptions:  Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.  Please check a box if one or more of the following is requested, if not leave blank:  Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau consideration of approval.  Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	office for	
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above-grade tanks associated with a closed-loop system.		
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☑ No	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☒ No	
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applies to temporary, emergency, or cavitation pits and below-grade tanks)  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☑ No ☐ NA	
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applies to permanent pits)  Visual importion (contification) of the proposed site. A cried who to Setallite image.	☐ Yes ☐ No 図 NA	
<ul> <li>Visual inspection (certification) of the proposed site; Aerial photo; Satellite image</li> <li>Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.</li> <li>NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site</li> </ul>	☐ Yes ☑ No	
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☑ No	
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No	
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☑ No	
<ul> <li>Within an unstable area.</li> <li>Engineering measures incorporated into the design; NM Bureau of Geology &amp; Mineral Resources; USGS; NM Geological Society; Topographic map</li> </ul>	☐ Yes ☒ No	
Within a 100-year floodplain FEMA map	☐ Yes ☑ No	

C-144 Page 2 of 16 Rosa #378

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC  Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.  Mydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC  Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC  Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC  Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC  Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC  Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC  Previously Approved Design (attach copy of design) API Number:  or Permit Number:
12.
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC  Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.  Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9  Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC  Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC  Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC  Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number:
Previously Approved Operating and Maintenance Plan API Number: (Applies only to closed-loop system that use
above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC  Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.    Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC   Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC   Climatological Factors Assessment   Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC   Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC   Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC   Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC   Quality Control/Quality Assurance Construction and Installation Plan   Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC   Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC   Nuisance or Hazardous Odors, including H <sub>2</sub> S, Prevention Plan   Emergency Response Plan   Oil Field Waste Stream Characterization   Monitoring and Inspection Plan   Erosion Control Plan   Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.  □ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC  □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC  □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)  □ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC  □ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC

C-144 Page 3 of 16 Rosa #378

Disposal Facility Name:  Disposal Facility Name:  Disposal Facility Permit Number:  Disposal Facility Permit Number:  Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future service and oper Yes (If yes, please provide the information below)   No  Required for impacted areas which will not be used for future service and operations:  Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC  Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC  Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC  Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material to provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is nore than 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  NA  Ground water is more than 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  NA  Ground water is more than 100 feet below the bottom of the proposed site  NA  Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  NA  Ground water is nore than 100 feet below the bottom of the proposed site  NA  Offic	Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.D NMAC)  Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more than two facilities are required.		
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future service and operal yes (If yes, please provide the information below) \  No    No   No   No   No   No   No   No			
Yes (If yes, please provide the information below)   No   Required for impacted areas which will not be used for future service and operations:   Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC   Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC   Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC   Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material approvided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.    Ground water is less than 50 feet below the bottom of the buried waste.			
Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC   Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC   Site Reclamation Plan - Based upon the appropriate distinct office of consideration of acceptable source material of consideration	erations?		
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material of provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is more than 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is more than 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  Topographic map; Visual inspection (certification) of the proposed site  Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  Yes \infty  Yes \infty			
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is between 50 and 100 feet below the bottom of the buried waste  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is more than 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  Topographic map; Visual inspection (certification) of the proposed site  Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  Visual inspection (certification) of the proposed site; Aerial photo; Satellite image  Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  Yes   Yes	or may be		
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is more than 100 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site  Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image  Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  □ Yes □  Yes □	⊠ No		
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site  Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image  Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	⊠ No		
lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site  Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image  Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	☐ No		
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image  Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  Yes ☒	⊠ No		
watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	⊠ No		
- NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	⊠ No		
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality; Written approval obtained from the municipality	⊠ No		
Within 500 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site  □ Yes ☑	⊠ No		
Within the area overlying a subsurface mine.  - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division  □ Yes □	⊠ No		
Within an unstable area.  - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map  □ Yes □	⊠ No		
Within a 100-year floodplain.  - FEMA map  Yes   Yes   ✓	⊠ No		
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please in by a check mark in the box, that the documents are attached.  Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC  Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC  Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC  Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC  Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC  Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC  Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC  Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC  Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	MAC		

f	
Operator Application Certification:  I hereby certify that the information submitted with this application is true, accura	ate and complete to the best of my knowledge and belief.
Name (Print): Michael K. Lane	Title: Sr. EH & S Specialist
Signature:	Date: 9/30/08
e-mail address: <u>myke.lane@williams.com</u>	Telephone: <u>505-634-4219</u>
OCD Approval: Permit Application (including closure plan) Closure Pl	
OCD Representative Signature: Brandon Dwell	Approval Date: 17-3-08
OCD Representative Signature: Brandon Sall  Title: Enviro Spec	OCD Permit Number:
21. Closure Report (required within 60 days of closure completion): Subsection Instructions: Operators are required to obtain an approved closure plan prior to The closure report is required to be submitted to the division within 60 days of the section of the form until an approved closure plan has been obtained and the closure plan plan has been obtained and the cl	o implementing any closure activities and submitting the closure report. he completion of the closure activities. Please do not complete this
22.  Closure Method:  ☐ Waste Excavation and Removal ☐ On-Site Closure Method ☐ Alterna ☐ If different from approved plan, please explain.	ative Closure Method
Closure Report Regarding Waste Removal Closure For Closed-loop Systems Instructions: Please indentify the facility or facilities for where the liquids, drill two facilities were utilized.  Disposal Facility Name:  Disposal Facility Name:  Were the closed-loop system operations and associated activities performed on or  Yes (If yes, please demonstrate compliance to the items below) No  Required for impacted areas which will not be used for future service and operation  Site Reclamation (Photo Documentation)  Soil Backfilling and Cover Installation  Re-vegetation Application Rates and Seeding Technique	Disposal Facility Permit Number:  Disposal Facility Permit Number:  in areas that will not be used for future service and operations?
Closure Report Attachment Checklist: Instructions: Each of the following ite mark in the box, that the documents are attached.  Proof of Closure Notice (surface owner and division)  Proof of Deed Notice (required for on-site closure)  Plot Plan (for on-site closures and temporary pits)  Confirmation Sampling Analytical Results (if applicable)  Waste Material Sampling Analytical Results (required for on-site closure)  Disposal Facility Name and Permit Number  Soil Backfilling and Cover Installation  Re-vegetation Application Rates and Seeding Technique  Site Reclamation (Photo Documentation)  On-site Closure Location: Latitude Longity	ems must be attached to the closure report. Please indicate, by a check  ude NAD: ☐1927 ☐ 1983
25. Operator Closure Certification:	
I hereby certify that the information and attachments submitted with this closure rebelief. I also certify that the closure complies with all applicable closure requirements.	
Name (Print):	Title:
Signature:	Date:

C-144 Page 5 of 16 Rosa #378

Telephone: \_

e-mail address:

District I PO Box 1980, Hobbs, NM 88241-1980

District II PO Drawer DD, Artesia, NM 88211-0719

District III 1000 Rio Brazos Rd. Aztec, NM 87410

District IV PO Box 2088, Santa Fe, NM 87504-2088 State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION PO Box 2088 Santa Fe. NM 87504-2088

Form C-102
Revised February 21, 1994
Instructions on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies


\_\_\_\_ AMENDED REPORT


#### WELL LOCATION AND ACREAGE DEDICATION PLAT

'API Numbe	r 'Pool Code 71629	Pool Name BASIN FRUITLAND CO	AL
Property Code 17033		°Property Name ROSA UNIT	
'OGRID No 120782	·	*Operator Name *Elevation WILLIAMS PRODUCTION COMPANY 5511'	

<sup>10</sup> Surface Location UL or lot ro. Feet from the North/South line Sect 10 Township Lot Idn Feet from the East/West line RIO G 27 31N 5W 2060 NORTH 1945 EAST ARRIBA <sup>11</sup>Bottom Hole Location If Different From Surface it or lot no. Sect ion Township Lot Idn North/South line Feat from the RIO 27 31N 5W 1650 NORTH Н 990 EAST ARRIBA 12 Dedicated Acres side or Infill Consolidation Code Order No. 320.0 Acres - (E/2)

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

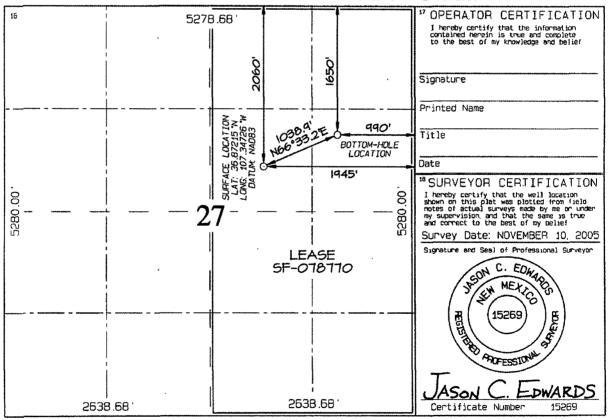

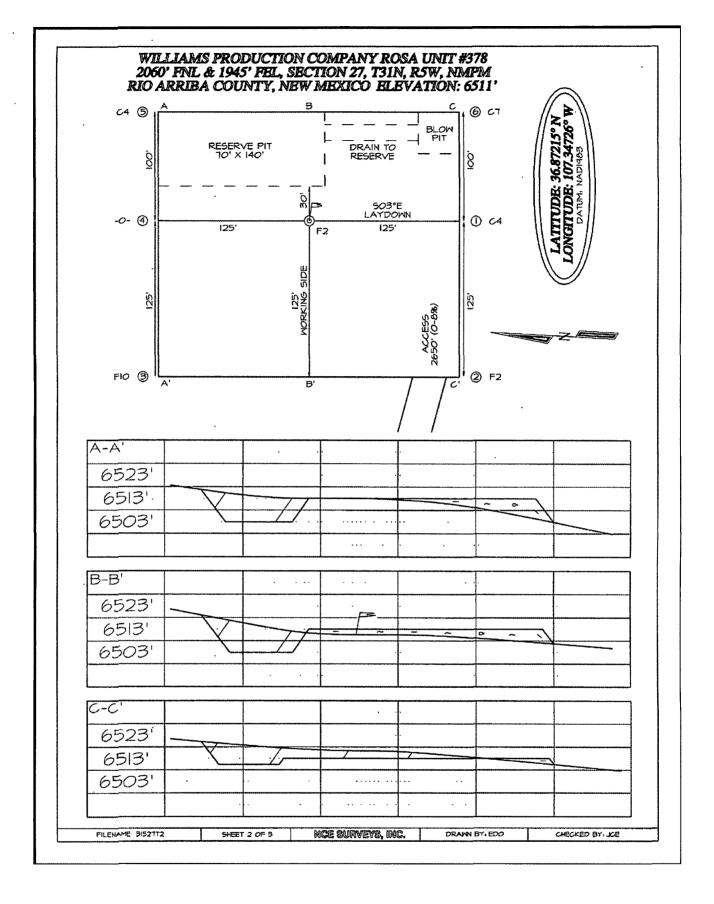

## Hydrogeological Report Williams Production Company, LLC Rosa #378 Regional Hydrological Context

#### **Referenced Well Location:**

The referenced well and pit is located in Carson National Forest's Jicarilla Ranger District in Rio Arriba County, New Mexico. This site is positioned in the northeastern portion of the San Juan Basin, an asymetrical syncline that extends from northwestern New Mexico into southwestern Colorado (Carson National Forest DEIS, 2007). Elevation of the referenced well is approximately 6511 feet MSL.

#### **General Regional Groundwater Description:**

As a portion of the San Juan Basin, the Jicarilla Ranger District is underlain by sandstone aquifers of the Colorado Plateau. The primary aquifer of potential concern at this location is the Unita-Animas Aquifer, composed primarily of Lower Tertiary rocks in the San Juan Basin. The aquifer consists of the San Jose Formation; the underlying Animas formation and its lateral equivalent, the Nacimiento formation; and the Ojo Alamo Sandstone. The thickness of the Unita-Animas aquifer generally increases toward the central part of the basin. In the northeastern part of the San Juan Basin, the maximum thickness of the aquifer is approximately 3500 feet (USGS, 2001). This aquifer contains fresh to moderately saline water.

Groundwater generally flows toward the San Juan River and it tributaries, where it becomes alluvial groundwater or is discharged to stream flow. Additional information regarding the Hydrogeologic setting can be found in the provided references.

**Site Specific Information:** 

Surface Hydrology: The pit is located in mid elevations on a northwestern slope of Laguna

Seca Mesa, draining towards a wash associated with Cabresto Canyon.

There are no drainages within 300 feet of the pit.

1st Water Bearing Formation:

Formation Thickness: Underlying Formation: Depth to Groundwater: San Jose, Tertiary Approximately 1,900 ft. Nacimiento, Tertiary

Depth to groundwater is estimated at greater than 100 feet bgs. There are

no iWATERS wells with water depth data located within one mile of this

location. However, cathodic data associated with Rosas #343

(approximately 2100 feet from the pit) and 345 (approximately 3700 feet from the pit) shows a depth to moisture of 260 feet (see Siting Criteria

Map I for details).

#### **References:**

Allen, Erin. Undated. Colorado Plateau Aquifers.

http://academic.emporia.edu/schulmem/hydro/TERM%20PROJECTS/2007/Allen/Aquifer.html.

New Mexico Energy, Minerals and Natural Resources Department, Division of Mining and Minerals. Database. 2008. Internet accessed August 2008.

New Mexico Office of the State Engineer. August 2008, iWaters database. Internet accessed August 2008.

New Mexico WQCC. 2005. State of New Mexico Water Quality Act and the Water Control Commission Regulations.

United States Department of Agriculture, Forest Service. 2007. Draft Environmental Impact Statement for Surface Management of Gas Leasing and Development. Jicarilla Ranger District, Carson National Forest, Rio Arriba County, New Mexico.

United States Department of the Interior. Bureau of Land Management. 2003. Final Farmington Resource Management Plan and Final Environmental Impact Statement. Farmington Field Office, Farmington, New Mexico.

United States Geological Survey. 2001. Groundwater Atlas of the United States: Arizona, Colorado, New Mexico and Utah. USGS Publication HA 730-C; <a href="http://capp.water.usgs.gov">http://capp.water.usgs.gov</a>.


New Mexico Office of the State Engineer POD Reports and Downloads

Page 8 of 16 Rosa #378


Township: 31N Range: 05W Sections:	
NAD27 X: Y: Zone: Search Radius:	
County: Basin: Number: Suffix:	
Owner Name: (First) (Last) C Non-Domestic Domestic	
POD / Surface Data ReportAvg Depth to Water ReportWater Column Report	
WATER COLUMN REPORT 08/26/2008	
(quarters are 1=NW 2=NE 3=SW 4=SE) (quarters are biggest to smallest) Depth Depth Water in feet)	
OD Number Tws Rng Sec q q Q Zone X Y Well Water Column	

No Records found, try again

# Siting Criteria Map I Water Wells, Cathodic Wells, & Springs Williams Exploration and Production Company Rosa #378 T31N, R5W, Section 27, NMPM Rio Arriba County, New Mexico

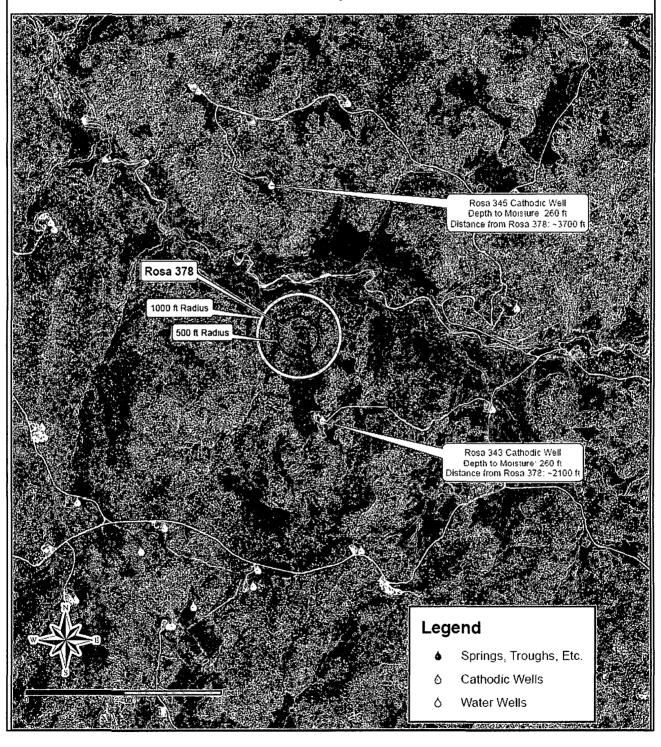

# Siting Criteria Map II Topographic Features Williams Exploration and Production Company Rosa #378 T31N, R5W, Section 27, NMPM Rio Arriba County, New Mexico

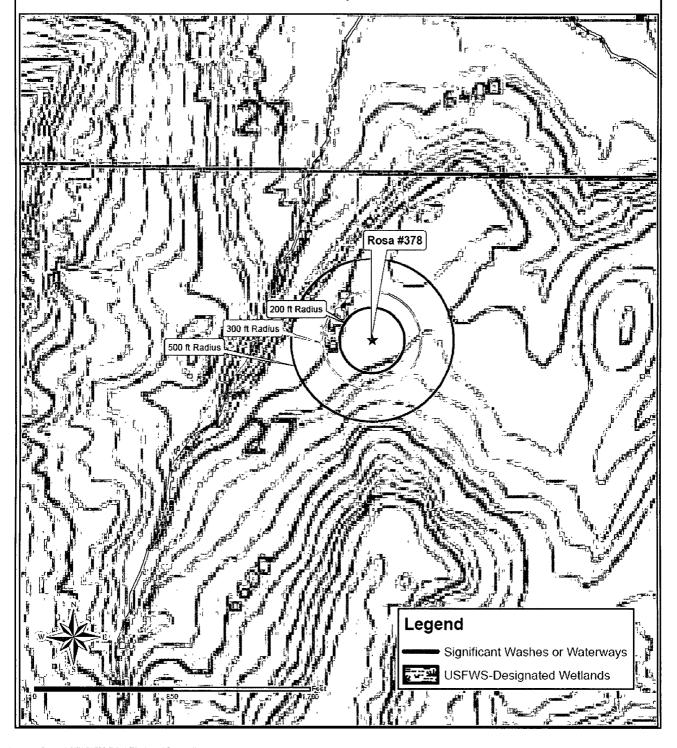


#### FEMA Map – 100-Year Floodplain:

As this location is within Carson National Forest, no FEMA maps are available. However, ortho and topographic maps indicate that this location is not within a floodplain.

#### **Siting Criteria Compliance Demonstrations:**

The Rosa #378 pit is not located in an unstable area. The pit is not situated over a mine or a steep slope (see attached New Mexico Mines, Mills, and Quarries Map). Excavated pit material will not be located within 300 feet of a continuously flowing water course; within 200 feet of another significant watercourse, lakebed, sinkhole, or playa lake; or within 500 feet of any reported riparian areas or wetlands (see Siting Criteria Map II). The pit is not within 500 feet of any private, domestic fresh water well or spring or within 1000feet of any other fresh water well or spring (see Siting Criteria Map I). The pit will not be within any incorporated municipal boundaries or defined municipal freshwater well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. The location of the pit is not within 300 feet of any permanent residence, school, hospital, institution, or church. FEMA 100-Year Floodplain Map: Township 31 North, Range 6 West, Section 11, Unit M.

### **MMQonline Public Version**

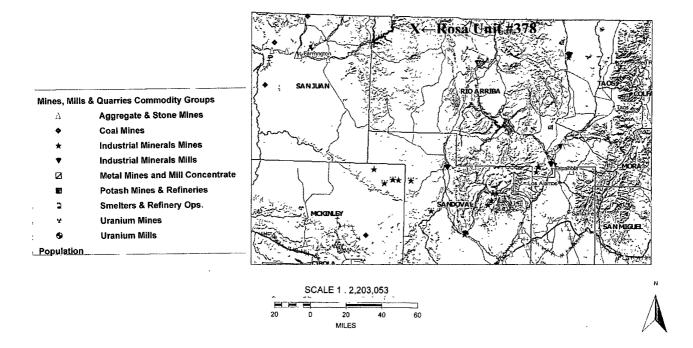

#### Williams Production Co., LLC San Juan Basin: New Mexico Assets

Temporary Pit Maintenance & Operating Plan Drilling/Completion and Workover

In accordance with Rule 19.15.17 NMAC, the following plan describes the general operations and maintenance (O&M)of temporary pits on Williams Production Co, LLC (WPX) locations in the San Juan Basin of New Mexico. This is WPX's standard procedure for all temporary pits to be utilized for the drilling, completion and/or workover of oil and gas wells operated by WPX. For those temporary pits which do not conform to this standard O&M plan, a separate well specific O&M plan will be developed and utilized.

#### General Plan Requirements:

- 1. WPX will operate and maintain a temporary pit to contain liquids and solids associated with drilling, completion and workover of oil and gas wells which will prevent contamination of fresh water resources and protect public health and the environment.
- 2. WPX will to the extent practical conserve drilling fluids for reuse by transferring liquids to pits ahead of the rigs. All other fluids will be disposed by evaporation or transport to Basin Disposal, Inc in Bloomfield, New Mexico (Permit # NM-01-005).
- 3. WPX shall maintain at least two (2) feet of vertical freeboard for a temporary pit.
- 4. WPX shall remove all free liquids from a temporary pit within 30 days from the date the drilling or workover rig is released.
- 5. Only fluids and solids generated during the drilling/completion/workover process may be discharged into a temporary pit. Other miscellaneous soild waste or debris will not be allowed.
- 6. WPX will not discharge or store any hazardous waste as defined under RCRA 40CFR 261 and 19.15.1.7.W(3) NMA in any temporary pit.
- 7. If any pit liner's integrity is compromised, or if any penetration of the liner occurs:
  - a. Above the liquid's surface, WPX shall repair the damage or replace the liner as necessary. WPX will notify the NMOCD Aztec District Office by phone or email within 48-hours of discovery.
  - b. Leak below the liquid's surface, WPX shall suspend operations, remove all liquids above the damaged liner within 48 hours, and repair the damage or replace the liner. WPX will notify and report to NMOCD as follows:
    - i. If the release is less than 25 bbls, the Aztec District Office by phone or email within 48-hours of discovery and repair.
    - ii. If the release is suspected to be greater than 25 bbls, the Aztec District Office and the Environmental Bureau Chief by phone for immediate verbal notification pursuant to 19.15.3.116.B (1)(d).
  - c. Written Spill/Release reports will be submitted on Form C-141 per 19.15.3.116.C NMAC within 15 days to the Aztec District Office.
- 8. The liner shall be protected from any fluid force or mechanical damage through the use of mud pit slides (secondary liner placed over the primary liner), and/or a manifold system.
- 9. Diversion ditches, around the location or around the perimeter of the pit, shall be maintained as protection from run-on.
- 10. WPX shall immediately remove any visible layer of oil from the surface of a temporary pit following cessation of drilling/completion/workover operations. Oil absorbent booms will be utilized to contain and remove oil. An oil absorbent boom will stored on-site until the pit is covered.
- 11. WPX will inspect the temporary pits as follows to ensure compliance with this plan:
  - Daily during drilling or workover operations. Inspections will be included with the IADC reports.
  - b. Weekly as long as liquids remain in the pit. Electronic copies of the inspections will be kept at the WPX San Juan Basin office.
  - c. Copies of the inspections will be filed with the NMOCD Aztec District office upon pit closure.
- 12. WPX shall remove all free liquids from a blow/flare (cavitation) pit within 48 hours after completing operations. WPX may request additional time to remove liquids from the Aztec District office if it is not feasible to meet the 48 hour requirement.

#### Williams Production Co., LLC San Juan Basin: New Mexico Assets

Temporary Pit In-place Closure Plan Drilling/Completion and Workover (Groundwater > 100 feet bgs)

In accordance with Rule 19.15.17.13 NMAC, the following plan describes the general in-place closure requirements of temporary pits on Williams Production Co, LLC (WPX) locations in the San Juan Basin of New Mexico. This is WPX's standard procedure for all temporary pits to be utilized for the drilling, completion and/or workovers of oil and gas wells operated by WPX. For those temporary pits which do not conform to this standard closure plan, a separate well/pit-specific closure plan will be developed and utilized.

All closure activities will include proper documentation and will be submitted to OCD within 60 days of the pit closure on a Closure Report using Division Form C-144. The Report will include the following:

- Details on Capping and Covering, where applicable
- Plot Plan (Pit Diagram)
- Inspection reports
- Sampling Results
- Division Form C-105: WELL COMPLETION OR RECOMPLETION REPORT AND LOG
- Copy of Deed Notice filed with the County Clerk (formatted to meet County requirements)

#### General Plan Requirements:

- 1. All free-standing liquids will be removed from the pit at the start of the closure process. Liquids will be removed in a manner that the appropriate District Office approves including: recycled, reused, reclaimed, evaporated, and/or disposed of in a Division-approved facility. Once all free liquids are removed, the sludge will be stabilized by one of the following methods depending on equipment availability: blending with clean stockpiled soils or dewatering using a Bowl Decanter Centrifuge, then blending with clean stockpiles soils.
- 2. The preferred method of closure for all temporary pits will be on-site closure by in-place burial, provided all the criteria in 19.15.17.13.B are met.
- 3. The surface owner shall be notified of WPX's proposed closure plan using a means that provides proof of notice (i.e. certified mail/return receipt requested).
- 4. Within six months of the "rig-off" status occurring, WPX will ensure that the temporary pit is covered and recontoured, and that reseeding is in progress.
- 5. Notice of Closure will be given to the Aztec District office between 72 hours and one week of the scheduled closure via email or phone. The notification of closure will include the following:
  - a. Operator's Name (WPX)
  - b. Well Name and API Number
  - c. Location (USTR)
- 6. The pit liner shall be removed above "mud level" after stabilization. Removal of the liner will consist of manually or mechanically cutting the liner at the mud level and removing all remaining liner. Care will be taken to remove "all" of the liner (i.e. anchored material). All excessive liner will be disposed of at a licensed disposal facility (probably San Juan Regional Landfill, operated by Waste Management under NMED Permit SWM-052426).

- 7. Solidification of the remaining pit contents shall be achieved by mixing non-waste-containing, earthen material. The solidification process will be accomplished using a combination of natural drying and mechanical mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed safe and stable. The mixing ratio shall not exceed 3 parts non-waste to 1 part pit contents.
- 8. A five-point composite sample will be taken of the pit using sampling tools; all samples will be tested per 19.15.17.13(B)(1)(b) NMAC. In the event that the criteria are not met (See Table 1), all contents will be handled per 19.15.17.13(B)(1)(a) (i.e. dig and haul to a Division-approved facility). Approval to haul will be requested of the Aztec District office prior to initiation.

Table 1: Closure Criteria for Temporary Pits in Non-sensitive Areas

Components	Testing Methods	Closure Limits (mg/Kg)	
Benzene	EPA SW-846 Method 8021B or 8260B	0.2	
BTEX	EPA SW-846 Method 8021B or 8260B	50	
TPH	EPA SW-846 Method 8015 M(Full Range)*	2500	
	or Method 418.1		
GRO/DRO	EPA SW-846 Method 8015M (GRO/DRO)	500	
Chlorides	EPA SW-846 Method 300.1	1000	

<sup>\*</sup> Preferred method

- 9. Upon completion of solidification and testing, the pit area will be backfilled with non-waste, earthen material compacted to native conditions to enable effective revegetation for successful evapotranspiration. A minimum of four feet of cover will be used, including replacement of one foot of suitable material to establish vegetation, or the background thickness of topsoil, whichever is greater.
- 10. Following cover, the site will be recontoured to meet the Surface Management Agency or surface owner requirements. Re-contouring will attempt to match fit, shape, line form, and texture of the surrounding geography. Re-shaping will provide drainage control, prevent ponding, and minimize erosion. Natural drainages will be unimpeded and stormwater Best Management Practices (BMPs) will be used to aid in soil stabilization and protect surface water quality.
- 11. Notification will be sent to the Aztec District office when the reclaimed area is seeded.
- 12. WPX shall seed the disturbed areas the first growing season after the pit is covered. Seeding will be accomplished via drilling on the contour whenever practical, or by other Division-approved methods. Vegetative cover will equal 70% of the native perennial vegetative cover (unimpacted), consisting of at least three native plant species, including at least one grass, but not including noxious weeds. Cover will be maintained through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs. Note: WPX assumes the seeding stipulations, including mix and seeding methods, specified by the Surface Management Agency (BLM, BOR, USFS, Tribal, etc.) or Landowner as part of a surface use agreement or APD are Division-approved methods unless notified by the Division of their unacceptability.
- 13. Upon the abandonment of all wells on the pad, the temporary pit will be located with a steel marker no less than four inches in diameter, cemented in a hole three feet deep in the center of the on site burial. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the on site burial of the temporary pit. The plate will be easily removable and a four-foot tall riser will be threaded into the top of the collar marker and welded around the base with the operations information at the time of all wells on the pad abandoned. The information will include Operator Name, Lease Name, Well Name and number, USTR, and an indicator that the marker is an onsite pit burial location.

#### Lane, Myke (E&P)

From: Lane, Myke (E&P)

Sent: Tuesday, September 30, 2008 7:43 AM

To: John Reidinger

Cc: Brandon.powell@state.nm.us

Subject: Land Owner Notice - Rosa 378 Reserve Pit Clsoure

#### John;

This correspondence is to notify the USFS-Carson Forest: Jicarilla District that Williams Production is planning to close the temporary pit associated with the drilling and completion of the reference wells on-site. The planned closure is consistent with the Surface Use Plan submitted with Williams APD, approved earlier.

This notice is to comply with the NMOCD Pit Rule 19.15.17 NMAC requirement to notify surface owners of the operator's intended closure method. If site conditions do not allow Williams to close in-place, we will provide your office with prior notice should the BLM have any concerns.

Please contact us if there are any questions or additional information is required.

Michael K. (Myke) Lane, PE EH&S Team Leader - San Juan Basin Operations 721 S. Main/PO Box 640, Aztec, NM 87410 (505) 634-4219(off); -4205(fax); 330-3198(cell)

"The problems we face cannot be resolved at the same level of thinking as that which gave rise to them!"---shared with me by Brent Hale