1625 N French Dr., Hobbs, NM 88240

District II

1301 W Grand Ave , Artesia, NM 88210

District III 1000 Rio Brazos Rd, Aztec, NM 87410

1220 S St Francis Dr, Santa Fe, NM 87505

State of New Mexico **Energy Minerals and Natural Resources**

Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

July 21, 2008 For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office

Form C-144

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office

1852

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

Type of action:	Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method
	Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method
	Modification to an existing permit
	X Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop systems below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of hability should operations result in pollution of surface water, ground water or the environment. Not does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances

Occupante Puralinator Personnes Oil & Cos Company I P
Operator: Burlington Resources Oil & Gas Company LP OGRID#: 14538 Address: PO Box 4289, Farmington, NM 87499
Facility or well name: San Juan 29-7 Unit No. 030N
API Number: 30-039-30428 OCD Permit Number
U/L or Qtr/Qtr: N(SE/SW) Section: 35 Township: 29N Range: 7W County: Rio Arriba
Center of Proposed Design: Latitude: 36.406369°N Longitude: 107326250°W NAD: X 1927 1983
Surface Owner: X Federal State Trivate Tribal Trust or Indian Allotment
2
Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Lined Unlined Liner type: Thickness mil LLDPE HDPE PVD Other RECEIVED
Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume:
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

6'		
Fencing: Subsection D of 19 15 17.11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks)		
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, inst	itution or chur	ch)
Four foot height, four strands of barbed wire evenly spaced between one and four feet		
X Alternate. Please specify 4' hogwire fence with a single strand of barbed wire on top.		
7		
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)		
Screen Netting Other		
Monthly inspections (If netting or screening is not physically feasible)		
8		
Signs: Subsection C of 19.15 17.11 NMAC		
12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers		
X Signed in compliance with 19 15.3.103 NMAC		
9		
Administrative Approvals and Exceptions:		
Justifications and/or demonstrations of equivalency are required Please refer to 19 15.17 NMAC for guidance.		
Please check a box if one or more of the following is requested, if not leave blank:		
Administrative approval(s) Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for constant	ideration of ap	proval.
Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.		
Siting Criteria (regarding permitting): 19.15.17.10 NMAC		
Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable	1	
source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the		
appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria		
does not apply to drying pads or above grade-tanks associated with a closed-loop system.		
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes	X No
	l _—	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa	Yes	X No
lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site		
	l	
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial	Yes	X No
application.		
(Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	□□NA	
	l	I
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	∐No
(Applied to permanent pits)	XNA	
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image		
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering	Yes	XNo
purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.		
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site.		
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance		XNo
adopted pursuant to NMSA 1978, Section 3-27-3, as amended	Yes	AINO
- Written confirmation or verification from the municipality; Written approval obtained from the municipality		
Within 500 feet of a wetland.	Yes	X No
- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site		
Within the area overlying a subsurface mine.	Yes	X No
- Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division		
Within an unstable area.	Yes	X No
- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map		
Within a 100-year floodplain	Yes	X No
- FEMA map	🗀 '`	٠٠٠٠ ا

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.										
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC										
X Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9										
X Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC										
X Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC										
X Operating and Maintenance Plan - based upon the appropriate requirements of 19 15.17 12 NMAC										
X Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of										
19.15 17.9 NMAC and 19.15.17.13 NMAC										
Previously Approved Design (attach copy of design) API or Permit										
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19 15.17 9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17 9										
Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15 17.10 NMAC										
Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC										
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC										
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17 9 NMAC and 19 15.17 13 NMAC										
Previously Approved Design (attach copy of design) API										
Previously Approved Operating and Maintenance Plan API										
13										
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC										
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.										
Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15.17.9 NMAC										
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15.17.10 NMAC										
Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC										
Dike Protection and Structural Integrity Design based upon the appropriate requirements of 19.15.17.11 NMAC										
Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC										
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC										
Quality Control/Quality Assurance Construction and Installation Plan										
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15 17.12 NMAC										
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC										
Nuisance or Hazardous Odors, including H2S, Prevention Plan										
Emergency Response Plan										
Oil Field Waste Stream Characterization Monitoring and Inspection Plan										
Erosion Control Plan										
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC										
14										
Proposed Closure: 19.15.17.13 NMAC										
Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.										
Type. X Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative										
Proposed Closure Method.										
Waste Removal (Closed-loop systems only)										
X On-site Closure Method (only for temporary pits and closed-loop systems)										
XIn-place Burial On-site Trench										
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)										
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan.										
Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19 15.17 13 NMAC										
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC										
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)										
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC										
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17 13 NMAC										
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC										

Form C-144 Oil Conservation Division Page 3 of 5

16									
Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.D NMAC) Instructions: Please identify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more than two facilities for the disposal of liquids, drilling fluids and drill cuttings.	acilities								
Disposal Facility Name Disposal Facility Permit #									
Disposal Facility Name Disposal Facility Permit #									
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future so Yes (If yes, please provide the information No									
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specification - based upon the appropriate requirements of Subsection H of 19 15 17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19 15 17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15 17.13 NMAC									
17									
Siting Criteria (Regarding on-site closure methods only: 19.15 17.10 NMAC Instructions, Each stung criteria requires a demonstration of compliance in the closure plan Recommendations of acceptable source material are provided belo certain siting criteria may require administrative approval from the appropriate district office or may be considered in exception which must be submitted to the for consideration of approval—Justifications and/or demonstrations of equivalency are required—Please refer to 19 15.17 10 NMAC for guidance.									
Ground water is less than 50 feet below the bottom of the buried waste - NM Office of the State Engineer - 1WATERS database search; USGS. Data obtained from nearby wells	Yes X No								
Ground water is between 50 and 100 feet below the bottom of the buried waste	Yes X No								
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	N/A								
Ground water is more than 100 feet below the bottom of the buried waste.	X Yes No								
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	N/A								
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).	Yes XNo								
- Topographic map; Visual inspection (certification) of the proposed site	Dyos VNo								
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; satellite image	Yes X No								
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the time of the initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	resno								
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality, Written approval obtained from the municipality	Yes X No								
Within 500 feet of a wetland - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes XNo								
Within the area overlying a subsurface mine.	Yes XNo								
 Written confirantion or verification or map from the NM EMNRD-Mining and Mineral Division Within an unstable area. 	Yes XNo								
- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	L I es A NO								
Within a 100-year floodplam FEMA map	Yes X No								
On-Site Closure Plan Checklist: (19 15 17.13 NMAC) Instructions: Each of the following items must bee attached to the closur by a check mark in the box, that the documents are attached.	re plan. Please indicate,								
X Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15 17.10 NMAC									
X Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC									
Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC									
Construction/Design Plan of Temporary Pit (for in place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.11 NMAC									
X Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15 17 13 NMAC									
X Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19 15.17.13 NMAC									
X Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards ca	nnot be achieved)								
Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC									
 Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17 13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC 									
one recommend rian - based upon the appropriate requirements of Subsection C of 19.13.17.13 INMAC									

19			<i>'</i>
Operator Application	•		
	nformation submitted with this application		
Name (Print):	Ethel Tally	Title:	Staff Regulatory Technician
Signature:	Ethel Sall	Date	10-3-08
e-mail address	Ethel Tally@ConocoPhillips.c	com Telephone:	505-599-4027
			The state of the s
20			
OCD Approval:	Permit Application (including closure		' ' '
OCD Representative	Signature: Brunds	n Pell	Approval Date:
_	vio /spec		
Fitle:Ep	VIO 15pec	OCD Pe	rmit Number:
21			
	ired within 60 days of closure comp	nletion): Subsection K at 19 15 17 13 NM	IAC
nstructions. Operators a	re required to obtain an approved closur	re plan prior to implementing any cl	osure activities and submitting the closure report. The closure
			ties. Please do not complete this section of the form until an
рргочей стоянте риан на	is been obtained and the closure activitie		C. Le D.
	· · · · · · · · · · · · · · · · · · ·	Clost	re Completion Date:
22			
Closure Method:			
Waste Excavation	n and Removal On-site Closu	nre Method Alternative Closu	re Method
If different from a	approved plan, please explain.		
3			
Closure Report Regardi	ng Waste Removal Closure For Closed	I-loop Systems That Utilize Above	Ground Steel Tanks or Haul-off Bins Only:
	tify the facility or facilities for where th	e liquids, drilling fluids and drill cu	ttings were disposed. Use attachment if more than two facilities
rere utilized. Disposal Facility Nam	ne'	Disposal Facil	ity Permit Number.
Disposal Facility Nam			ity Permit Number:
-			not be used for future service and opeartions?
	e demonstrate complilane to the items be	-	
	d areas which will not be used for future :	—	
	(Photo Documentation)		
Soil Backfilling a	and Cover Installation		
Re-vegetation Ap	pplication Rates and Seeding Technique		
24			
Closure Report At		ich of the following items must be a	ttached to the closure report. Please indicate, by a check mark in
the box, that the docu			
=	e Notice (surface owner and division)		
=	Notice (required for on-site closure)		
=	n-site closures and temporary pits)		
=	ampling Analytical Results (if applica		
==	Sampling Analytical Results (if applied	cable)	
	y Name and Permit Number		
= '	and Cover Installation		
=	pplication Rates and Seeding Technic	que	
_	n (Photo Documentation)	_	🗖 👨
On-site Closure	Location: Latitude	Longitude [,]	NAD
			· · · · · · · · · · · · · · · · · · ·
25			
Operator Closure Cer			
	nformation and attachments submitted wi all applicable closure requirements and	-	tte and complete to the best of my knowledge and belief. I also certify that delasure plan
ac crosure compues with	un appucavie ciosure requirements and	соланють specifiea in the approved	л стояте рин.
Name (Print):		Title:	
Signature:		Data	
		Date:	700 S. C.
e-mail address		Telephone.	

New Mexico Office of the State Engineer POD Reports and Downloads


~~~~		_						
Townshi	ip: 29N	Range: 07W	Sections: 25	,26,27,34	,35,36			
NAD27 X	•	Y:	Zone:		Search Ra	dius:	]	
County:		Basin:			Number:	, , , , , , , , , , , , , , , , , , ,	Suffix	·•
		ļ !						
Owner Name: (Fir	st)	(La	ast)		○Non-Do	mestic	O Dome	estic
			All					
No a trace of	POD / Su	face Data Report	er Column Repo	- 300 W. OP C - W. COMB V. C. S.	o Water Re	port		
	(	Clear Form	iWATERS M	enu	Help			
o taute mer stockale en enter e venerous skokes a never sonswell en far men en en	and the second s		ATER COLUMN F		L0/02/200	8		The transfer of the second
	quarter	s are 1=NW 2: s are biggest Rng Sec q q	to smallest	:)		Depth Well	Depth Water	Wat∈ Colum

No Records found, try again

# New Mexico Office of the State Engineer POD Reports and Downloads

Township: 28N Range: 07W Sections: 1,2,3
NAD27 X: Zone: Search Radius:
County: Basin: Number: Suffix:
Owner Name: (First) (Last) Onn-Domestic Onestic
POD / Surface Data Report  Water Column Report  Clear Form  iWATERS Menu  Help
Les describes à la Sale de les seus des fins des describes de les describes de la Company de la Comp
WATER COLUMN REPORT 10/02/2008
(quarters are 1=NW 2=NE 3=SW 4=SE) (quarters are biggest to smallest)  POD Number  Tws Rng Sec g g g Zone X Y Well Water Column

No Records found, try again

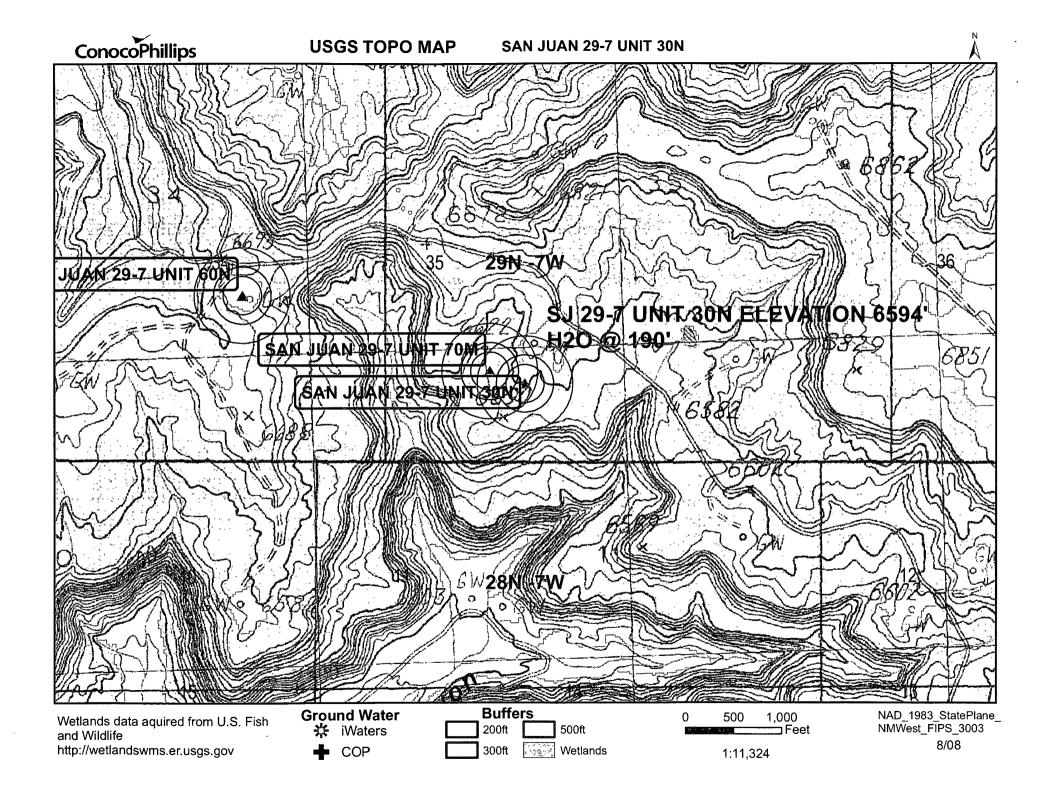

637

30 - 30039-00541 30E- 30-039-23629 531- 30-039-24798

DATA SHEET FOR DEEP GROUND BED CATHODIC. PROTECTION WELLS 03/4/6/
NORTHWESTERN NEW MEXICO

Operator Meridian Oil Location: Unit H Sec. 35 Twp 29 Rng 7
Name of Well/Wells or Pipeline Serviced San Juan 29-7 #30 + 30Ev #53/
Elevation 685 Completion Date 9-5-91 Total Depth 370 Land Type
Casing Strings, Sizes, Types & Depths 100 6 8 PUC
If Casing Strings are cemented, show amounts & types used 195-23 sacks
If Cement or Bentonite Plugs have been placed, show depths & amounts used $None$
Depths & thickness of water zones with description of water: Fresh, Clear, Salty, Sulphur, Etc. 190' - Fresh
Depths gas encountered: None
Ground bed depth with type & amount of coke breeze used: 376  Ashuru Coke-182 Bags
Ashury (oke- $187$ Bags  #1-355 #2-345 #3-335 #4-325, #5-315 #6-305  Depths anodes placed: #7-295 #8-285, #9-245 #10-235 #11-225 #12-200
Depths vent pipes placed: Surface to 370
Vent pipe perforations: From 100 to 370 DECEMBER
Remarks:
FEB2 41992

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee. If Federal or Indian, add Lease Number.

### CPS GROUND BED CONSTRUCTION WORKSHEET


CPS GROUND BED CONSTRUCTION WORKSHEET													
3/4-0 PIL NAME (*), NUMBER (*) San Juan 29-7 * 531, #30, #30E  WO # J629 TOTAL VOLTE /2,2 AMPS 24.5 - CHMS 49 9-5-9/ D. Ashworth													
	120	TOTAL.	VOLTE	1	AMP8	(	HME U	9 DAT	rez	NAME	1 +1		
· · · · · · · · · · · · · · · · · · ·													
HEMHA	REMARKS (notes for construction log)												
	PerF-270												
1/2 1/2													
H20-190													
DEPTH	LOG	ANGDE	DEPTH	L.Q.0	ANODE	DEPTH	LOG	ANODE	DEPTH	LOG	ANODE		
JEP (11)	ANODE	1 1		ANODE	<b>44</b> =4		ANODE	<b>*</b>		ANCOR	##-#51:		
100		1	295	2.3	7	490			685				
105			300	2.0		495			690				
110			305	Z.1	6	500			695				
115			310	$Z_{i}I$		505			700				
120		.	315	1.8	5	510			ANODE	DEPTH	NO	PULL	
125		-	320	2,3		515				<b></b>	CONE	COK.	
730			325	Z,/_	4	520				355	22	5,4	
135	4 4-01	-	330	2,2		525			2	345	2,6	6.0	
140	* # 24	-}	335	Z, 2	3	530	ļi		_3	33.5	Z,Z Z,3' Z,0	<u>5.3</u>	
145		-	340	20	Z	<u>535</u> 540			5	325	43	2.3	
150 155	}		<u>345</u> 350	2,7		545			6	3/5	=0	5.4 5.5	
160	7.9	-	355	2.1	7	550			7	Z95	Z./ Z,3	22	
165	12	-	360	2,3		555		· ·	8	Z85	2.5	3,5	
170	1,6	-	365	1,9		560			9	245	Z.8 3,3 Z.0	7.7	
175	41		370	TD-370		565		:	10	235	3/3	7.5	
180	2.4		375			570		P	11	225	Z.0	6,2	
185	3,5		380			575		ţ.	12	200	3.0	6.6	
190	3,3	_	385			580		<u> </u>	_13	ļ	ļ		
195	3.1		390			585		<u> </u>	14			<b> </b>	
200	28	12	395			590		<b></b>	15	l ———		·	
205	2.0 7.9	-	400		]	595		<del></del>	16				
210 215	22	~	405			600 605			17		<del> </del>		
220	2.1	-	415			610		<del></del>	19	·		1	
225	1.3	- 11	420			615			20			1	
230	2,4		425			620			21				
235	3.6 3.0	10	430			625			22		.	.	
240	3,0	-{	435			630			23	·	.	-	
245	2,9-	9	440			635			24		.		
250	2,2	-	445	<b> </b>		640			25	·	.	· <del> </del>	
255	1.3		450			645			26	·}	-	-}	
260	-,9 -,8	-	455			650	<b> </b>	<b> </b>	27		-	-	
265	8	-	460 465			655 660	<b> </b>		28	·	-	· (64.)	
270 275	92	-	470			665			29 30	·	-	-	
80	1.8		475			670		1	1	-		1	
<u>∠85</u>	2,5	8	480			675	1					* <b>*</b>	
290	2,3		485	}		680				1	- S	建设	
	1 - / -	1	l)	1	1	}}	1	1	11	1	1 "	<b>"快吃</b> "。	

DISTRIBUTION - original - permanent CPS FILE


copy -- Division Correcton Supervisor


py -- Region Correction Specialist




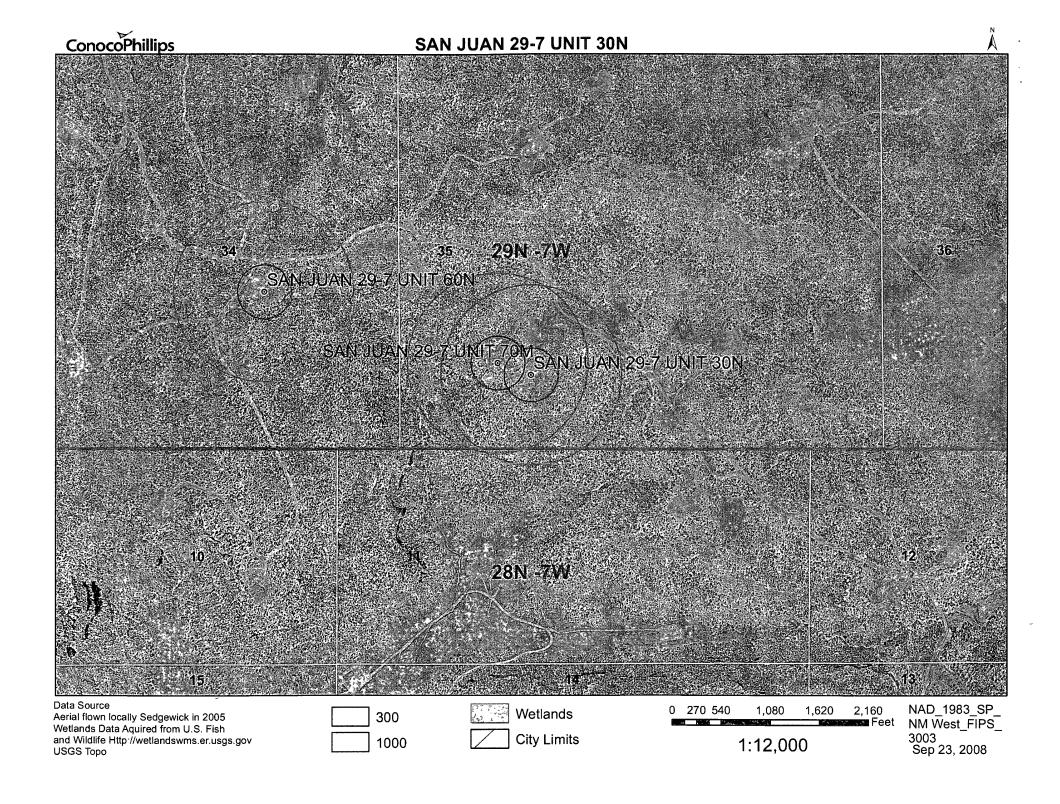


# SJ 29-7 UNIT 30N/MINES, MILLS AND QUARRIES MAP

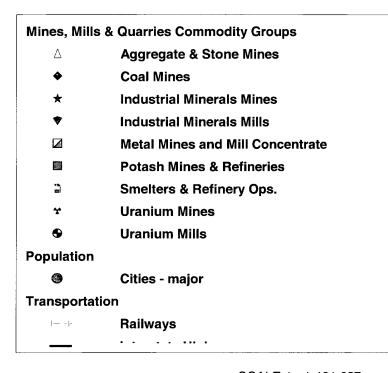

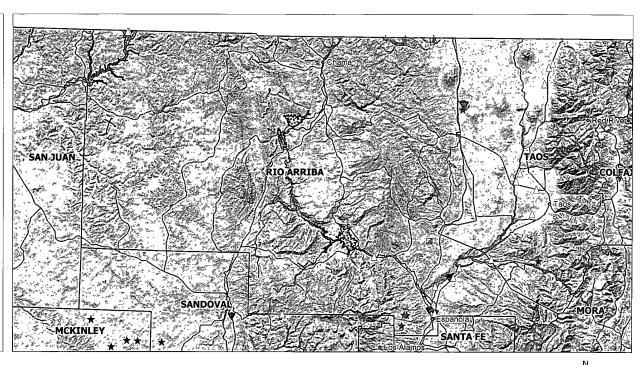





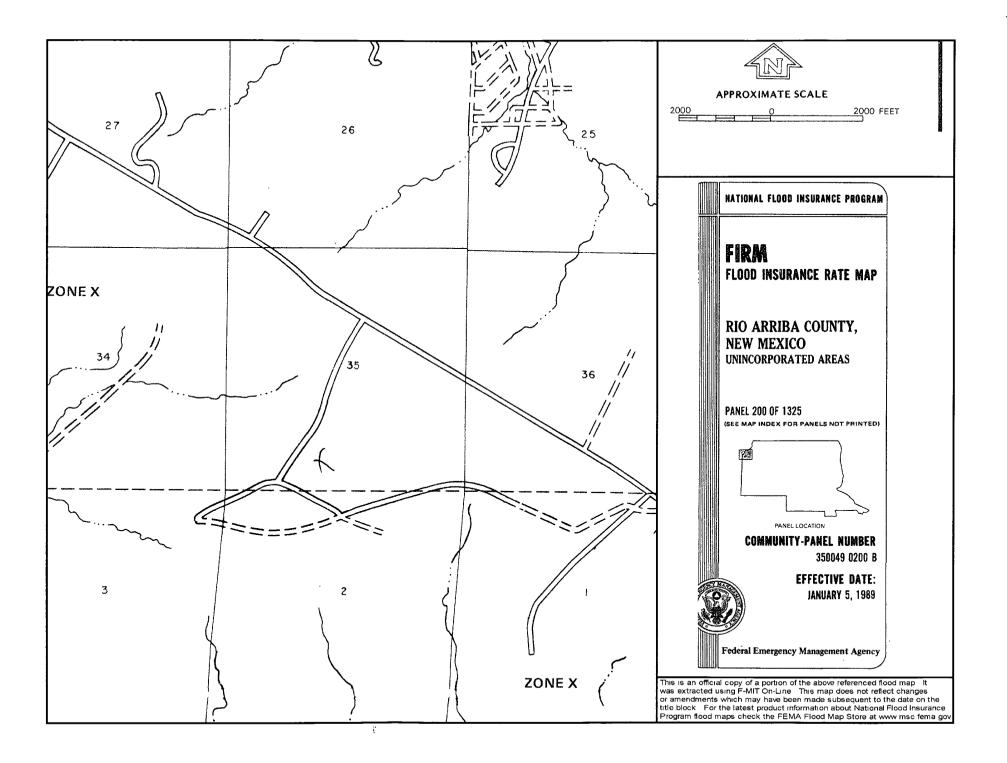

#### Siting Criteria Compliance Demonstration & Hydro Geologic Analysis

The San Juan 29-7 Unit 30N is not located in an unstable area. The location is not over a mine and is not on the side of a hill as indicated on the Mines, Mills and Quarries Map and Topographic Map. The location of the excavated pit material will not be located within 300' of any continuously flowing watercourse or 200' from any other watercourse as indicated on the Topographic Map. The location is not within a 100-year floodplain area as indicated on the FEMA Map. The groundwater depth is considered to be greater than 190' as determined by the topographic map and the Cathodic well data with an elevation of 6594' and groundwater depth of 190'. The hydro geologic analysis indicates the groundwater depth and the San Jose formation will create a stable area for this new location.

#### Hydrogeological report for San Juan 29-7 Unit 30N

#### Regional Hydrogeological context:

The San Jose Formation of Eocene age occurs in New Mexico and Colorado, and its outcrop forms the land surface over much of the eastern half of the central basin. It overlies the Nacimiento Formation in the area generally south of the Colorado-New Mexico State line and overlies the Animas Formation in the area generally north of the State line.

The San Jose Formation was deposited in various fluvial-type environments. In general, the unit consists of an interbedded sequence of sandstone, siltstone, and variegated shale. Thickness of the San Jose Formation generally increases from west to east (200 feet in the west and south to almost 2,700 feet in the center of the structural basin). Ground water is associated with alluvial and fluvial sandstone aquifers. Thus, the occurrence of ground water is mainly controlled by the distribution of sandstone in the formation. The distribution of such sandstone is the result of original depositional extent plus any post-depositional modifications, namely erosion and structural deformation. Transmissivity data for San Jose Formation are minimal. Values of 40 and 120 feet squared per day were determined from two aquifer tests (Stone et al, 1983, table 5). The reported or measured discharge from 46 water wells completed in San Jose Formation ranges from 0.15 to 61 gallons per minute and the median is 5 gallons per minute. Most of the wells provide water for livestock and domestic use.

The San Jose Formation is a very suitable unit for recharge from precipitation because soils that form on the unit are sandy and highly permeable and therefore readily adsorb precipitation. However, low annual precipitation, relatively high transpiration and evaporation rates, and deep dissection of the San Jose Formation by the San Juan River and its tributaries all tend to reduce the effective recharge to the unit.

Stone et al., 1983, Hydrogeology and Water Resources of the San Juan Basin, New Mexico: Socorro, New Mexico Bureau of Mines and Mineral Resources Hydrologic Report 6, 70 p.

#### Tafoya, Crystal

From:

Tafoya, Crystal

Sent:

Thursday, July 10, 2008 8:16 AM

To:

'mark_kelly@nm.blm.gov'

Subject:

**OCD Pit Closure Notification** 

The following temporary pits will be closed on-site. The new OCD Pit Rule 17 requires the surface owner be notified. Please feel free to contact me at any time if you have any questions. Thank you!

Allison Unit 2B

Allison Unit 40N

Angel Peak B 27E

Ballard 11F

Cain 725S

Canyon Largo Unit 250N

Canyon Largo Unit 279E

Canyon Largo Unit 288E

Canyon largo Unit 297E

Canyon Largo Unit 465E

Carson SRC 4E

Day B 4P

Day B 5A

East 17S

**EPNG A 1B** 

EPNG B 1M

Federal A 1E

Filan 5M

Filan 5N

Fogelson 4 100

Fogelson 4 100S

Grambling C 202S

Hagood 19

Hamner 9S

Hardie 4P

Hare 295

Heaton Com 100

Helms Federal 1G

Howell 12

Huerfanito Unit 103F

Huerfanito Unit 29S

Huerfanito Unit 39S

Huerfanito Unit 47S

Huerfanito Unit 50E

Huerfanito Unit 75E

Huerfanito Unit 83E

Huerfanito Unit 87E

Huerfanito Unit 90E

Huerfanito Unit 90M

Huerfanito Unit 98S

Huerfano Unit 108F

Huerfano Unit 282E

Huerfano unit 305

Huerfano unit 307

Huerfano Unit 554

Johnston Federal 24S

King 3

Lackey A Com 100S

Lambe 1C

Lambe 7S

Lively 8M

Lloyd A 100

Llovd A 100S

Martin 100

McCord B 1F

McDurmitt Com 100S

McManus 13R

Mitchell 1S

Morris A 14

Newberry B 1N

Newsom B 503

Newsom B 8N

Pierce A 210S

Roelofs 1N

San Juan 27-4 Unit 132G

San Juan 27-4 Unit 132M

San Juan 27-4 Unit 139N

San Juan 27-4 Unit 140B

San Juan 27-4 Unit 141M

San Juan 27-4 Unit 147Y

San Juan 27-4 Unit 153B

San Juan 27-4 Unit 22M

San Juan 27-4 Unit 38P

San Juan 27-4 Unit 41N

San Juan 27-4 Unit 42N

San Juan 27-4 Unit 569N

San Juan 27-4 Unit 59N

San Juan 27-4 Unit 60M

San Juan 27-5 Unit 113F

San Juan 27-5 Unit 59N

San Juan 27-5 Unit 84N

San Juan 27-5 unit 901

San Juan 27-5 Unit 902

San Juan 27-5 Unit 903

San Juan 27-5 Unit 904

San Juan 27-5 Unit 905

San Juan 27-5 Unit 906

San Juan 27-5 Unit 907

San Juan 27-5 Unit 908

San Juan 27-5 Unit 909

San Juan 27-5 Unit 910

San Juan 27-5 Unit 912 San Juan 27-5 Unit 913

San Juan 27-5 Unit 914

San Juan 27-5 Unit 915

San Juan 27-5 Unit POW 916

San Juan 28-4 Unit 27M

San Juan 28-5 Unit 54F

San Juan 28-5 Unit 62E

San Juan 28-5 Unit 63M

San Juan 28-5 Unit 76N

San Juan 28-5 Unit 77N

San Juan 28-6 Unit 113N

San Juan 28-6 Unit 459S

San Juan 28-7 Unit 151E

San Juan 28-7 Unit 195P

San Juan 29-6 Unit 22N

San Juan 29-6 Unit 8M

#### San Juan 29-7 Unit 30N.

San Juan 29-7 Unit 57E

San Juan 29-7 unit 587

San Juan 29-7 Unit 588

San Juan 29-7 unit 589

San Juan 29-7 Unit 60N

San Juan 29-7 unit 67M

San Juan 29-7 Unit 70M

San Juan 30-5 Unit 27F

San Juan 30-5 Unit 71F

San Juan 30-5 Unit 73N

Oan Juan 30-5 Unit 7514

San Juan 30-6 Unit 441S San Juan 31-6 Unit 24F

San Juan 31-6 Unit 27M

San Juan 31-6 Unit 271V

San Juan 31-6 Unit 31P

San Juan 31-6 Unit 39M

San Juan 31-6 Unit 3M

San Juan 31-6 Unit 45N

San Juan 31-6 Unit 49P

San Juan 31-6 Unit 4N

San Juan 31-6 Unit 4P

San Juan 31-6 Unit 6F

San Juan 31-6 Unit 7M

San Juan 31-6 Unit 8N

San Juan 32-7 Unit 18M

San Juan 32-7 Unit 19A

San Juan 32-7 Unit 71A

San Juan 32-7 Unit Com 20

San Juan 32-8 Unit 18N

San Juan 32-8 Unit 30M

San Juan 32-8 Unit 49M

Storey B LS 100

Storey B LS 100S

Sunray E 221S

Sunray G 2C

Vaughn 15N

Wood 3M

Wood 3N

Crystal L. Tafoya Regulatory Technician ConocoPhillips Company

San Juan Business Unit Phone: (505) 326-9837

Email: Crystal.Tafoya@conocophillips.com

DISTRICT I 1625 N. French Dr., Hobbs, N.M. 88240 State of New Mexico
Energy, Minerals & Natural Resources Department

Form C-102 Revised October 12, 2005

DISTRICT II 1301 West Grand Avenue, Artesia; N.M. 88210

OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505

Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

DISTRICT III 1000 Rio Brazos Rd., Aztec, N.M. 87410

DISTRICT IV 1220 S. St. Francis Dr., Santa Fe, NM 87505 ☐ AMENDED REPORT

### WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API	Number			Pool Code	,	BASIN D	*Pool Nam AKOTA/BLANCC	- ,		
Property C	ode	· · · · · · · · · · · · · · · · · · ·	*	⁵ Property Name						
	-				SAN JUAN 29-7	7 UNIT		ļ	30N	
OGRID No					⁸ Operator	Name			Elevation	
		,	BURL	INGTON RESOURCES OIL AND GAS COMPANY LP					6594	
				, .	10 Surface	Location				
UL or lot no.	Section	Township	Range	Lot ldn	Feet from the	North/South line	Feet from the	East/West line	County	
Ň	35	29-N	7-W	,	805'	SOUTH	1455	WEST	RIO ARRIBA	
		,,,,,,	¹¹ Bott	om Hole	Location I	f Different Fro	m Surface			
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County	
J	35	29-N	7-W		1670'	SOUTH	2560'	EAST	RIO ARRIBA	
Dedicated Acres			18 Joint or	Infill	¹⁴ Consolidation C	ode	¹⁵ Order No.			
.320.00				,						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

16		OK A NON-SIAN	DHIED OMIT HAS D	EEN AFFICOVED DI	THE DIVISION
			USA SF-	-078425	OPERATOR CERTIFICATION  I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organisation either owns a working interest or unlessed mineral interest in the land including the proposed bottom hole location or has a right to drall this well at this location pursuant to a construct with an owner of such a mineral or a working interest, or to a voluntary pooling agreement or a compulsory pooling order heretafore entered by the division.
	,	3	  -  - 	BOTTOM HOLE LAT: 36'40.77779' N. LONG: 107'32.3671' W. NAD 1927 LAT: 36.679639' N. LONG: 107.540058' W. NAD 1983	Signature Printed Name
11	M	SURFACE LAT: 36'40.6369' N. LONG: 107'32.6250' W. NAD 1927 LAT: 36.677289' N. LONG: 107.544357' W. NAD 1983	2560' BOTTOM HOLE	×	SURVEYOR CERTIFICATION  I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.  Date of Survey
	1455' N 887 43' W 2840'	SURFACE		7 10° 37" ¥ 2638.50° ¥ 51° 58" ₩ 43.04°	Signature and Scale of Professional Surveyor:    Signature and Scale of Professional Surveyor:   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703   15703

### Burlington Resources Oil & Gas Company, LP San Juan Basin Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of pit closure. Closure report will be filed on C-144 and incorporate the following:

- Details on Capping and Covering, where applicable.
- Plot Plan (Pit Diagram)
- Inspection Reports
- Sampling Results
- C-105
- Copy of Deed Notice will be filed with County Clerk

#### **General Plan:**

- 1. All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves. The facilities to be used will be Basin Disposal (Permit #NM-01-005) and Envirotech Land Farm (Permit #NM-01-011).
- 2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.
- 3. The surface owner shall be notified of BR's closing of the temporary pit prior to closure as per the approved closure plan via certified mail, return receipt requested.
- 4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.
- 5. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email, or verbally. The notification of closure will include the following:
  - i. Operator's name
  - Location by Unit Letter, Section, Township, and Range. Well name and API number.
- 6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at the San Juan County Landfill located on CR 3100.
- 7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.
- 8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

Components	Tests Method	Limit (mg/Kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	2500
GRO/DRO	EPA SW-846 8015M	_500
Chlorides	EPA 300.1	(1000)500

- 9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.
- 10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.
- 11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road. CR 7175. Permit # NM010011
- 12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Reshaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 13. Notification will be sent to OCD when the reclaimed area is seeded.
- 14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Туре	Variety or Cultivator	PLS/A
Western wheatgrass	Arriba	3.0
Indian ricegrass	Paloma or Rimrock	3.0
Slender wheatgrass	San Luis	2.0
Crested wheatgrass	Hy-crest	3.0
Bottlebrush Squirreltail	Unknown	2.0
Four-wing Saltbrush	Delar	.25

Species shall be planted in pounds of pure live seed per acre: Present Pure Live Seed (PLS) = Purity X Germination/100 Two lots of seed can be compared on the basis of PLS as follows:

Source No. One (poor quality)

Purity

50 percent

Germination

40 percent

Percent PLS

20 percent

Source No. two (better quality)

Purity

80 percent

Germination

63 percent

Percent PLS

50 percent

5 lb. bulk seed required to make 2 lb. bulk seed required to make

1 lb. PLS 1 lb. PLS

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.