District I

1625 N. French Dr., Hobbs, NM 88240

District II 1301 W Grand Ave, Artesia, NM 88210

District III

1220 S St Francis Dr , Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Department Oil Conservation Division 1220 South St. Francis Dr.

For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office

Form C-144

July 21, 2008

1833

1000 Rio Brazos Rd, Aztec, NM 87410 For permanent pits and exceptions submit to the Santa Fe Santa Fe, NM 87505 Environmental Bureau office and provide a copy to the appropriate NMOCD District Office Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request Please be advised that approval of this request does not relieve the operator of hability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances Operator: Burlington Resources Oil & Gas Company, LP OGRID#: 14538 Address: PO Box 4289, Farmington, NM 87499 Facility or well name: Grambling C 1F

| API Number: | 30-045- | -34459 | OCD Permit Number: | | |
|--|---|---|--------------------------------|------------------------------|-----------------------------|
| U/L or Qtr/Qtr: | F(SENW) Section: | 14 Township: 30N | Range: 10W | County: San Juan | |
| Center of Propose | ed Design: Latitude: | 36.815463' N | Longitude: 107 | 7.857322' W NAI | D: 1927 X 1983 |
| Surface Owner: | X Federal | State Private T | rıbal Trust or Indian Allo | tment | |
| Temporary: Permanent X Lined X String-Reinfo | Etton F or G of 19.15.17.11 Ni X Drilling Workover Emergency Cavitati Unlined Liner typorced X Welded X Factory | ion P&A pe: Thickness 20 mil | X LLDPE HDPE Volume: 4400 bbl | | W <u>45'</u> x D <u>10'</u> |
| 3 | | | | - 1. 1. 1. 1. | |
| | | of 19 15.17.11 NMAC | | | |
| Type of Operation | on· P&A Drill | ling a new well Workover o notice of int | · | ies which require prior appr | oval of a permit or |
| Drying Pac | d Above Ground Stee | el Tanks Haul-off Bins | Other | / | 234567887C |
| Lined | Unlined Liner type: | Thickness mil | LLDPE HDPE | PVD Other | |
| Liner Seams: | Welded Factory | Other | _ | 30 | RECEIVED |
| 4 | | | | 282 | |
| Below-grad | | | | 12/2 | OIL CONS. DIV. DIST. 3 |
| Volume: | bbl | Type of fluid | | — \alpha | OIL CONS. DIV. DIST. 3 |
| Tank Construction | | | | | 20212232 |
| | ntainment with leak detection | | er, 6-inch lift and automatic | overflow shut-off | |
| Liner Type | ewalls and liner | Visible sidewalls only ☐O nil ☐HDPE ☐PVC | ther Other | | |
| Liner Type | THICKNESS II | ш Цпрте Цтус | Other | | |
| 5 Alternatis | ve Method: | | | | |
| | | | | | |
| Submittal of an e | exception request is required. | Exceptions must be submitted to | the Santa Fe Environmental | Bureau office for considera | tion of approval |
| | | | | | |

| Fencing: Subsection D of 19 15.17 11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet X Alternate. Please specify 4' hogwire fence with a single strand of barbed wire on top. | | | | | | | | |
|--|-----------------|---------|--|--|--|--|--|--|
| Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Monthly inspections (If netting or screening is not physically feasible) | | | | | | | | |
| Signs: Subsection C of 19.15.17.11 NMAC 12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers X Signed in compliance with 19 15.3.103 NMAC | | | | | | | | |
| Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15 17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for consumer of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. | ideration of ap | proval. | | | | | | |
| Siting Criteria (regarding permitting): 19.15 17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system. | | | | | | | | |
| Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells | Yes | XNo | | | | | | |
| Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site | Yes | XNo | | | | | | |
| Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. | Yes | XNo | | | | | | |
| (Applies to temporary, emergency, or cavitation pits and below-grade tanks) | □NA | | | | | | | |
| Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits) | Yes XNA | ∏No | | | | | | |
| Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. | Yes | XNo | | | | | | |
| - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site. | İ | | | | | | | |
| Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended | Yes | XNo | | | | | | |
| Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site | Yes | XNo | | | | | | |
| Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division | Yes | XNo | | | | | | |
| Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological | Yes | XNo | | | | | | |
| Society; Topographic map Within a 100-year floodplain - FEMA map | Yes | XNo | | | | | | |

| Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19 15 17.9 NMAC | | | | | | | |
|---|--|--|--|--|--|--|--|
| Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached | | | | | | | |
| Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC X Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 | | | | | | | |
| X Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC | | | | | | | |
| X Design Plan - based upon the appropriate requirements of 19.15.17.10 NMAC | | | | | | | |
| X Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC | | | | | | | |
| X Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of | | | | | | | |
| 19.15 17.9 NMAC and 19.15 17 13 NMAC | | | | | | | |
| Previously Approved Design (attach copy of design) API or Permit | | | | | | | |
| Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 | | | | | | | |
| Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC | | | | | | | |
| Design Plan - based upon the appropriate requirements of 19.15.17 11 NMAC | | | | | | | |
| Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC | | | | | | | |
| Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC | | | | | | | |
| Previously Approved Design (attach copy of design) API | | | | | | | |
| Previously Approved Operating and Maintenance Plan API | | | | | | | |
| Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC | | | | | | | |
| Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. | | | | | | | |
| Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15.17.9 NMAC | | | | | | | |
| Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC | | | | | | | |
| Climatological Factors Assessment | | | | | | | |
| Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17 11 NMAC | | | | | | | |
| Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC | | | | | | | |
| Leak Detection Design - based upon the appropriate requirements of 19.15 17.11 NMAC | | | | | | | |
| Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15 17.11 NMAC | | | | | | | |
| Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC | | | | | | | |
| Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.12 NMAC | | | | | | | |
| Nuisance or Hazardous Odors, including H2S, Prevention Plan | | | | | | | |
| Emergency Response Plan | | | | | | | |
| Oil Field Waste Stream Characterization | | | | | | | |
| Monitoring and Inspection Plan | | | | | | | |
| Erosion Control Plan | | | | | | | |
| Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15 17.13 NMAC | | | | | | | |
| 14 Proposed Closure: 19.15.17.13 NMAC | | | | | | | |
| Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. | | | | | | | |
| Type: X Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative | | | | | | | |
| Proposed Closure Method: Waste Excavation and Removal | | | | | | | |
| Waste Removal (Closed-loop systems only) | | | | | | | |
| X On-site Closure Method (only for temporary pits and closed-loop systems) | | | | | | | |
| XIn-place Burial On-site Trench | | | | | | | |
| Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration) | | | | | | | |
| Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. | | | | | | | |
| Please indicate, by a check mark in the box, that the documents are attached. | | | | | | | |
| Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC | | | | | | | |
| Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC | | | | | | | |
| Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) | | | | | | | |
| Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19 15 17.13 NMAC | | | | | | | |
| Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC | | | | | | | |
| Site recommendation 1 into a point the appropriate requirements of Subsection O of 17.13.17.13 INMAC | | | | | | | |

Form C-144 Oil Conservation Division

| Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19 15.17.13 D NMAC) | 954 | | | | | | |
|--|---------------------------|--|--|--|--|--|--|
| Instructions. Please identify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more than two for are required | zames | | | | | | |
| Disposal Facility Name Disposal Facility Permit #: | | | | | | | |
| Disposal Facility Name: Disposal Facility Permit #: | | | | | | | |
| Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future service and operations? Yes (If yes, please provide the information No | | | | | | | |
| Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specification - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC | | | | | | | |
| Siting Criteria (Regarding on-site closure methods only: 19.15.17.10 NMAC Instructions Each sting criteria requires a demonstration of compliance in the closure plan Recommendations of acceptable source material are provided belo certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the for consideration of approval Justifications and/or demonstrations of equivalency are required Please refer to 19 15 17 10 NMAC for guidance | | | | | | | |
| Ground water is less than 50 feet below the bottom of the buried waste. | Yes XNo | | | | | | |
| - NM Office of the State Engineer - IWATERS database search; USGS: Data obtained from nearby wells | ∐N/A | | | | | | |
| Ground water is between 50 and 100 feet below the bottom of the burned waste | X Yes No | | | | | | |
| - NM Office of the State Engineer - IWATERS database search; USGS; Data obtained from nearby wells | ∐N/A | | | | | | |
| Ground water is more than 100 feet below the bottom of the buried waste. | Yes X No | | | | | | |
| - NM Office of the State Engineer - IWATERS database search; USGS; Data obtained from nearby wells | N/A | | | | | | |
| Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). | Yes X No | | | | | | |
| - Topographic map; Visual inspection (certification) of the proposed site | | | | | | | |
| Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application - Visual inspection (certification) of the proposed site; Aerial photo; satellite image | Yes X No | | | | | | |
| Tisular hispection (certification) of the proposed site, remain proto, succine image | Yes X No | | | | | | |
| Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the time of the initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted | Yes XNo | | | | | | |
| pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality, Written approval obtained from the municipality | | | | | | | |
| Within 500 feet of a wetland | Yes X No | | | | | | |
| - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site | | | | | | | |
| Within the area overlying a subsurface mine. | Yes X No | | | | | | |
| Written confirantion or verification or map from the NM EMNRD-Mining and Mineral Division Within an unstable area. | Yes X No | | | | | | |
| - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; | | | | | | | |
| Topographic map | | | | | | | |
| Within a 100-year floodplain - FEMA map | Yes X No | | | | | | |
| On-Site Closure Plan Checklist: (19.15 17.13 NMAC) Instructions: Each of the following items must bee attached to the closur by a check mark in the box, that the documents are attached. | re plan. Please indicate, | | | | | | |
| X Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC | | | | | | | |
| Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17 13 NMAC | | | | | | | |
| Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC | | | | | | | |
| Construction/Design Plan of Temporary Pit (for in place burial of a drying pad) - based upon the appropriate requirements of 1 | 9.15.17.11 NMAC | | | | | | |
| X Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC | | | | | | | |
| Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC | | | | | | | |
| Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC | | | | | | | |
| X Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards ca | nnot be achieved) | | | | | | |
| X Soil Cover Design - based upon the appropriate requirements of Subsection H of 19 15 17 13 NMAC X Re-vegetation Plan - based upon the appropriate requirements of Subsection L of 19 15 17 13 NMAC | | | | | | | |
| X Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC X Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC | | | | | | | |

Form C-144 Oil Conservation Division

Page 4 of 5

| Operator Application | n Contification. | | , | |
|--|---|--|---|---|
| Operator Application Learning that the | | ation is true, accurate and complete | to the best of my knowledge and belief | |
| Name (Print) | Crystal Tafoya | Title. | Regulatory Technician | |
| Signature | 1 Anti | Jan Date | 10/3/08 | |
| e-mail address. | crystal.tafoya@conocophil | | 505-326-9837 | ····· |
| e man address. | | | | |
| 20 | | | ,, | |
| OCD Approval: | Permit Application (including clos | sure plan) Closure Plan (| only) OCD Conditions (see at | tachment) |
| OCD Representative | Signature: Branch | on Formell | Approval Date: | 11-4-08 |
| Title: | Emiro/spec | OCD | Permit Number: | |
| | | | | |
| Instructions: Operators report is required to be | | osure plan prior to implementing an is of the completion of the closure ac inties have been completed. | NMAC y closure activities and submitting the citivities. Please do not complete this se losure Completion Date: | |
| | | | losure Completion Date. | |
| 22 Closure Method: | | | | |
| | on and Removal On-site Cl | osure Method Alternative C | losure Method Waste Removal | (Closed-loop systems only) |
| If different from | n approved plan, please explain. | | | |
| | | | | |
| 23 Closure Report Regar | ding Waste Removal Closure For Clo | osed-loop Systems That Utilize Abo | ove Ground Steel Tanks or Haul-off B | ins Only: |
| Instructions: Please ide | | | ll cuttings were disposed. Use attachm | |
| vere utilized. | | Dunand E | la militar Danisari Mirinah am | |
| Disposal Facility Na Disposal Facility Na | | | acility Permit Number: acility Permit Number: | |
| | | <u> </u> | will not be used for future service and of | oneartions? |
| | ase demonstrate complilane to the items | _ | will not be used for future service and t | peartions |
| | ed areas which will not be used for futi | _ | | |
| | on (Photo Documentation) | • | | |
| = | and Cover Installation | | | |
| Re-vegetation A | Application Rates and Seeding Technique | ue | | |
| 24 | | | | |
| | Attachment Checklist: Instructions: cuments are attached. | : Each of the following items must | be attached to the closure report. Plea | se indicate, by a check mark in |
| _ ′ | are Notice (surface owner and division | on) | | |
| | Notice (required for on-site closure | * | | |
| Plot Plan (for | on-site closures and temporary pits) | | | |
| Confirmation | Sampling Analytical Results (if appl | licable) | | |
| = | al Sampling Analytical Results (if ap | | | |
| = | ity Name and Permit Number | ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,, | | |
| <u> </u> | g and Cover Installation | | | |
| | Application Rates and Seeding Tecl | hnique | | |
| | ion (Photo Documentation) | • | | |
| On-site Closur | re Location: Latitude: | Longitude: | NAD | 1927 1983 |
| | | | | |
| 25 | | | | ` |
| Operator Closure C | <u></u> | | | |
| | information and attachments submitted th all applicable closure requirements | - | curate and complete to the best of my k oved closure plan. | nowledge and belief I also certify that |
| Name (Print) | | Title: | • | |
| Signature: | | Date. | | |
| | | | _ | |
| e-mail address: | | Telephon | e: | |

Form C-144 Oil Conservation Division Page 5 of 5


New Mexico Office of the State Engineer POD Reports and Downloads


| | Sections: 10,11,12,13,14,15,22,23,24 | | | | | | | |
|--|--------------------------------------|--|--|--|--|--|--|--|
| NAD27 X: Y: Zone: Search Radius: | | | | | | | | |
| County: Basin: Number: Suffix: | | | | | | | | |
| Owner Name: (First) (Last) Onn-Domestic Onestic All | c | | | | | | | |
| POD / Surface Data Report Avg Depth to Water Report | | | | | | | | |
| Water Column Report | | | | | | | | |
| Clear Form iWATERS Menu Weller of the color | | | | | | | | |
|) | ********** | | | | | | | |

WATER COLUMN REPORT 10/01/2008

| | | | | | | | 3=SW 4=SE) smallest) | | | Depth | Depth | Wat∈ |
|------------|-----|-----|-----|---|---|---|-------------------------|---|---|-------|-------|-------|
| POD Number | Tws | Rng | Sec | q | q | đ | Zone | x | Y | Well | Water | Colum |
| SJ 00024 | 30N | 10W | 23 | 2 | 4 | 2 | | | | 305 | | |
| SJ 00051 | 30N | 10W | 23 | 2 | 4 | 2 | | | | 305 | | |
| SJ 00197 | 30N | 10W | 23 | 4 | 2 | | | | | 975 | 500 | 47 |
| SJ 00010 | 30N | 10W | 24 | 2 | | | | | | 292 | | |

Record Count: 4

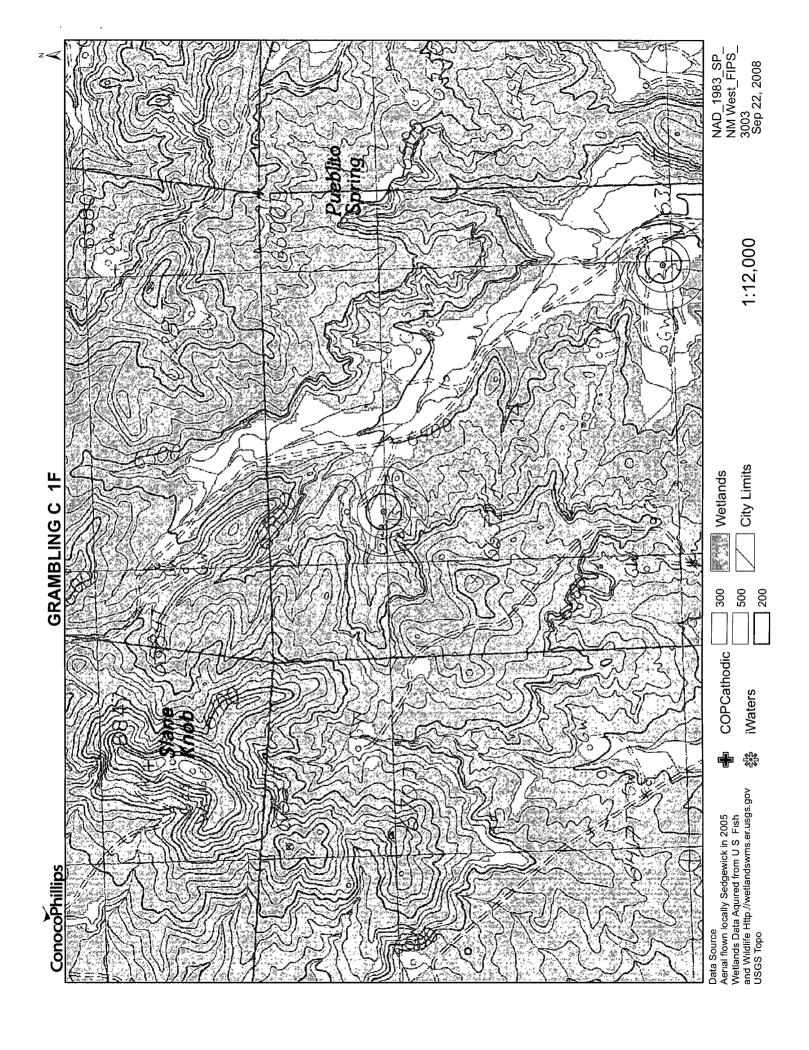

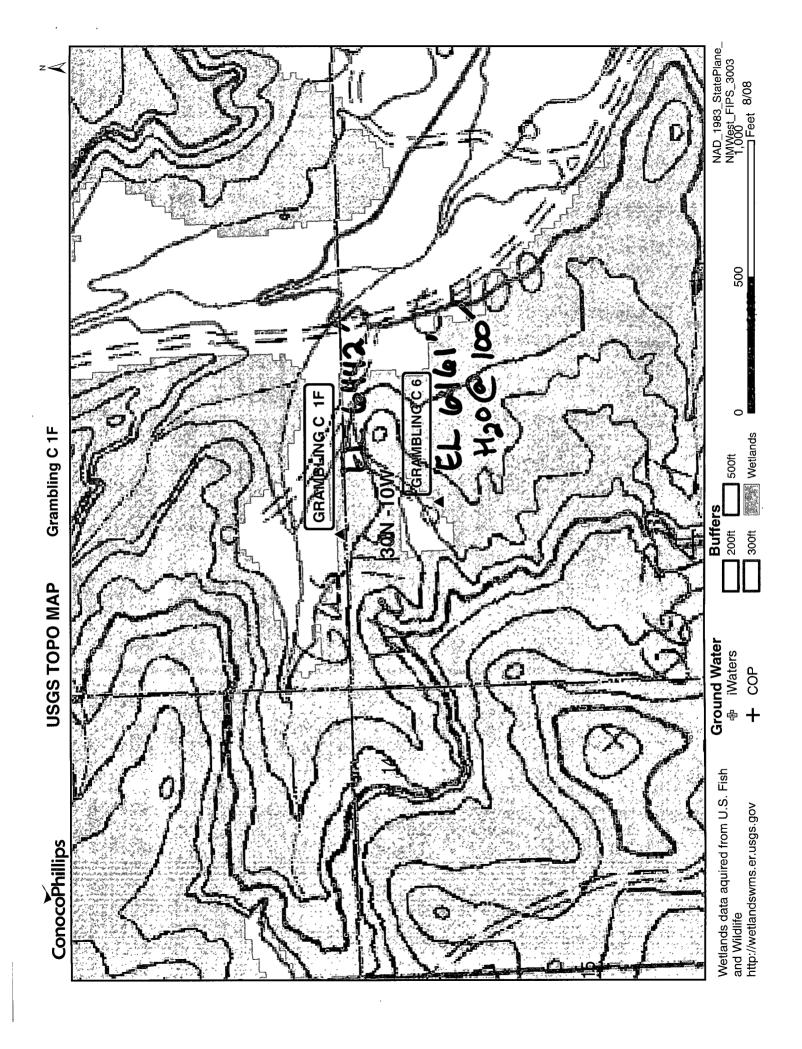

2-30-045-09442 5-30-045-20779 13-30-045-26599

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

| Operator | MERIDIAN OIL | Location: | Unit_SW Sec. 14 Twp 30F | Rng_10_ |
|-----------|----------------------------------|------------------|-----------------------------|---------|
| Name of | Well/Wells or Pipeline Se | erviced GRAM | BLING C #2, #5, #13 | |
| | | | cps 25 | lw |
| Elevation | on 6500 Completion Date 10/ | 31/73 Total De | pth <u>400'</u> Land Type*_ | N/A |
| Casing, | Sizes, Types & Depths | N/A | | |
| If Casir | ng is cemented, show amour | its & types us | edN/A | |
| | nt or Bentonite Plugs have /A | been placed, | show depths & amounts | used |
| Depths 8 | thickness of water zones | with descrip | tion of water when pos | sible: |
| Fresh, (| Clear, Salty, Sulphur, Etc | 100' | TE SEIVE | |
| Depths o | gas encountered: N/A | | MAY31 1991 | |
| | amount of coke breeze used | | OIL CON. DIV | |
| Depths a | anodes placed: 350', 341', | 332', 323', 256' | , 248', 185', 175', 145', | 120' |
| Depths v | vent pipes placed: N/A | | | |
| Vent pip | pe perforations: 270' | • | | |
| Remarks: | _gb_#2 | | | |
| | | | | |

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

^{*}Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee. If Federal or Indian, add Lease Number.

El Pasa Natural Gas Comrany Porm 7-238 (Rev. 1-69)

WELL CASING CATHODIC PROTECTION CONSTRUCTION REPORT DAILY LOG

prieta

Drilling Log (Attach Hereto).

Well Name

| CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No | CPS No |

| Remarks: Pril | lor said water @ 100'. | Water Standing |
|---------------|------------------------|-----------------|
| _ | AFTOY 30 MIN STOP | • |
| | WITH WATER Logger | |
| VENT | Hose Par for stod 270' | PUMPED 46 STEKS |
| | 17 SICKS | |

32 (3),20 472,30 Coxe 9.40 (14)

All Construction Completed

Eduard R. Paulok

N

GROUND BED LAYOUT SKETCH

2,717.20 137.50 Depining

no'→ }

Grambling cos

brambling c #2

₩ 61818 # 1

Original & 1 Copy All Reports

EL PASO NATURAL GAS COMPANY ENGINEERING DEPARTMENT

Sheet _____of___ Date: 10/31/7:

| | | 25/W | - - · - |
|---|--|--------------------------------------|---------------|
| | | .71 801.7 1 Drillex 5010 1107 2010 | ļ |
| | 100 | | ĺ |
| | 10 | 3 90,9 1,2 Deres 30 M, a | † |
| MW gala/mol 16 C ₁ 6 4 30 C ₂ 9 56 44 C ₃ 10 42 58 IC ₄ 12 38 | | 5 12 Filed with water | 1 |
| 72 105 13 85 | 20 | 7-18 300,8,9 Logged \$70m 120' |] |
| 86 ICh 15 50 C6 15 57 100 IC7 17 2 C7 17 46 114 C8 19 38 28 C5 9 64 | | 41.5 1.8 9 100 1050 1000 1000 | 12 |
| 4E C3 9 67 | 30 | 3 1.0 10 .8 .9 | |
| , · · · | | 3 1 1 0 | |
| 7.7 | 40 | 4 1.9 30 1.1 1.2 | 1 |
| ··. | | 6 2.0 · · · /. 7 1,7 20 5 e | 1 |
| · | 50 | 4 19 3. 2 2. 0 2 3 47 5 2 2 9 | 1 |
| , | 60 | 4 9 140 1, 9 1, 9 3 3 3 2 2 3.3 | 1 |
| | | 4/10 1.1.7 1.7 4 333 1.5 2.7 | |
| | 70 | 3 1.1 30.1.5 1.4 5 356 2.8 3.6 |]` |
| 8 - 2 78 | | 8-20-101.1 6 248 1.6 3.1 | |
| - | 80 | | 1 |
| | | 8 2.3 1 1.71.7 8 175 1.7 3.4 | - |
| · | 90 | 5 101 70 0 0 0 9 14 14 1 1 1 1 1 1 1 | 1 |
| мас . | 200 | | 1 |
| MW gels/mol 44 CO2 6 38 34 H2S 5 17 28 N2 4 16 2 H2 3 38 | 200 | 3 . 5 . 1.1 1.1 1.7 12.0 0.97 | 1 |
| · | 10 | 3 5 -70 1.1 | 1 |
| ., | : | 3 .5 397907 |] |
| | 20 | 31.5 700 1 | 1 |
| . ; ; . . | · | 2 .5 | - |
| | 70 | .3.6 .3.7 Pun 200 46 50 a 49 | - |
| • | 4 | 13.7 PUM 200 46 50 0 A S | - ,. |
| | 10 10 10 10 10 10 10 10 10 10 10 10 10 1 | | ┨ |
| · | 50 | 8 2 0 TOTO! 6 3 SOCKS | |
| • | | 1.7.2.3 | |
| , | 50 | 7. 3. 7. 2- | 1 |
| • | | .5.6 |] |
| | 70 | , 5 , 5 | |
| | | . # . 7 | |

HIMBER OF COP . & RECEIVED C.STRIBUTION BANTA FF FILE U 40.5 LAND OFFICE TRANSPONTER GAS PROMATION OFFICE OFFAATOR

NEW MEXICO OIL CONSERVATION COMMISSION Santa Fe. New Mexico

(Form C-104) Revised 7/1/57


REQUEST FOR (OIL) - (GAS) ALLOWAPLE


New Well

This form shall be submitted by the operator before an initial allowable will be assigned to any completed Oil or Gas well. Form C-104 is to be submitted in QUADRUPLICATE to the same District Office to which Form C-101 was sent. The allowable will be assigned effective 7:00 A.M. on date of completion or recompletion, provided this form is filed during calendar month of completion or recompletion. The completion date shall be that date in the case of an oil well when new oil is delivered into the stock tanks Gas must be reported on 15.025 psia at 60° Fahrenheit.

| | | | | | | New Mexico | October 24 | 1962 |
|-------------|-----------|--|-----------------|-------------------------------------|-------------------------|--|----------------------|----------------|
| | | | 01100011 | | (Place) | | (Date | e |
| | | | | NG AN ALLOWABLE | | | Cm 11 | . - |
| ĐI | (Compan | s or Oper | ator: | mpany Grambling | 5 Well No | i n | 3B 1/4 1 | /4, |
| F | | Sec. | 14 | , T30-N , R | O-W NMPM | Aztec Pictur | ed Cliffs | Pool |
| Und | Latter | , 500. | | | | | | |
| Ser | i Juan | | | . County. Date Spudd | ed 8-5-62 | Date Drilling C | cupleted 8-2 | 4 -62 |
| | | dicate loc | | Elevation 6451 Top Oil/Gas Pay | Tota 3090 Perf Name | of Ered. Form. | rictured Cliffs | 113 |
| D | С | В | Å | PRODUCING INTERVAL - | | 77 | ···· | |
| | <u> </u> | <u> </u> | | Perforations 3090 | -96;3110- 16;312 | 28-34; | | |
| E | F | G | H | Open Hole None | Dent | h | Depth Tubino | |
| ł | Х | | | OIL WELL TEST - | | | | |
| L | K | J | I | Natural Prod. Test: | bbls.oii, | bbls water in | hrs,min | Choke Size |
| | | | | Test After Acid or Fr | acture Treatment (aft | er recovery of your | e of oil equal to vo | .ume of |
| М | N | 0 | P | load oil used): | bbls,oil, | bbls water in | Ch hrs, min. Si | oke ≀e |
| L | | | | GAS NELL TEST - | | | | |
| 16 | 50'N, 1 | | | Natural Prod. Test: | MCF/ | Day; Hours flowed | Choke Size | |
| tubing | Casing | | ting Record | • | | | | |
| Sız | | Feet | Sax | Test After Acid or Fr | | | Tax: House flowed | 3 |
| 9 5/ | /8" | 109 | 70 | Choke Size 3/4" | | | | |
| 2 7, | | 3219 | 210 | Acid or Factor Treasend): 20,000 ga | tmant (Give amounts o | f materials uses, su L,000# sand | h as acid, water, o | , and |
| | | | | Casing 1005 Tubi Press. Pres | | | | |
| | | | | Cil Transporter El | | | pany | |
| | | | | Gas Transporter El | | | FOE! A | |
| Remark | u: | ······································ | | | | | SIPLIAED | |
| *********** | | | | | | | OCT 2 (1 196) | |
| . 11 | nereby ce | rtify tha | t the infor | rmation given above is | true and complete t | to the best of my kno | whidecon Co. | |
| Approv | edili | :اد.⊊د | 76 _t | , 19 | ****** | (Company or C | Operator) | · · · |
| | OIL C | ONSER | VATION | COMMISSION | By: | IAL SIGNED HE M | CANALLY | |
| | ο. | 1.0 | 11 ** | W D C · · | ent t | Petroleum En | | |
| - | _ | - | • | W. B. Smith | Sen | id Communications | regarding wenter. | |
| Title! | DEPUTY | 01 <u>8</u> 2 | AS MISPEC | CTOR DIST. NO 3 | Name | E. S. Oberly | · | |
| | | | | | | Par 020 m | | |


Grambling C 1F Mines, Mills and Quarries Web Map

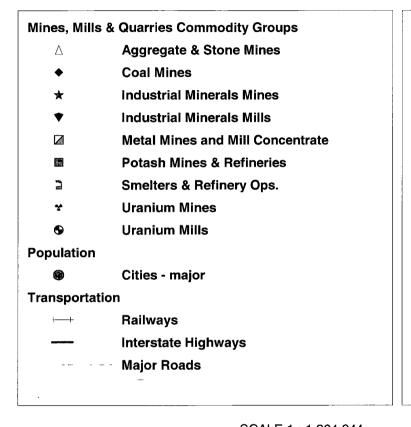

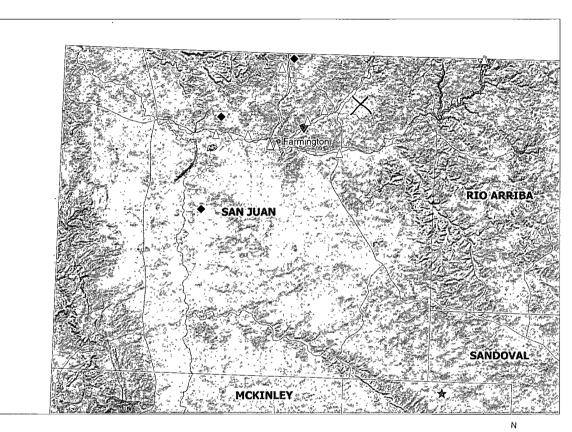





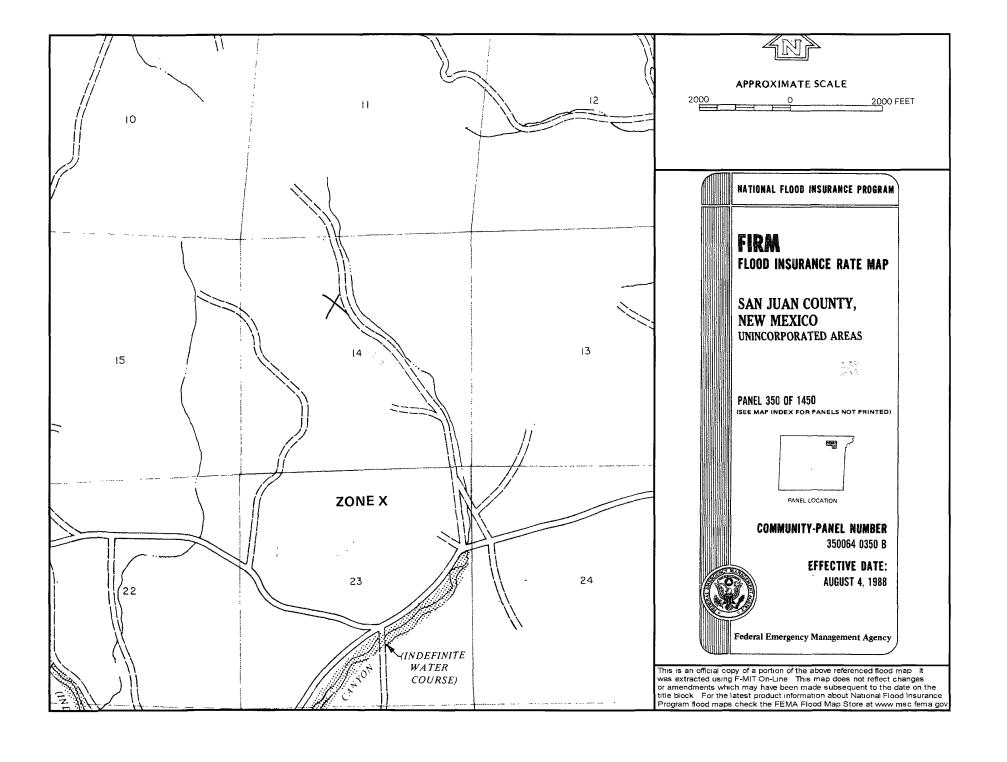

Hydrogeological report for Grambling C 1F

Regional Hydrogeological context:

The San Jose Formation of Eocene age occurs in New Mexico and Colorado, and its outcrop forms the land surface over much of the eastern half of the central basin. It overlies the Nacimiento Formation in the area generally south of the Colorado-New Mexico State line and overlies the Animas Formation in the area generally north of the State line.

The San Jose Formation was deposited in various fluvial-type environments. In general, the unit consists of an interbedded sequence of sandstone, siltstone, and variegated shale. Thickness of the San Jose Formation generally increases from west to east (200 feet in the west and south to almost 2,700 feet in the center of the structural basin). Ground water is associated with alluvial and fluvial sandstone aquifers. Thus, the occurrence of ground water is mainly controlled by the distribution of sandstone in the formation. The distribution of such sandstone is the result of original depositional extent plus any post-depositional modifications, namely erosion and structural deformation. Transmissivity data for San Jose Formation are minimal. Values of 40 and 120 feet squared per day were determined from two aquifer tests (Stone et al, 1983, table 5). The reported or measured discharge from 46 water wells completed in San Jose Formation ranges from 0.15 to 61 gallons per minute and the median is 5 gallons per minute. Most of the wells provide water for livestock and domestic use.

The San Jose Formation is a very suitable unit for recharge from precipitation because soils that form on the unit are sandy and highly permeable and therefore readily adsorb precipitation. However, low annual precipitation, relatively high transpiration and evaporation rates, and deep dissection of the San Jose Formation by the San Juan River and its tributaries all tend to reduce the effective recharge to the unit.

Stone et al., 1983, Hydrogeology and Water Resources of the San Juan Basin, New Mexico: Socorro, New Mexico Bureau of Mines and Mineral Resources Hydrologic Report 6, 70 p.

Siting Criteria Compliance Demonstration & Hydro Geologic Analysis

The Grambling C 1F is not located in an unstable area. The location is not over a mine and is not on the side of a hill as indicated on the Mines, Mills and Quarries Map and Topographic Map. The location of the excavated pit material will not be located within 300' of any continuously flowing watercourse or 200' from any other watercourse as indicated on the Topographic Map. The location is not within a 100-year floodplain area as indicated on the FEMA Map. The groundwater depth is considered to be greater than 80' as determined by the topographic map and the Cathodic well data from the Grambling C 6 with an elevation of 6461' and groundwater depth of 100'. The subject well has an elevation of 6442' which is slightly less than the Grambling C 6, therefore the groundwater depth is greater than 80'. There are no iWATERS data points located in the area as indicated on the TOPO Map. The Cathodic data provided the indication of groundwater depth is greater than 80'. The hydro geologic analysis indicates the groundwater depth and the San Jose formation will create a stable area for this new location.

Tafoya, Crystal

From:

Tafoya, Crystal

Sent:

Wednesday, October 01, 2008 9:53 AM

To: Subject:

'mark_kelly@nm.blm.gov' Surface Owner Notification

The temporary pits for the following wells will be closed on-site. Please contact me with any questions.

Cleveland 220S Cleveland 2S Hamner 2M Grambling C 1F

Thank you,

Crystal L. Tafoya Regulatory Technician ConocoPhillips Company San Juan Bassans

Phone: (505) 326-9837

Email: Crystal.Tafoya@conocophillips.com

| | | | • | | | |
|--|--|---|-----------------------------|-------------------------|--|--|
| DISTRICT I 1626 N. French Dr., Hobbs, | N.M. 88240 Ene | State of Norgy, Minerals & Nature | ew Mexico | rent. | Revised (| Form C-102 October 12, 2005 |
| DISTRICT II 1301 West Grand Avenue, Ar | , | OIL CONSERVAT | ION DIVISION | | | te District Office |
| DISTRICT III | | 1220 South St Santa Fe, | . Francis Dr. | CT 9 200 | State L | ease - 4 Copies ease - 3 Copies |
| 1000 Rio Brazos Rd., Aztec, DISTRICT IV 1220 S. St. Francis Dr., Sar | | | Duma | ot Land Manag | gement | ENDED REPORT |
| | WELL LO | CATION AND A | CREAGE DEDI | CATION PL | AT | |
| *API Number 30-045- 3 | 1459 | Pool Code 71599 | , | Pool Name | | |
| ⁴ Property Code | | *Proper | ty Name | | | Well Number |
| 7056 | | GRAMBLI | | | | 1F |
| ************************************** | ti cerra | Operatory | OF Name | NV ID | | Elevation 6442 |
| | L , Boxin | | | | | 0442 |
| UL or lot no. Section | Township Range | Lot In Peet from the | e Location North/South line | Peet from the | East/West line | County |
| F 14 | 30-N 10-W | (6) 1310 | NORTH | 1600' | WEST | SAN JUAN |
| UL or lot no. Section | | | If Different From | | | |
| F Section | Township Range | Lot Idn Feet from th | North/South line | Foot from the | East/West line | County |
| Dedicated Acres | ¹³ Joint or I | nfill "Consolidatio | n Code | ¹⁵ Order No. | L | |
| 311.78 () | 12). | | | , | | |
| NO ALLOWABLE V | | TO THIS COMPLET NDARD UNIT HAS | | | | CONSOLIDATED |
| LOT 4 N 88' 05' 39' 2632,34' | | LOT 2 | Lo | | ERATOR CEF | |
| | | USA SIF_ONDEROU_A | | to true and | | ation contained heroin i of my knowledge and |
| 2563.81. 2563.81. | 1310' | 8200 | | a working | interest or unleased | mineral interest in the ion hole location or this location pursuant |
| 1 88 89 1 88 89 | ** | a one | | to a contra | ct with an owner of triverest or to a volu | euch a mineral or ntaru poolina aareemeni |
| s [®] 1600'. | 1 | SA | | distrion. | itsury pooling order h | erelafore entered by the |
| LOT 5 | Not lor 6 | 107 2 | LOT | | . | |
| 202 0 | '29' LOT 6 | LOT 7 | 201 | | to Ph.C | 8/28/07 |
| | LAT: 36'46.9275' N. LONG: 107'51.4022' W. | | | Signatur | | |
| | NAD 1927 LAT: 36.815463 N. | | | Printed | y Clugston Name | |
| | LONG: 107.857322 W. NAD 1963 1 | 1 | | | | |
| LOT 12 | LOT 11 | LOT 10 | LO | r 9 18 SU | RVEYOR CEI | RTIFICATION |
| | | San | | was plotted | from field notes of a say superviolen, an | oution shown on this plat actual surveys made by d that the same is true |
| | | | | and correct | to the best of my be | 07 |

LOT 15

LOT 13

LOT 14

Burlington Resources Oil & Gas Company, LP San Juan Basin Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of pit closure. Closure report will be filed on C-144 and incorporate the following:

- Details on Capping and Covering, where applicable.
- Plot Plan (Pit Diagram)
- Inspection Reports
- Sampling Results
- C-105
- Copy of Deed Notice will be filed with County Clerk

General Plan:

- All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves. The facilities to be used will be Basin Disposal (Permit #NM-01-005) and Envirotech Land Farm (Permit #NM-01-011)
- 2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.
- 3. The surface owner shall be notified of BR's closing of the temporary pit prior to closure as per the approved closure plan via certified mail, return receipt requested.
- 4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.
- 5. Notice of Closure will be given prior to the Aztec Division office between 72 hours and one week via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.
- 6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at the San Juan County Landfill located on CR 3100.
- 7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.
- 8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

| Components | Tests Method | Limit (mg/Kg) |
|------------|---------------------------|---------------|
| Benzene | EPA SW-846 8021B or 8260B | 0.2 |
| BTEX | EPA SW-846 8021B or 8260B | 50 |
| TPH | EPA SW-846 418.1 | 2500 |
| GRO/DRO | EPA SW-846 8015M | 500 |
| Chlorides | EPA 300.1 | 1000(500), |

9. A five point composite sample will be taken from the cavitation pit pursuant to 19.15.17.13(B)(1)(b)(i) in order to assure there has not been any type of release.

| Components | Tests Method | Limit (mg/Kg) |
|------------|---------------------------|---------------|
| Benzene | EPA SW-846 8021B or 8260B | 0.2 |
| BTEX | EPA SW-846 8021B or 8260B | 50 |
| TPH | EPA SW-846 418.1 | 2500 |
| GRO/DRO | EPA SW-846 8015M | 500 |
| Chlorides | EPA 300.1 | 500 |

- 10. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.
- 11. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.
- 12. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011
- 13. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 14. Notification will be sent to OCD when the reclaimed area is seeded.
- 15. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

| Туре | Variety or Cultivator | PLS/A |
|--------------------------|--------------------------|-------|
| Western wheatgrass | Arriba | 3.0 |
| Indian ricegrass | Paloma or Rimrock | 3.0 |
| Slender wheatgrass | San Luis | 2.0 |
| Crested wheatgrass | Hy-crest | 3.0 |
| Bottlebrush Squirreltail | Unknown | 2.0 |
| Four-wing Saltbrush | Delar | .25 |

Species shall be planted in pounds of pure live seed per acre: Present Pure Live Seed (PLS) = Purity X Germination/100 Two lots of seed can be compared on the basis of PLS as follows:

Source No. One (poor quality)

Purity

Source No. two (better quality)

5 lb. bulk seed required to make 2 lb. bulk seed required to make

1 lb. PLS 1 lb. PLS

16. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.