District I 1625 N French Dr , Hobbs, NM 88240

State of New Mexico **Energy Minerals and Natural Resources** Form C-144 July 21, 2008

District II

1301 W Grand Ave , Artesia, NM 88210

District III 1000 Rio Brazos Rd, Aztec, NM 87410

District IV 1220 S St Fran

Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office

1220 S St Francis Dr., Santa Fe, NM 8/303	
Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application	
Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method	
Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit	
X Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system,	
below-grade tank, or proposed alternative method	
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative req	uest
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances	
1	
Operator: Burlington Resources Oil & Gas Company, LP OGRID#: 14538 Address: PO Box 4289, Farmington, NM 87499	
Facility or well name: Day B 4P	
API Number: 30-045-34505 OCD Permit Number:	
U/L or Qtr/Qtr: C(NENW) Section: 7 Township: 27N Range: 8W County: San Juan	
Center of Proposed Design: Latitude: 36.359508' N Longitude: 107.72545' W NAD: 1927 X	1983
Surface Owner: X Federal State Private Tribal Trust or Indian Allotment	-
Temporary: X Drilling Workover Permanent Emergency Cavitation P&A X Lined Unlined Liner type Thickness 20 mil X LLDPE PVC Other X String-Reinforced Liner Seams X Welded X Factory Other Volume 4400 bbl Dimensions L 65' x W 45' x D	
3 Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit notice of intent)	or
Drying Pad Above Ground Steel Tanks Haul-off Bins Other Lined Unlined Liner type. Thickness mil LLDPE HDPE PVD Other Liner Seams: Welded Factory Other	678s 7
4 Below-grade tank: Subsection I of 19.15.17 11 NMAC Volume: bbl Type of fluid: OCT	2008
Tank Construction material:	2008
Tank Construction material: Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off	717076
	212076

Alternative Method:

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

6 • 1										
Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks)										
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, insti	atution or chur	ch)								
Four foot height, four strands of barbed wire evenly spaced between one and four feet										
X Alternate. Please specify 4' hogwire fence with a single strand of barbed wire on top.										
7										
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)										
Screen Netting Other										
Monthly inspections (If netting or screening is not physically feasible)										
Sings Coloration Cod 10 15 17 11 NBAAC										
Signs: Subsection C of 19.15.17.11 NMAC 12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers										
X Signed in compliance with 19.15.3.103 NMAC										
9										
Administrative Approvals and Exceptions:										
Justifications and/or demonstrations of equivalency are required Please refer to 19.15.17 NMAC for guidance.										
Please check a box if one or more of the following is requested, if not leave blank:										
Administrative approval(s): Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for constant.	deration of ap	proval.								
Exception(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.										
10										
Siting Criteria (regarding permitting): 19.15.17.10 NMAC										
Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the										
appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for										
consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.										
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes	XNo								
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa	Yes	XNo								
lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site										
	□Yes	X No								
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.		AINO								
(Applies to temporary, emergency, or cavitation pits and below-grade tanks)	NA									
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image										
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	No								
(Applied to permanent pits)	XNA									
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	П.,									
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	Yes	XNo								
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site.										
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	Yes	XNo								
- Written confirmation or verification from the municipality; Written approval obtained from the municipality		₩ .								
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes	X No								
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	□Yes	XNo								
Within an unstable area.	∏Yes	X No								
- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological	🗀 🍱	٠٠٠ <u>- ت</u>								
Society; Topographic map		V V								
Within a 100-year floodplain	Yes	X No								

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17 9 NMAC
X Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9
X Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
X Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
X Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17 12 NMAC
X Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API or Permit
12
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15 17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9
Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17 10 NMAC
Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15.17.9
NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API
Previously Approved Operating and Maintenance Plan API
Permanent Pits Permit Application Checklist: Subsection B of 19.15 17.9 NMAC
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15.17.9 NMAC
Stting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
Climatological Factors Assessment
Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC
Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC
Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC
Quality Control/Quality Assurance Construction and Installation Plan
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19 15.17 11 NMAC
Nuisance or Hazardous Odors, including H2S, Prevention Plan
Emergency Response Plan
Oil Field Waste Stream Characterization
Monitoring and Inspection Plan
Erosion Control Plan
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
14
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Alternative Dranged Clause Methods Wester Frequetion and Removal
Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only)
X On-site Closure Method (only for temporary pits and closed-loop systems)
X In-place Burial On-site Trench
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Alternative Closure Method (Exceptions must be sublifficed to the Santa Fe Environmental Dureau for Consideration)
15
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.
Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15 17.13 NMAC
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15 17.13 NMAC
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15 17.13 NMAC

Form C-144 Oil Conservation Division Page 3 of 5

16 Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel T	anks or Haul-off Bins Only: (19 15 17 13 D NMAC)	
Instructions: Please identify the facility or facilities for the disposal of liquids, drilling flu	ds and drill cuttings Use attachment if more than two fa	cilities
are required. Disposal Facility Name D	isposal Facility Permit #:	
	isposal Facility Permit #	
Will any of the proposed closed-loop system operations and associated activities of Yes (If yes, please provide the information No	<u> </u>	
Required for impacted areas which will not be used for future service and operations. Soil Backfill and Cover Design Specification - based upon the appropriate Re-vegetation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection	n I of 19.15.17.13 NMAC	;
17		
Siting Criteria (Regarding on-site closure methods only: 19.15.17.10 NMAC Instructions Each siting criteria requires a demonstration of compliance in the closure plan Receivant siting criteria may require administrative approval from the appropriate district office or in for consideration of approval Instifications and/or demonstrations of equivalency are required.	aay be considered an exception which must be submitted to the S	
Ground water is less than 50 feet below the bottom of the buried waste.		Yes X No
- NM Office of the State Engineer - iWATERS database search; USGS: Data obtained	d from nearby wells	∐N/A
Ground water is between 50 and 100 feet below the bottom of the buried waste		Yes X No
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtaine	d from nearby wells	∐N/A
Ground water is more than 100 feet below the bottom of the buried waste.		X Yes No
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtaine	d from nearby wells	□N/A
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significan (measured from the ordinary high-water mark).	watercourse or lakebed, sinkhole, or playa lake	Yes X No
- Topographic map, Visual inspection (certification) of the proposed site		
Within 300 feet from a permanent residence, school, hospital, institution, or church in exi - Visual inspection (certification) of the proposed site; Aerial photo; satellite image	stence at the time of initial application	Yes X No
		Yes X No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than to purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence - NM Office of the State Engineer - iWATERS database; Visual inspection (certification)	e at the time of the initial application.	
Within incorporated municipal boundaries or within a defined municipal fresh water well pursuant to NMSA 1978, Section 3-27-3, as amended.		Yes X No
- Written confirmation or verification from the municipality; Written approval obtain Within 500 feet of a wetland		Yes X No
- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspect	ion (certification) of the proposed site	Dv. VNs
Within the area overlying a subsurface mine. - Written confirantion or verification or map from the NM EMNRD-Mining and Min	eral Division	Yes X No
Within an unstable area.		Yes X No
 Engineering measures incorporated into the design; NM Bureau of Geology & Mine Topographic map 	ral Resources, USGS; NM Geological Society;	
Within a 100-year floodplain. - FEMA map		Yes X No
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of	the following items must bee attached to the closur	e plan. Please indicate.
by a check mark in the box, that the documents are attached.	, ,	•
X Siting Criteria Compliance Demonstrations - based upon the appropriate re		
X Proof of Surface Owner Notice - based upon the appropriate requirements		
Construction/Design Plan of Burial Trench (if applicable) based upon the	** *	
Construction/Design Plan of Temporary Ptt (for in place burial of a drying		9.15.17 11 NMAC
X Protocols and Procedures - based upon the appropriate requirements of 19		
Confirmation Sampling Plan (if applicable) - based upon the appropriate re	•	
X Waste Material Sampling Plan - based upon the appropriate requirements		anot be achieved)
 \overline{X}\) Disposal Facility Name and Permit Number (for liquids, drilling fluids and \overline{X}\) Soil Cover Design - based upon the appropriate requirements of Subsection 	•	moi de aemeveu)
X Re-vegetation Plan - based upon the appropriate requirements of Subsection		
X Site Reclamation Plan - based upon the appropriate requirements of Subse		

19 ′	,
Operator Application Certification:	
I hereby certify that the information submitted with this application is true, accurately (D. 1)	
Name (Print): Crystal Tafoya	Title Regulatory Technician
Signature: motal Taloga	Date:/0/3/08
e-mail address: crystal tafoya@conocophilubs com	Telephone:505-326-9837
20 OCD Approval: Permit Application (including closure plan) OCD Representative Signature: Branchon Dans Title: Enviro (spec	Closure Plan (only) OCD Conditions (see attachment) Approval Date: 11-4-08
Title: Envirolspec	OCD Permit Number:
21 Closure Report (required within 60 days of closure completion): Substitutions: Operators are required to obtain an approved closure plan prior t	section K of 1915 1713 NMAC o implementing any closure activities and submitting the closure report. The closure on of the closure activities Please do not complete this section of the form until an
22	
Closure Method: Waste Excavation and Removal On-site Closure Method If different from approved plan, please explain.	Alternative Closure Method Waste Removal (Closed-loop systems only)
23	
Closure Report Regarding Waste Removal Closure For Closed-loop System Instructions: Please identify the facility or facilities for where the liquids, dril	is That Utilize Above Ground Steel Tanks or Haul-off Bins Only: ling fluids and drill cuttings were disposed. Use attachment if more than two facilities
were utilized.	D. J. D. W. J.
Disposal Facility Name:	Disposal Facility Permit Number:
Disposal Facility Name:	Disposal Facility Permit Number:
Were the closed-loop system operations and associated activities performed Yes (If yes, please demonstrate compliane to the items below)	No
Required for impacted areas which will not be used for future service and of	
Site Reclamation (Photo Documentation)	ACTURIOUS.
Soil Backfilling and Cover Installation	
Re-vegetation Application Rates and Seeding Technique	
Closure Report Attachment Checklist: Instructions: Each of the foll the box, that the documents are attached. Proof of Closure Notice (surface owner and division) Proof of Deed Notice (required for on-site closure) Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (if applicable) Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) On-site Closure Location: Latitude:	Longitude:NAD
25	
Operator Closure Certification:	re report is ture, accurate and complete to the best of my knowledge and belief. I also certify that becified in the approved closure plan
Name (Print):	Title.
Signature.	Date.
e-mail address:	Telephone:

Form C-144 Oil Conservation Division

New Mexico Office of the State Engineer POD Reports and Downloads


Towns	hip: 27N Range: 08	BW Sections:				
NAD27	X: Y:	Zone:		Search Radius:		
County:	Basin:		da S	Number:	Suffi	x:
Owner Name: (F	irst)	(Last) (East)) Non-Domestic	e ODome	estic
- Should the	POD / Surface Data R	eport // Water Column Rep	14467) — 1800 — 300 - 20	Water Report	S. S	
	Clear Form	n WATERS	Menu	lelp		
77		WATER COLUMN	REPORT 10)/01/2008	and the state of t	***************************************
POD Number SJ 02410	(quarters are 1=N (quarters are big Tws Rng Sec 27N 08W 36	gest to smalle		Depth Y Well 2200	n Depth Water	Wate Colum


Record Count: 1

New Mexico Office of the State Engineer POD Reports and Downloads

		······································	(congression control constitution control cont	Characteristic Control of the Contro								
Towns	ship: 27N Ra	ange: 09W	Sections:									
NAD27	X:[Y:	Zone:		Search Ra	dius:						
County:		Basin:			Number:	1	Suffix	:				
Owner Name: (F	First)	(Last)) ⊚ All		○Non-Do	mestic	⊙Dome	stic				
- er 20-2	POD / Surface Data Report Avg Depth to Water Report Water Column Report											
	CI	ear Form	IWATERS M	enu	Help							
	erre (C. g. errep (C. g.	WATE	R COLUMN F	REPORT 1	.0/01/200	8	the constitution of the state o					
POD Number	(quarters a	re 1=NW 2=NE re biggest t g Sec q q q	o smallest			Depth Well	Depth Water	Wat∈ Colum				

No Records found, try again

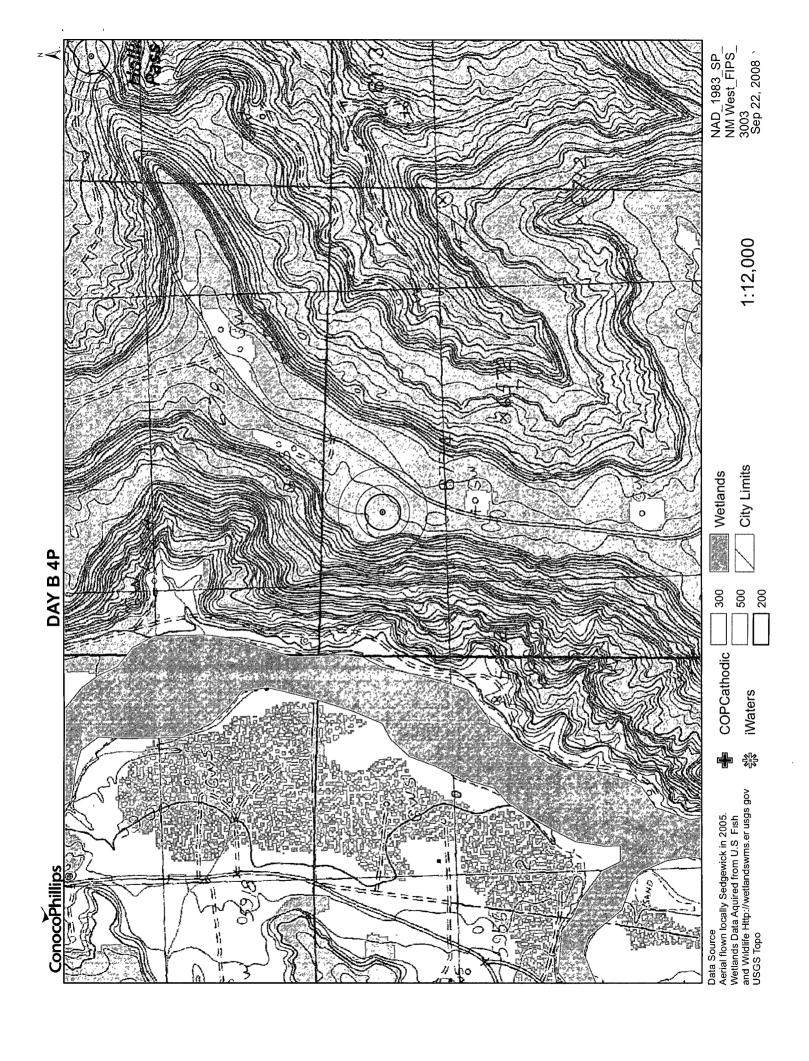

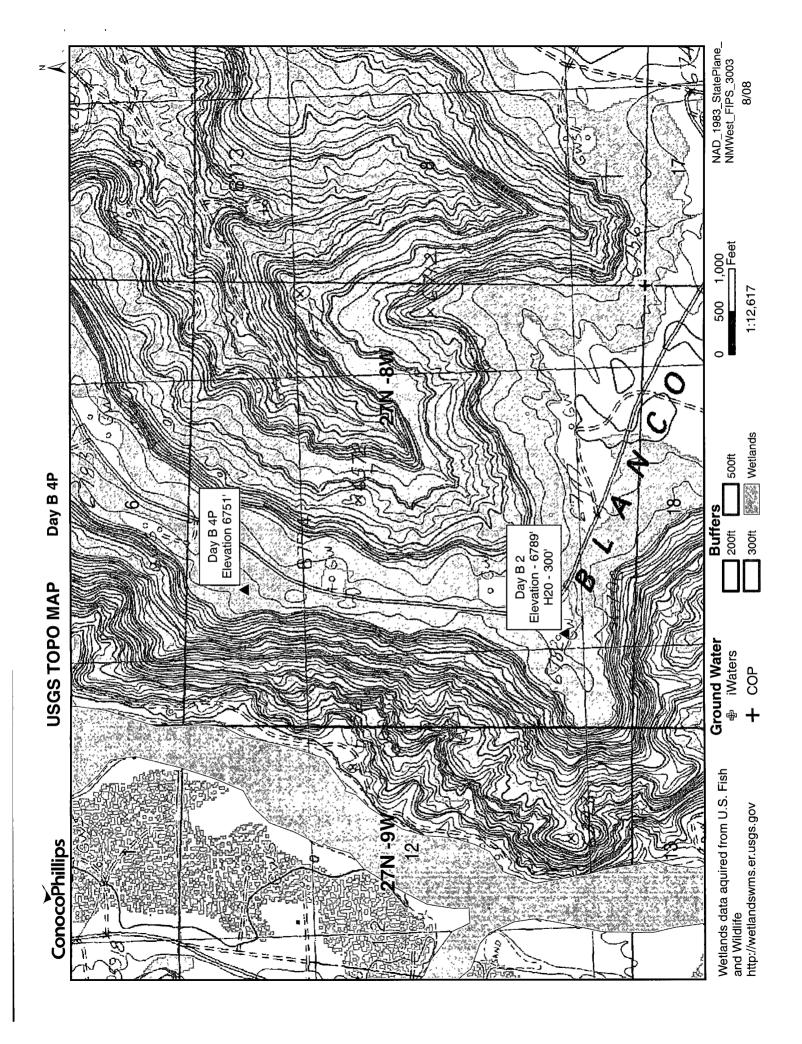

. 2-30-045-06598

4-30-045-20338 DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

0-30-045-06678
Name of Well/Wells or Pipeline Serviced Day "B" 2, 4, 6, & 7
Elevation 6789 Completion Date 2/27/91 Total Depth 300 Land Type* F Casing, Sizes, Types & Depths N/A
If Casing is cemented, show amounts & types used N/A
If Cement or Bentonite Plugs have been placed, show depths & amounts used
Depths & thickness of water zones with description of water when possibles
Fresh, Clear, Salty, Sulphur, Etc. Moisture only
Depths gas encountered: N/A
Type & amount of coke breeze used: Carbo-40, 99.9% Carbon=2466 lbs.
Depths anodes placed: 150', 160', 170', 180', 190', 200'
Depths vent pipes placed: 0 to 300' deep
Vent pipe perforations: Laser cut slots from 100' to 300' deep WARI 91991
Remarks: First Ground Bed Installed at this Location ON CON. DIV.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee. If Federal or Indian, add Lease Number.

Unocal Cro 1: 757-00084 WELL

. OHE RESISTANCES S/ RELIGION JATUR

			•		•	•									
								VIOLET REVITABLE							
0550		Anode		LOG	ANODE)EED	VIODI VIODI		neel.		anoin	1	_	110 COKE	COKE
VEEP	MIUD	HOL			12		ועטיוני	110.	DEEL	VIIODE	llo,	7	DEPTH		5.1
ئ			TU2	4.1	1	<u> 365</u>			5 <u>45</u>				195	11.60	201
10	 -]	130	<u>45</u>	اجــــــــــــــــــــــــــــــــــــ	3.16			ÿ <u>50</u> .						
15			195	4,6		.375			555						
20			500	3.4		380	 		<u> 560</u>]
25	•		205	34		305			565			!		<u>.</u>	l
30			510	3,5		390			570						<u> </u>
.35_			212	28		.395		,	575				1	,	1
40			220	2.7		400	1		500						
45			225	2.6		405			505			-			
50			230	3.2	-	410			590		·			[
			- 1	2.2											7
.55 60			235	73 25		<u>415</u>			5.25 (41)			-	- -	<u> </u>	
			240_			#50			<u>600</u>			-		ļ 	
65			245_	30		425		<u> </u>	<u>605</u>				-	[
10			250_	2.3		130			610						
<u> 75</u>			255	20		135		<u> </u>	615				<u> </u>		<u> </u>
60			500	29		440			<u>620</u>				 		<u> </u>
85			265	22		445			625	<u>:</u>				 	<u> </u>
90			210	1.9		h50	1]	630						1
95			215	2.8		455	1		632			1		}	1
		-					1		1						
100			500	20		<u>460</u>	1—	<u> </u>	640]]		 	
105			5 U 2	1.9		465	 		<u>615</u>	<u>. </u>					.]
110			290	2.0		470			650			.		<u> </u>	
115			295	all	<u> </u>	135		ļ	655		ļ			\	
120			300	IHP		480			660						1
125			305			485			665			1-	-		1
130			310			490			610						
135	4.6					495	_		615					\	1
			315_					 							·
	7.5		320_			500			6110	 -				l	<u> </u>
120	4,8	_	325.			505			Gu2	 -		-			
120	ا النت	9_	330_			<u> 510</u>			<u>690</u>			_			-
155	50	كما	335			<u>515</u>			<u>695</u>	 				<u> </u>	
160	4.8	5;	340			520			100						.
165	4.9	1 d	345			525			105						
170	4.8	4	350			530			710			1			
	4.5	 										1			.
115	10	1 ~ 1	355.			_53 5		 	115			1-		l	· [
100	<u>" / </u>	<u> 12 </u>	360			540			120	===	l====	=		l 	
EHAR	(Bt	300.		ig .	6"×6	20	OA	Huer	D		Ha	٦.	27-91	Jave	a bri
ab	ent	100	, \									si ipgvar	79.22		
	•									10.0		a r	,, ,, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		
		, 1 1		organia (II)	, Cherille	Se. 11 (14.5%)	an i midis k	1,441.					•		
							and the same of	3.15				•			
						_			_						A CONTRACTOR OF THE PARTY OF TH

Asi:

MO-TE DRILLING, INC. ARRIVED TOWN 7100 FEET 300 BIT RECORD SIZE & MAKE CIRCULATION MATERIAL NO. OF LOADS OF WATER

NEW MEXICO OIL CONSERVATION COMMISSION . Santa Fe, New Mexico


(Form C-104) Revised 7/1/57

REQUEST FOR (OIL) - (GAS) ALLOWABLE

New Well


This form shall be submitted by the operator before an initial allowable will be assigned to any completed Oil or Gas well. Form C-104 is to be submitted in QUADRUPLICATE to the same District Office to which Form C-101 was sent. The allowable will be assigned effective 7:00 A.M. on date of completion or recompletion, provided this form is filed during calendar month of completion or recompletion. The completion date shall be that date in the case of an oil well when new oil is delivered into the stock tanks. Cas must be reported on 15.025 psia at 60° Fahrenheit.

						Farmington (Place)	, New 1	Mexico	Septemb	(Date)
			•			R A WELL KN	_	_		
	_	_		Ompany		, Well No	2-B(I	K) in E	W	5W .1/4
		y or Oper		т 27%	(Lease) D EW	, NMPM.,	South	Blanco I	P.C.	D.
U=H	Letter									
San	Juar	1		County. Da	ate Spudded	2-25-5 8	Date	Drilling Co		4-28-58
Ple	ease in	dicate lo	ation:			Total				0. 5320'
	C	В	A			Name	of Prod.	Form.	e com en	QIII I
				PRODUCING I		-0-1			•	
: +	F	G	H		s 28 46		<u> </u>		Depth	
	•		"	Open Hole	None	Casir	ng Shoe	30531	Tubing_	2684'
\rightarrow		 		OIL WELL TE	<u>sī</u> -					
·	K	J	I	Natural Pro	d. Test:	bbls.oil,	bb	ls water in	hrs,	Choke min. Size_
						e Treatment (afte				
	N	0	P	load oil us	ed):t	bls.oil,	bbls w	ater in'	hrs,	Choke min. Size
X				GAS WELL TE						
-84	10'B.	1090 W			=	MCF/I	Saut Haim	e £1 awad	Challa	C:
		-	ting Recor			back pressure, et				51 Ze
Size		Feet	Sax			re Treatment:				Flowed 3
				7		of Testing:				Tiowed
0 3,	<u>/4" </u>	161.	150	CHOKE 312e	JI 4 Ine Cito	y or resering				
7 5	/81	3041	200			(Give amounts of				water, oil, and
1 2	"	30-1	200		5.280 gal.	Date first		xd. 🔑		
5 1,	/2"	2348	250	Casing Press	Press.	843 oil run to	tanks			
2"		52801				o Mataral Ge			mytorial	لللتللا
4ب		266	#22	-		o Matural Ge			- SF	P1 0 1958
narks	: . [nkar "	GJ"pk	r. @ 3041'	·····	***************************************	·····			
•••••										CON, COM. DIST. 3
				•••••••••		***************************************				,,,,,
I he						and complete to				
rove	19	EP 101	958	September	5, 1958	El Paso		al Ges Co ompany or O		
						ву:Ог.:{		-		ton
		_		COMMISSI		By:Ul{	ຊ.ເນຝານ.	Signatur)	t)	77.II
		_		ry C. Arn		Title Petr	oleum :	Engineer		
						1 1115		unications r	egarding v	vell to:
e	•••••	Supe	visor Dis	L # 3		No-c E	. s. o	berly		
										Mand
						AddressBo	× 997,	ferming	con, Men	PETICO

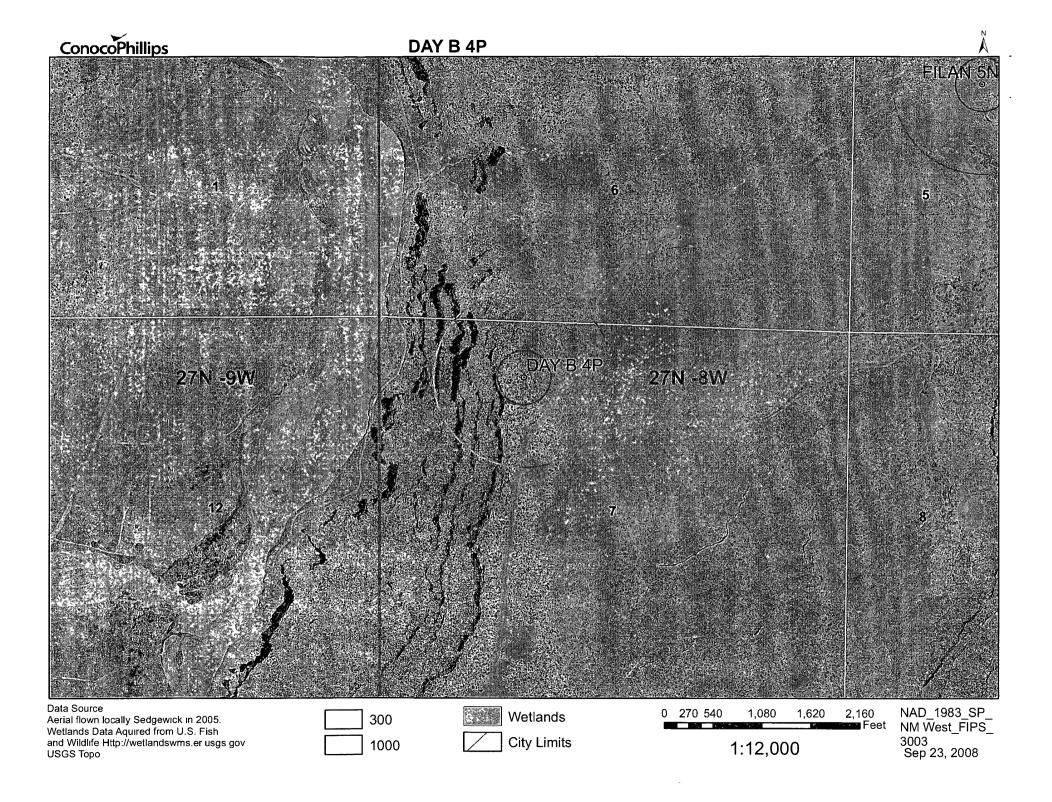


Day B 4P Mines, Mills and Quarries Web Map

Mines, Mills & Quarries Commodity Groups **Aggregate & Stone Mines Coal Mines Industrial Minerals Mines** Industrial Minerals Mills **Metal Mines and Mill Concentrate Potash Mines & Refineries** Smelters & Refinery Ops. **Uranium Mines Uranium Mills Population** 0 Cities - major **Transportation** Railways **Interstate Highways Major Roads**

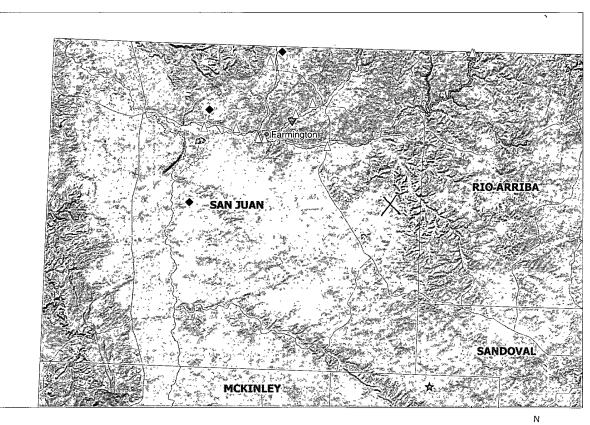





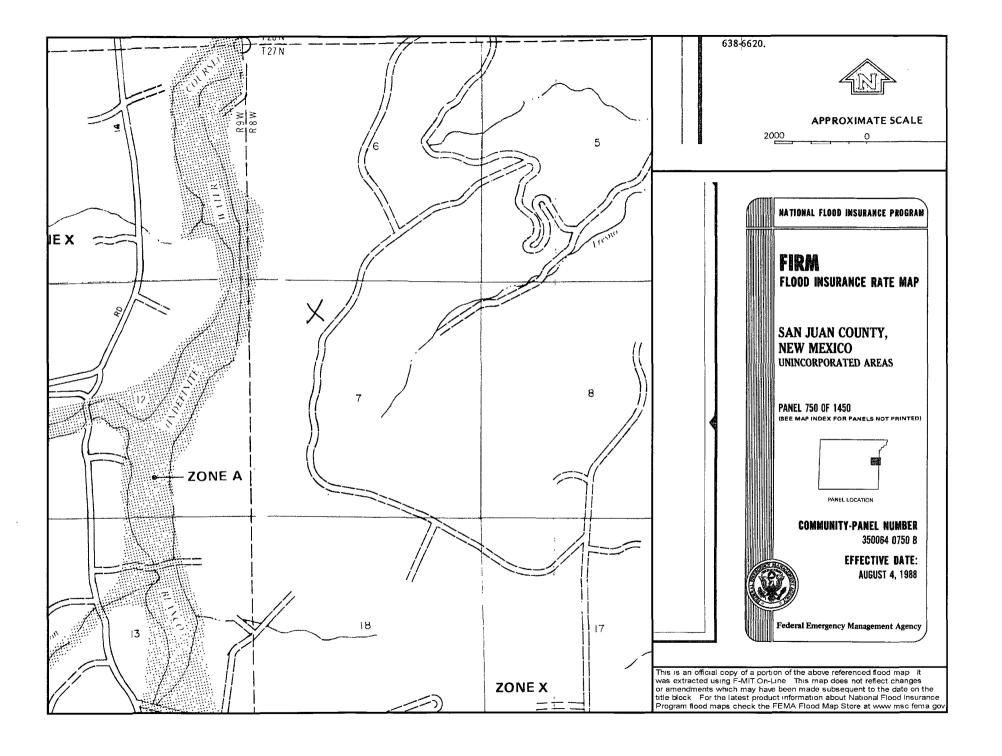

Hydrogeological report for Day B 4P

Regional Hydrogeological context:

The San Jose Formation of Eocene age occurs in New Mexico and Colorado, and its outcrop forms the land surface over much of the eastern half of the central basin. It overlies the Nacimiento Formation in the area generally south of the Colorado-New Mexico State line and overlies the Animas Formation in the area generally north of the State line.

The San Jose Formation was deposited in various fluvial-type environments. In general, the unit consists of an interbedded sequence of sandstone, siltstone, and variegated shale. Thickness of the San Jose Formation generally increases from west to east (200 feet in the west and south to almost 2,700 feet in the center of the structural basin). Ground water is associated with alluvial and fluvial sandstone aquifers. Thus, the occurrence of ground water is mainly controlled by the distribution of sandstone in the formation. The distribution of such sandstone is the result of original depositional extent plus any post-depositional modifications, namely erosion and structural deformation. Transmissivity data for San Jose Formation are minimal. Values of 40 and 120 feet squared per day were determined from two aquifer tests (Stone et al, 1983, table 5). The reported or measured discharge from 46 water wells completed in San Jose Formation ranges from 0.15 to 61 gallons per minute and the median is 5 gallons per minute. Most of the wells provide water for livestock and domestic use.

The San Jose Formation is a very suitable unit for recharge from precipitation because soils that form on the unit are sandy and highly permeable and therefore readily adsorb precipitation. However, low annual precipitation, relatively high transpiration and evaporation rates, and deep dissection of the San Jose Formation by the San Juan River and its tributaries all tend to reduce the effective recharge to the unit.

Stone et al., 1983, Hydrogeology and Water Resources of the San Juan Basin, New Mexico: Socorro, New Mexico Bureau of Mines and Mineral Resources Hydrologic Report 6, 70 p.

Siting Criteria Compliance Demonstration & Hydro Geologic Analysis

The Day B 4P is not located in an unstable area. The location is not over a mine and is not on the side of a hill as indicated on the Mines, Mills and Quarries Map and Topographic Map. The location of the excavated pit material will not be located within 300' of any continuously flowing watercourse or 200' from any other watercourse as indicated on the Topographic Map. The location is not within a 100-year floodplain area as indicated on the FEMA Map. The groundwater depth is considered to be greater than 100' as determined by the topographic map and the Cathodic well data from the Day B 2 with an elevation of 6789' and groundwater depth of at least 300'. The subject well has an elevation of 6751' which is slightly less than the Day B 2, therefore the groundwater depth is greater than 100'. There are no iWATERS data points located in the area as indicated on the TOPO Map. The Cathodic data provided the indication of groundwater depth is greater than 100'. The hydro geologic analysis indicates the groundwater depth and the San Jose formation will create a stable area for this new location.

Tafoya, Crystal

From:

Tafoya, Crystal

Sent:

Thursday, July 10, 2008 8:16 AM

To:

Subject:

'mark_kelly@nm.blm.gov' OCD Pit Closure Notification

The following temporary pits will be closed on-site. The new OCD Pit Rule 17 requires the surface owner be notified. Please feel free to contact me at any time if you have any questions. Thank you!

Allison Unit 2B

Allison Unit 40N

Angel Peak B 27E

Ballard 11F

Cain 725S

Canyon Largo Unit 250N

Canyon Largo Unit 279E

Canyon Largo Unit 288E

Canyon largo Unit 297E

Canyon Largo Unit 465E

Carson SRC 4E

Day B 4P

Day B 5A

East 17S

EPNG A 1B

EPNG B 1M

Federal A 1E

Filan 5M

Filan 5N

Fogelson 4 100

Fogelson 4 100S

Grambling C 202S

Hagood 19

Hamner 9S

Hardie 4P

Hare 295

Heaton Com 100

Helms Federal 1G

Howell 12

Huerfanito Unit 103F

Huerfanito Unit 29S

Huerfanito Unit 39S

Huerfanito Unit 47S

Huerfanito Unit 50E

Huerfanito Unit 75E

Huerfanito Unit 83E

Huerfanito Unit 87E

Huerfanito Unit 90E

Huerfanito Unit 90M

Huerfanito Unit 98S

Huerfano Unit 108F Huerfano Unit 282E

Huerfano unit 305

Huerfano unit 307

Huerfano Unit 554

Johnston Federal 24S

OISTRICT 1 1625 N. French Dr., Hobbs, N.M. 88240

DISTRICT II 1301 W Grand Ave., Artesia, N.M. 88210

DISTRICT III 1000 Rio Brozos Rd , Aztec, NM 87410

1220 South St. Francis Dr., Santo Fe, NM 87505

State of New Mexico RECEIVED

Form C-102 Revised October 12, 2005

Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISIONOV 0 8 2007 it to Appropriate District Office

State Lease - 4 Copies 1220 South St. Froncis Dr.

Bureau of Land Management Fee Leose - 3 Copies Santa Fe, NM 87505 Farmington Field Office

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

30-1145- 34	505	72319/71599	Pool Name BASIN DAKOTA/BLANCO MESA	/ERDE
Property Code 6948		dı	* Well Number 4 P	
14538 No		_	perator Nome ES OIL & GAS COMPANY, LP	Elevatron 6751

¹⁰ Surface Location Ronge UL of lot no Township Lot idn Feet from the North/South line East/West line Feet from the County C 27-N 8-W 660 NORTH 1625 WEST SAN JUAN

"Bottom Hole Location of Different From Surface

Ut or fol no	Section _	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
¹² Dedicated Acres		٧ در	zint or infill		"Consolidation Cod	je	¹³ Order No.		
320.	44 W/2								

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED THE DIVISION

(-	OR A NON-STANDARD UN	TIME DEEN AFTROVED E
CALC'D. CORNER FROM REFERENCE	FD 3 1/4 1955 B.L.M.	BC.
1625'	N 88*16 2610.2	5'36" W .
N 00.19.39" E 2604.49" (C) 5 101 5	SURFACE	D 83)
FD. 2 1/2" BC 1917 GLO	7	
 	USA SF-078571	
		i.
\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	· !	,
LOT 4	1	
<u> </u>	=====	

OPERATOR CERTIFICATION

creby certify that the information contained herein true and complete to the best of my knowledge and set, and that this arganization either awas a working rest or unleased immeral interest in the land luding the proposed bottom hole location or has a nt to drift this well at this location pursuant to a stract with an owner of such a mineral or working more on whiter Ot Such a Mineral or working trest, or to a voluntary pooling agreement or a impulsory pooling order heretafore entered by the islan.

9/21/2007 Coodwir

SURVEYOR CERTIFICATION

by certify that the well location shown on this plat platted from field nates of actual surveys made by me nder my supervision, and that the same is true and ct to the best of my belief



Burlington Resources Oil & Gas Company, LP San Juan Basin Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of pit closure. Closure report will be filed on C-144 and incorporate the following:

- Details on Capping and Covering, where applicable.
- Plot Plan (Pit Diagram)
- Inspection Reports
- Sampling Results
- C-105
- Copy of Deed Notice will be filed with County Clerk

General Plan:

- 1. All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves. The facilities to be used will be Basin Disposal (Permit #NM-01-005) and Envirotech Land Farm (Permit #NM-01-011).
- 2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.
- 3. The surface owner shall be notified of BR's closing of the temporary pit prior to closure as per the approved closure plan via certified mail, return receipt requested.
- 4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.
- 5. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.
- 6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at the San Juan County Landfill located on CR 3100.
- 7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.
- 8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

Components	Tests Method	Limit (mg/Kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	2500
GRO/DRO	EPA SW-846 8015M	√ 5Q0
Chlorides	EPA 300.1	(1000)500

- 9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.
- 10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.
- 11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011
- 12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Reshaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 13. Notification will be sent to OCD when the reclaimed area is seeded.
- 14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Туре	Variety or Cultivator	PLS/A
Western wheatgrass	Arriba	3.0
Indian ricegrass	Paloma or Rimrock	3.0
Slender wheatgrass	San Luis	2.0
Crested wheatgrass	Hy-crest	3.0
Bottlebrush Squirreltail	Unknown	2.0
Four-wing Saltbrush	Delar	.25

Species shall be planted in pounds of pure live seed per acre: Present Pure Live Seed (PLS) = Purity X Germination/100 Two lots of seed can be compared on the basis of PLS as follows:

Source No. One (poor quality)

Purity

50 percent

Germination

40 percent

Percent PLS

20 percent

Source No. two (better quality)

Purity

80 percent

Germination

63 percent

Percent PLS

50 percent

5 lb. bulk seed required to make 2 lb. bulk seed required to make

1 lb. PLS 1 lb. PLS

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.