District I

1625 N French Dr , Hobbs, NM 88240

State of New Mexico Energy Minerals and Natural Resources Form C-144 July 21, 2008

Department

Oil Conservation Division 1220 South St. Francis Dr.

For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office

District II 1301 W Grand Ave , Artesia, NM 88210

District III

1000 Rio Brazos Rd , Aztec, NM 87410	Santa Fe, NM 87505	For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the
District IV 1220 S St Francis Dr., Santa Fe, NM 87505		appropriate NMOCD District Office
104	Closed-Loop System, Below-Grand	
Proposed A	Iternative Method Permit or Cl	losure Plan Application
Type of action: Pern	nit of a pit, closed-loop system, below-grade	e tank, or proposed alternative method
Clos	ure of a pit, closed-loop system, below-grad	de tank, or proposed alternative method
Mod	lification to an existing permit	
	ure plan only submitted for an existing perm w-grade tank, or proposed alternative metho	mitted or non-permitted pit, closed-loop system, od
Instructions: Please submit one application	n (Form C-144) per individual pit, closed-	loop system, below-grade tank or alternative request
**		ons result in pollution of surface water, ground water or the
environment. Nor does approval refleve the oper	ator of its responsibility to comply with any other applica	able governmental authority's rules, regulations or ordinances
Operator: Burlington Resources Oil & Gas O	Company, LP	OGRID#: 14538
Address: PO Box 4289, Farmington, NM 8	7499	
Facility or well name: San Juan 28-5 Unit 63	M	
API Number: 30-039-304	OCD Permit Nur	mber:
U/L or Qtr/Qtr: O(SW/SE) Section: 20	Township: 28N Range:	5W County: Rio Arriba
Center of Proposed Design: Latitude:	36.384545°N Longitude:	107.228301°W NAD: X 1927 1983
Surface Owner: X Federal S	tate Private Tribal Trust or Inc	dian Allotment .
X Pit: Subsection F or G of 19.15 17.11 NMAGE Temporary:	P&A Thickness 12 mil X LLDPE	HDPE
Type of Operation P&A Drilling Drying Pad Above Ground Steel Talling Lined Unlined Liner type Liner Seams: Welded Factory	a new well Workover or Drilling (Applies notice of intent)	s to activities which require prior approval of a permit or HDPE PVD Other RECEIVED
		S delication of the second of
Tank Construction material:	ype of fluid:	HDPE PVD Other RECEIVED OIL CONS. DIV. DIS T. 3 Puttomatic overflow shut-off
Secondary containment with leak detection Visible sidewalls and liner Vis Liner Type. Thicknessmil		automatic overnow snut-off
5 Alternative Method:		
Submittal of an exception request is required. Exc	eptions must be submitted to the Santa Fe Envir	ronmental Bureau office for consideration of approval.

Fencing: Subsection D of 19 15.17 11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet X Alternate. Please specify 4' hogwire fence with a single strand of barbed wire on top. Netting: Subsection E of 19.15 17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Monthly inspections (If netting or screening is not physically feasible)							
Signs: Subsection C of 19.15.17 11 NMAC 12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers X Signed in compliance with 19.15.3.103 NMAC							
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19 15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for consideration of approval Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval	ideration of ap	proval.					
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.							
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes	XNo					
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes	XNo					
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	XNo					
(Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	NA						
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes XNA	No					
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	Yes	XNo					
- NM Office of the State Engineer - 1WATERS database search; Visual inspection (certification) of the proposed site.		_					
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes	X No					
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes	XNo					
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	Yes	X No					
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	Yes	XNo					
Within a 100-year floodplain - FEMA map	Yes	XNo					

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15 17.9 NMAC								
Instructions Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC								
Trydrogeologic Neport (Below grade Tanks) = based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 X								
X Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15 17.10 NMAC								
X Design Plan - based upon the appropriate requirements of 19 15.17.11 NMAC								
X Operating and Maintenance Plan - based upon the appropriate requirements of 19 15 17.12 NMAC								
X Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of								
19.15.17.9 NMAC and 19.15.17.13 NMAC								
Previously Approved Design (attach copy of design) API or Permit								
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19 15 17.9 NMAC Instructions: Each of the following items must be attached to the application. Pleave indicate, by a check mark in the box, that the documents are attached Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19 15 17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15.17 9 NMAC and 19.15 17.13 NMAC								
Previously Approved Design (attach copy of design) API								
Previously Approved Operating and Maintenance Plan API								
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15.17.19 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H2S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC								
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type. X Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method Waste Excavation and Removal Waste Removal (Closed-loop systems only) X On-site Closure Method (only for temporary pits and closed-loop systems) X In-place Burial On-site Trench Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)								
15								
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.								
Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC								
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15 17.13 NMAC								
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)								
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19 15.17 13 NMAC								
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC								
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15.17.13 NMAC								

Form C-144 Oil Conservation Division

16									
Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13 D NMAC) Instructions Please identify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more than two j	facilities								
are required.	l								
Disposal Facility Name: Disposal Facility Permit #-									
Disposal Facility Name Disposal Facility Permit #:									
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future service and operations? Yes (If yes, please provide the information No									
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specification - based upon the appropriate requirements of Subsection H of 19 15.17.13 NMA Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15 17 13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15 17.13 NMAC	c								
17									
Siting Criteria (Regarding on-site closure methods only: 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan Recommendations of acceptable source material are provided believe tain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the for consideration of approval Justifications and/or demonstrations of equivalency are required. Please refer to 19.15 17 10 NMAC for guidance									
Ground water is less than 50 feet below the bottom of the buried waste.	Yes X No								
- NM Office of the State Engineer - tWATERS database search, USGS: Data obtained from nearby wells	∐N/A								
Ground water is between 50 and 100 feet below the bottom of the buried waste	Yes X No								
- NM Office of the State Engineer - 1WATERS database search, USGS; Data obtained from nearby wells	N/A \								
Ground water is more than 100 feet below the bottom of the buried waste	X Yes No								
- NM Office of the State Engineer - IWATERS database search; USGS; Data obtained from nearby wells	N/A								
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).	Yes X No								
- Topographic map, Visual inspection (certification) of the proposed site									
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; satellite image	Yes X No								
Yes X No									
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the time of the initial application - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site									
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	Yes X No								
 Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland 	Yes X No								
- US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site									
Within the area overlying a subsurface mine.	Yes X No								
- Written confirantion or verification or map from the NM EMNRD-Mining and Mineral Division									
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society;	Yes X No								
Topographic map									
Within a 100-year floodplain FEMA map	Yes X No								
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must bee attached to the closure	re plan. Please indicate,								
by a check mark in the box, that the documents are attached. X Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15.17.10 NMAC									
X Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15.17.10 NMAC Topology Translation - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC									
Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC									
Construction/Design Plan of Temporary Pit (for in place burial of a drying pad) - based upon the appropriate requirements of I	9.15.17 11 NMAC								
X Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC									
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15 17.13 NMAC									
X Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC									
X Disposal Faculity Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards ca	nnot be achieved)								
 X Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17 13 NMAC X Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15.17.13 NMAC 									
X Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15.17.13 NMAC									


19				
Operator Application			to a Control of the smith of Control	
	formation submitted with this application is tr	•		
Name (Print):	Ethel Tally	Title:	Staff Regulatory Technician	
Signature:	Ceru Jalli	P		
e-mail address	Ethel.Tally@ConocoPhillips.com	Telephone	505-599-4027	
OCD Approval:	Permit Application (including closure plan	Closure Plan (only)) OCD Conditions (see attachment)	\
	1 1			
OCD Representative S	1/2 gray Now 1	Towell	Approval Date: 11-5-08	J
Title: Fu	liro/spec		mit Number:	
	11 0 7 3 500			
Instructions: Operators a report is required to be si		a prior to implementing any clos ompletion of the closure activiti e been completed	NC Sure activities and submitting the closure report. The closure less. Please do not complete this section of the form until an re Completion Date:	
22				
Closure Method:		,		
Waste Excavation	and Removal On-site Closure Me	thod Alternative Closur	re Method Waste Removal (Closed-loop systems only)	ļ
If different from a	approved plan, please explain.			
23				
	ng Waste Removal Closure For Closed-loop		Ground Steel Tanks or Haul-off Bins Only: ttings were disposed. Use attachment if more than two facilities	
were utilized.	njy the factuly or factules for where the aqu	ias, ariting jiutas ana ariti cut	aings were aisposea. Use aitachment if more than two facilities	i
Disposal Facility Nam	e:	Disposal Facılit	ty Permit Number.	
Disposal Facility Nam	e:	Disposal Facilit	ty Permit Number:	
Were the closed-loop	system operations and associated activities per	formed on or in areas that will i	not be used for future service and opeartions?	
Yes (If yes, please	e demonstrate complilane to the items below)	∐No		
	l areas which will not be used for future servic	e and operations:		
	(Photo Documentation) nd Cover Installation			
	plication Rates and Seeding Technique			
24 Closure Report Att	tachment Checklist: Instructions; Each of	the following items must be at	tached to the closure report. Please indicate, by a check mark in	
the box, that the docu		,		
	Notice (surface owner and division)			1
	lotice (required for on-site closure)			
	a-site closures and temporary pits)			
=	ampling Analytical Results (if applicable)			-
	Sampling Analytical Results (if applicable))		Ì
·	y Name and Permit Number			
	and Cover Installation			1
	pplication Rates and Seeding Technique			-
—	n (Photo Documentation)	I anaitede.	NAD 1027 1022	
On-site Closure	Location: Latitude:	Longitude	NAD	
25 Operator Closure Cer	tification:]
		s closure report is ture, accurat	te and complete to the best of my knowledge and belief I also certi,	ify that
the closure complies with	all applicable closure requirements and cond	itions specified in the approved	closure plan.	
Name (Print)		Title:		1
Signature		Date:		
e-mail address:		Telephone.		

New Mexico Office of the State Engineer POD Reports and Downloads

Township: 28N Range: 05W Sections: 16,17,18,19,20,21,28,29,30									
NAD27 X: Zone: Search Radius:									
County: Basin: Number: Suffix:									
Owner Name: (First) (Last) ONon-Domestic ODomestic									
POD / Surface Data Report Avg Depth to Water Report Water Column Report									
Clear Form iWATERS Menu Help									
WATER COLUMN REPORT 10/04/2008									

						3-5W 4-5	•				
	(quarter	s are	e big	ge	st to	o smalles	st)		Depth	Depth	Wat∈
POD Number	Tws	Rng	Sec	q (a a	Zone	x	Y	Well	Water	Colum
SJ 01893	28N	05W	18	4					390	290	1(
SJ 00047	28N	05W	28						465	265	2(
SJ 00036	28N	05W	28	3					303	243	ϵ

Record Count: 3

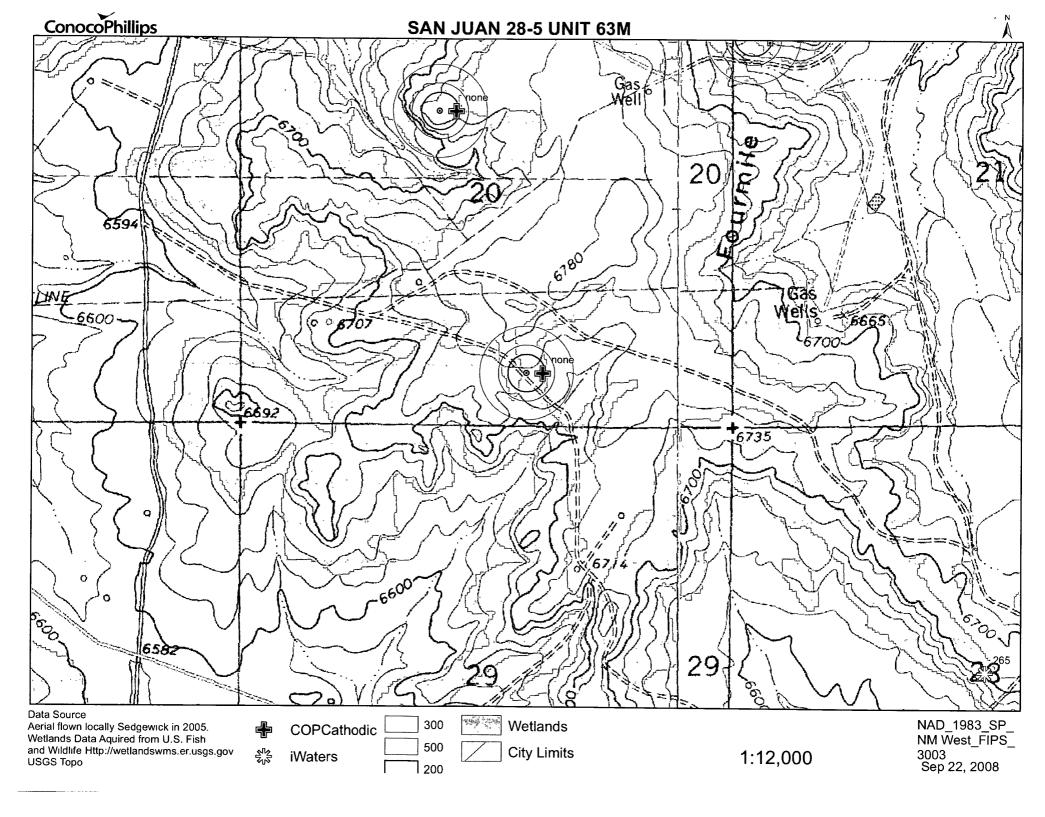

30-039-22231

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS NORTHWESTERN NEW MEXICO (Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SE Sec. 20 Twp 28 Rng 5
Name of Well/Wells or Pipeline Serviced SAN JUAN 28-5 UNIT #17A
cps 1600w
Elevation 6739'Completion Date 7/10/81 Total Depth 500' Land Type* N/A
Casing, Sizes, Types & Depths N/A
If Casing is cemented, show amounts & types usedN/A
If Cement or Bentonite Plugs have been placed, show depths & amounts used
Depths & thickness of water zones with description of water when possible: Fresh, Clear, Salty, Sulphur, Etc. WET SAND 170' WATER 260' NO SAMPLE
Depths gas encountered: N/A
Type & amount of coke breeze used: 6500 lbs.
Depths anodes placed: 455', 445', 430', 420', 380', 370', 360', 330', 320', 310'
Depths vent pipes placed: 494'
Vent pipe perforations: 240'
Remarks: gb #1 ,
OIL CON. DIV


If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

^{*}Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee. If Federal or Indian, add Lease Number.


E: Paso Natural Gas Company Form 7-238 (Rev. 11-71)


WELL CASING CATHODIC PROTECTION CONSTRUCTION REPORT DAILY LOG

Drilling Log (Attach Hereto).	(2 V/2	" D	\ Co	ompletion Dat	e <u>7//0/</u>	8/
Well Name	Location Location)	CPS No.		
S.J. 28-5 UMIT 17A Type & Size Bit Used 7. "	SE 20	-28-5		Work Order	00 W	
Type & Size Bit Used 6 7/4					25-21-	50-26
Anode Hole Depth Total Drilling Rig Tim Total Drilling Rig Tim	ne Total Lbs. Coke U	sed Lost Cir	rculation Mat'l Us	ed No Sacks N	fud Used	
Anode Depth		! _ /				
# 1 455 # 2 445 # 3 430 # 4 Anode Output (Amps)	420 25 380	÷ 6 3 70	7 360	± 8 330	-9 320	# 10 3/0
#1 3.2 #2 3.4 #3 3.8 #4	3.6 = 5 4.1	: 6 3.9	= 7 30	8 3.0	129 J. 9	# 10 4.3
Anode Depth # 12 # 13 # 14	4 = 15	# 16	i= 17	: = 18	# 19	 # 20
Anode Output (Amps)	1	!			1	1
# 11	4 - 1: 15	≈ 16 No. 8 C.P Co	tble Used	': 18	19 No. 2 C.P. Co	rble Used
Volts /2. / Amps / 7. 2	Ohms .7					
Remarks: STATIC 600 S = .86	V Drille	ed To	980 H	It we i	- saud	AT .170
HIT WATER AT 260, Approx	,			•		. ,
A.M. Did NoT get exoug	1 To MAKE	WATER	SAMPLE	. Dril	Led To	500
Logged 494. INSTALLE	d 494 of	I'P.V.C.	VELT 1	ioe Per	ferai	ed 240.
Coke Breeze WAS HAU	_	•	•	•		
DiTeh + 1 cable = 198 extra cable = 143			/	All Constru	ction Complet	ed
				(Si	gnature)	
40 V 16 A Rec T	GROUND BED	LAYOUT SKE	тсн 🗸		-	
Stub Pole						
HoLe DepTh -6'		L				
	, i	X	121'			Water St.
			13		<u></u>	
			~	7		
			•			N
			,			
				i.,	•	
	Reg. O. T.		•	75		
Hrs	8 2	•		1.		The state of the s
DISTRIBUTION:				1		The American
WHITE - Division Corrosion Office			م موسی داشد. الانتخاب الآن		٠ ١ ١ ١ ١ ١	
YELLOW - Area Corrosion Office PINK - Originator File			· / / / / / / / / / / / / / / / / / / /	\otimes	· :	San

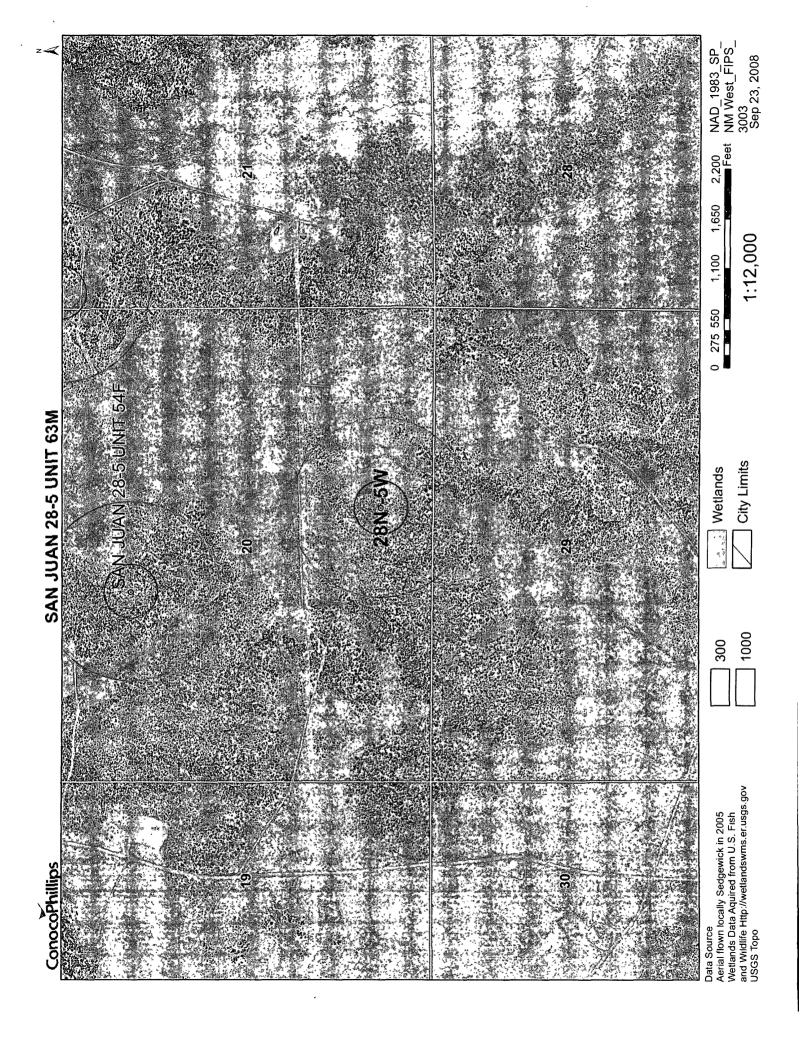


SJ 28-5 UNIT 63M/MINES, MILLS AND QUARRIES MAP

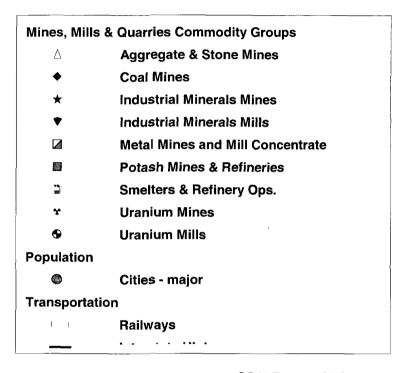

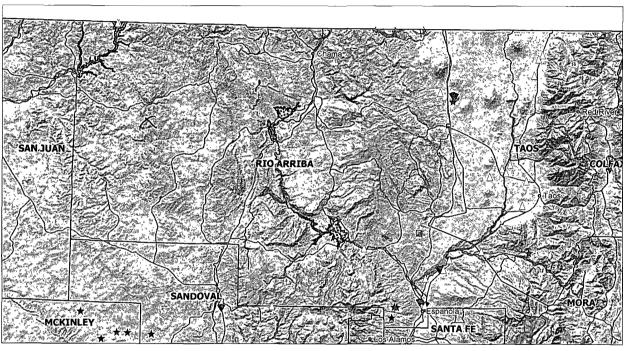





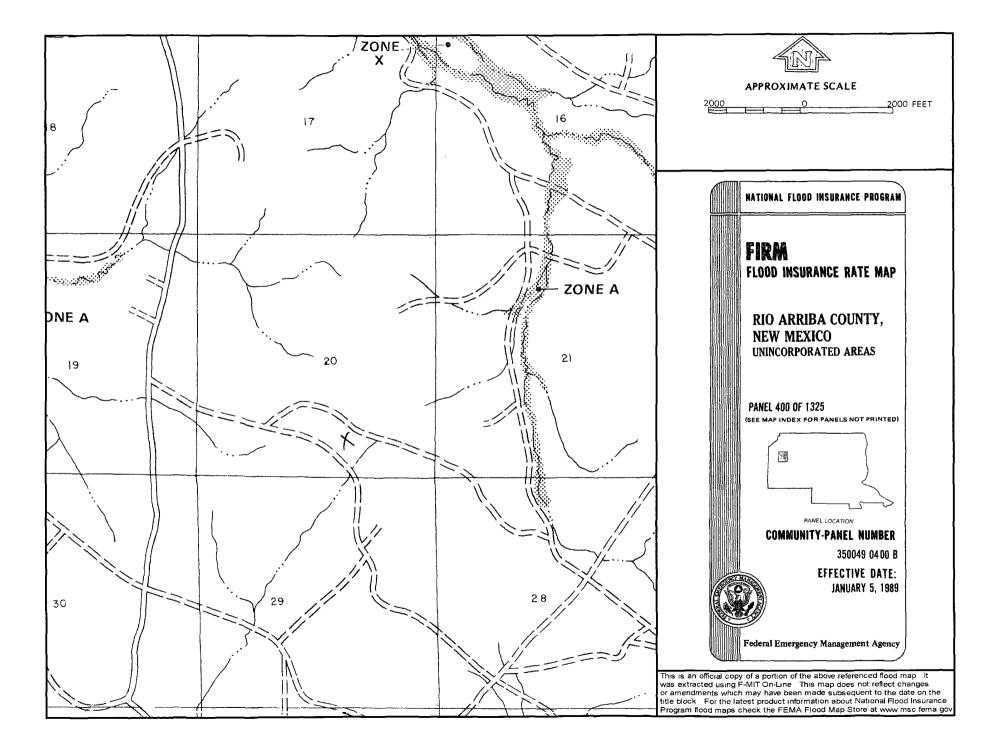

Siting Criteria Compliance Demonstration & Hydro Geologic Analysis

The San Juan 28-5 Unit 63M is not located in an unstable area. The location is not over a mine and is not on the side of a hill as indicated on the Mines, Mills and Quarries Map and Topographic Map. The location of the excavated pit material will not be located within 300' of any continuously flowing watercourse or 200' from any other watercourse as indicated on the Topographic Map. The location is not within a 100-year floodplain area as indicated on the FEMA Map. The groundwater depth is considered to be greater than 100' as determined by the topographic map and the Cathodic well data from the San Juan 28-5 Unit 17A with an elevation of 6739' and groundwater depth of 150'. The subject well has an elevation of 6724' which is greater than the San Juan 28-5 Unit 17A, therefore the groundwater depth is greater than 150'. The iWATERS data points are located in section 18 and 28 are depths of 290' and 265' as indicated on the TOPO Map. Using these data points and the cathodic data provided the indication of groundwater depth and the San Jose formation will create a stable area for this new location.

Hydrogeological report for San Juan 28-5 Unit 63M

Regional Hydrogeological context:

The San Jose Formation of Eocene age occurs in New Mexico and Colorado, and its outcrop forms the land surface over much of the eastern half of the central basin. It overlies the Nacimiento Formation in the area generally south of the Colorado-New Mexico State line and overlies the Animas Formation in the area generally north of the State line.

The San Jose Formation was deposited in various fluvial-type environments. In general, the unit consists of an interbedded sequence of sandstone, siltstone, and variegated shale. Thickness of the San Jose Formation generally increases from west to east (200 feet in the west and south to almost 2,700 feet in the center of the structural basin). Ground water is associated with alluvial and fluvial sandstone aquifers. Thus, the occurrence of ground water is mainly controlled by the distribution of sandstone in the formation. The distribution of such sandstone is the result of original depositional extent plus any post-depositional modifications, namely erosion and structural deformation. Transmissivity data for San Jose Formation are minimal. Values of 40 and 120 feet squared per day were determined from two aquifer tests (Stone et al, 1983, table 5). The reported or measured discharge from 46 water wells completed in San Jose Formation ranges from 0.15 to 61 gallons per minute and the median is 5 gallons per minute. Most of the wells provide water for livestock and domestic use.

The San Jose Formation is a very suitable unit for recharge from precipitation because soils that form on the unit are sandy and highly permeable and therefore readily adsorb precipitation. However, low annual precipitation, relatively high transpiration and evaporation rates, and deep dissection of the San Jose Formation by the San Juan River and its tributaries all tend to reduce the effective recharge to the unit.

Stone et al., 1983, Hydrogeology and Water Resources of the San Juan Basin, New Mexico: Socorro, New Mexico Bureau of Mines and Mineral Resources Hydrologic Report 6, 70 p.

Tafoya, Crystal

From:

Tafoya, Crystal

Sent:

Thursday, July 10, 2008 8:16 AM

To: Subject:

'mark_kelly@nm.blm.gov'
OCD Pit Closure Notification

The following temporary pits will be closed on-site. The new OCD Pit Rule 17 requires the surface owner be notified. Please feel free to contact me at any time if you have any questions. Thank you!

Allison Unit 2B

Allison Unit 40N

Angel Peak B 27E

Ballard 11F

Cain 725S

Canyon Largo Unit 250N

Canyon Largo Unit 279E

Canyon Largo Unit 288E

Canyon largo Unit 297E

Canyon Largo Unit 465E

Carson SRC 4E

Day B 4P

Day B 5A

East 17S

EPNG A 1B

EPNG B 1M

Federal A 1E

Filan 5M

Filan 5N

Fogelson 4 100

Fogelson 4 100S

Grambling C 202S

Hagood 19

Hamner 9S

Hardie 4P

Hare 295

Heaton Com 100

Helms Federal 1G

Howell 12

Huerfanito Unit 103F

Huerfanito Unit 29S

Huerfanito Unit 39S

Huerfanito Unit 47S

Huerfanito Unit 50E

Huerfanito Unit 75E

Huerfanito Unit 83E

Huerfanito Unit 87E

Huerfanito Unit 90E

Huerfanito Unit 90M

Huerfanito Unit 98S

Huerfano Unit 108F

Huerfano Unit 282E

Huerfano unit 305

Huerfano unit 307

Huerfano Unit 554

Johnston Federal 24S

King 3

Lackey A Com 100S

Lambe 1C

Lambe 7S

Lively 8M

Lloyd A 100

Lloyd A 100S

Martin 100

McCord B 1F

McDurmitt Com 100S

McManus 13R

Mitchell 1S

Morris A 14

Newberry B 1N

Newsom B 503

Newsom B 8N

Pierce A 210S

Roelofs 1N

San Juan 27-4 Unit 132G

San Juan 27-4 Unit 132M

San Juan 27-4 Unit 139N

San Juan 27-4 Unit 140B

San Juan 27-4 Unit 141M

San Juan 27-4 Unit 147Y

San Juan 27-4 Unit 153B

San Juan 27-4 Unit 22M

San Juan 27-4 Unit 38P

San Juan 27-4 Unit 41N

San Juan 27-4 Unit 42N

San Juan 27-4 Unit 569N

San Juan 27-4 Unit 59N

San Juan 27-4 Unit 60M

San Juan 27-5 Unit 113F

San Juan 27-5 Unit 59N

San Juan 27-5 Unit 84N

San Juan 27-5 unit 901

San Juan 27-5 Unit 902

San Juan 27-5 Unit 903

San Juan 27-5 Unit 904

San Juan 27-5 Unit 905

San Juan 27-5 Unit 906

San Juan 27-5 Unit 907 San Juan 27-5 Unit 908

San Juan 27-5 Unit 909

San Juan 27-5 Unit 910

San Juan 27-5 Unit 912

San Juan 27-5 Unit 913

San Juan 27-5 Unit 914

San Juan 27-5 Unit 915

San Juan 27-5 Unit POW 916

San Juan 28-4 Unit 27M

San Juan 28-5 Unit 54F

San Juan 28-5 Unit 62E

San Juan 28-5 Unit 63M

San Juan 28-5 Unit 76N

San Juan 28-5 Unit 77N

San Juan 28-6 Unit 113N

San Juan 28-6 Unit 459S

San Juan 28-7 Unit 151E

San Juan 28-7 Unit 195P

San Juan 29-6 Unit 22N

San Juan 29-6 Unit 8M

San Juan 29-7 Unit 30N

San Juan 29-7 Unit 57E

San Juan 29-7 unit 587

San Juan 29-7 Unit 588

San Juan 29-7 unit 589

San Juan 29-7 Unit 60N

San Juan 29-7 unit 67M

San Juan 29-7 Unit 70M

San Juan 30-5 Unit 27F

San Juan 30-5 Unit 71F San Juan 30-5 Unit 73N

San Juan 30-6 Unit 441S

San Juan 31-6 Unit 24F

San Juan 31-6 Unit 27M

San Juan 31-6 Unit 31P

San Juan 31-6 Unit 39M

San Juan 31-6 Unit 3M

San Juan 31-6 Unit 45N San Juan 31-6 Unit 49P

San Juan 31-6 Unit 4N

San Juan 31-6 Unit 4P

San Juan 31-6 Unit 6F

San Juan 31-6 Unit 7M

San Juan 31-6 Unit 8N

San Juan 32-7 Unit 18M

San Juan 32-7 Unit 19A

San Juan 32-7 Unit 71A

San Juan 32-7 Unit Com 20

San Juan 32-8 Unit 18N

San Juan 32-8 Unit 30M

San Juan 32-8 Unit 49M

Storey B LS 100

Storey B LS 100S

Sunray E 221S

Sunray G 2C

Vaughn 15N

Wood 3M

Wood 3N

Crystal L. Tafoya Regulatory Technician ConocoPhillips Company San Juan Business Unit

Phone: (505) 326-9837

Email: Crystal.Tafoya@conocophillips.com

District I 1625 N French Dr., Hobbs, NM 88240 State of New Mexico . Energy, Minerals & Natural Resources Department

District II 1301 W. Grand Avenue, Artesia, NM 88210

District III 1000 Rio Brazos Rd. Aztec, NM 87410

'API Number

District IV 1220 S St Francis Dr., Santa Fe, NM 87505

OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe. NM 87505

Pool Code


Form C-102
Revised October 12, 2005
Instructions on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

	72319 / 71599 BLANCO MESAVERDE / BASIN DAKOTA								AKOTA
¹ Property	Code			⁵Well Number 53M					
ZOCOTO A					SAN JUAN				*Elevation
'ogrid N 14538	· I		*Operator Name BURLINGTON RESOURCES OIL & GAS COMPANY, LP						
					¹⁰ Surface	Location			
UL or lot no	Sect 10n	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County RIO
0	20	28N	5W		515	SOUTH	2210	EAST	ARRIBA
		11 Bo	ottom	Hole L	ocation 1	f Different	From Surf	ace	
UL or lot no	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
								.`	
¹² Dedicated Acres	J2U.L) Acres) Acres			¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No		

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

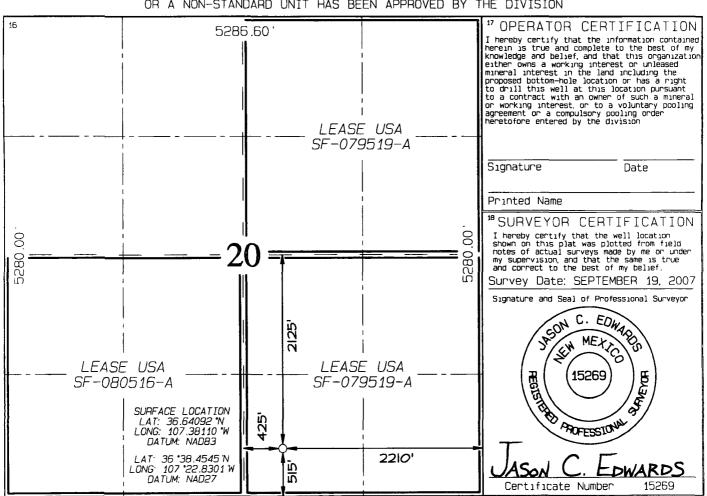

Burlington Resources Oil & Gas Company, LP San Juan Basin Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of pit closure. Closure report will be filed on C-144 and incorporate the following:

- Details on Capping and Covering, where applicable.
- Plot Plan (Pit Diagram)
- Inspection Reports
- Sampling Results
- C-105
- Copy of Deed Notice will be filed with County Clerk

General Plan:

- All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves. The facilities to be used will be Basin Disposal (Permit #NM-01-005) and Envirotech Land Farm (Permit #NM-01-011).
- 2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.
- 3. The surface owner shall be notified of BR's closing of the temporary pit prior to closure as per the approved closure plan via certified mail, return receipt requested.
- 4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.
- 5. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - Location by Unit Letter, Section, Township, and Range. Well name and API number.
- 6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at the San Juan County Landfill located on CR 3100.
- 7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.
- 8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

Components	Tests Method	Limit (mg/Kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	2500
GRO/DRO	EPA SW-846 8015M	500
Chlorides	EPA 300.1	(1000/\$00
	,	

- 9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.
- 10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.
- 11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011
- 12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Reshaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 13. Notification will be sent to OCD when the reclaimed area is seeded.
- 14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Туре	Variety or Cultivator	PLS/A
Western wheatgrass	Arriba	3.0
Indian ricegrass	Paloma or Rimrock	3.0
Slender wheatgrass	San Luis	2.0
Crested wheatgrass	Hy-crest	3.0
Bottlebrush Squirreltail	Unknown	2.0
Four-wing Saltbrush	Delar	.25

Species shall be planted in pounds of pure live seed per acre: Present Pure Live Seed (PLS) = Purity X Germination/100 Two lots of seed can be compared on the basis of PLS as follows:

Source No. One (poor quality)

Purity

50 percent

Germination

40 percent

Percent PLS

20 percent

Source No. two (better quality)

Purity

80 percent

Germination

63 percent

Percent PLS

50 percent

5 lb. bulk seed required to make 2 lb. bulk seed required to make

1 lb. PLS

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.